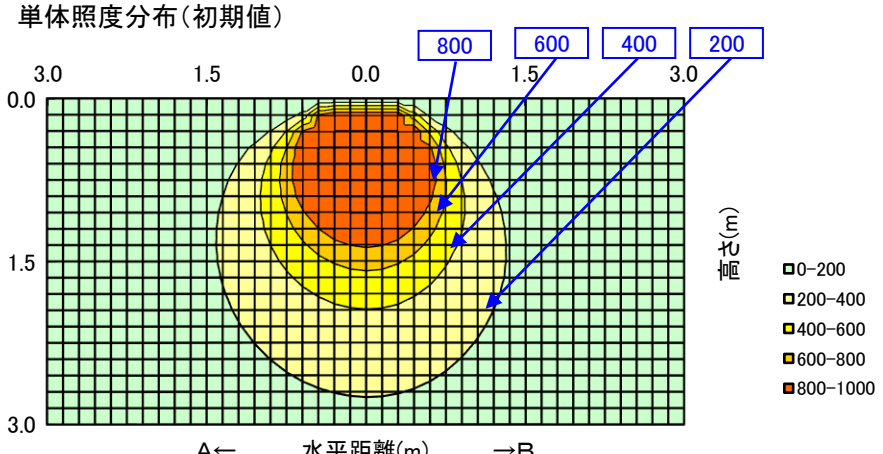
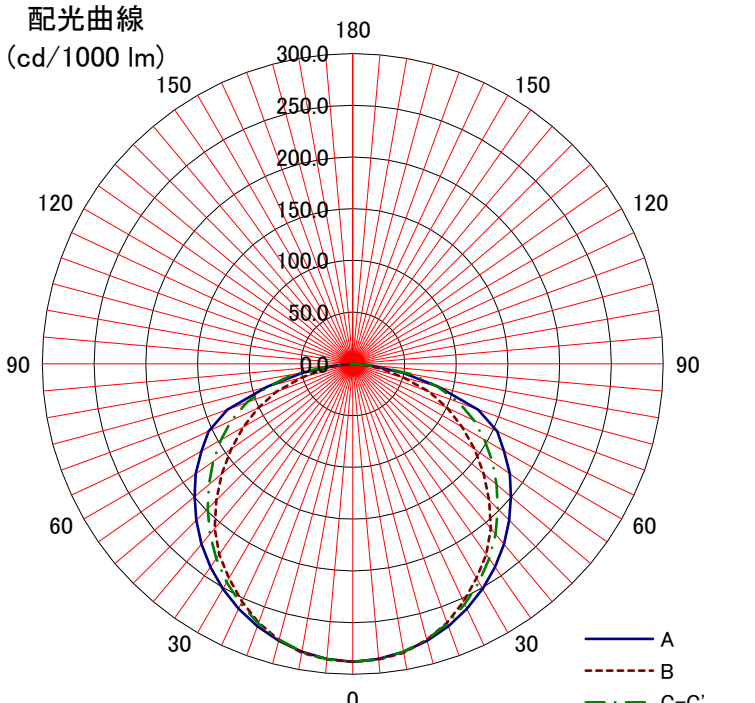


日立照明器具 照明特性																																																																																																																																								
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%																																																																																																																								
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
		床	10%														0%																																																																																																																							
形式: NME4223-XM14E	室指数	照明率 S/H=1.0																																																																																																																																						
<備考>	0.6	0.51	0.40	0.33	0.50	0.39	0.33	0.28	0.38	0.32	0.28	0.37	0.32	0.28	0.26																																																																																																																									
	0.8	0.59	0.49	0.42	0.58	0.48	0.41	0.36	0.47	0.41	0.36	0.46	0.40	0.36	0.34																																																																																																																									
姿図 	1	0.65	0.55	0.48	0.64	0.54	0.48	0.42	0.53	0.47	0.42	0.52	0.46	0.42	0.40																																																																																																																									
	1.25	0.71	0.61	0.55	0.69	0.61	0.54	0.49	0.59	0.53	0.49	0.57	0.52	0.48	0.46																																																																																																																									
	1.5	0.75	0.66	0.60	0.73	0.65	0.59	0.54	0.64	0.58	0.54	0.62	0.57	0.53	0.51																																																																																																																									
	2	0.80	0.73	0.67	0.78	0.72	0.67	0.62	0.70	0.65	0.62	0.68	0.64	0.61	0.59																																																																																																																									
	2.5	0.83	0.77	0.72	0.82	0.76	0.71	0.67	0.74	0.70	0.66	0.72	0.69	0.66	0.63																																																																																																																									
	3	0.85	0.80	0.75	0.84	0.79	0.75	0.71	0.77	0.73	0.70	0.75	0.72	0.69	0.67																																																																																																																									
	4	0.88	0.84	0.80	0.87	0.83	0.79	0.76	0.81	0.78	0.75	0.79	0.76	0.74	0.72																																																																																																																									
光源	5	0.90	0.87	0.83	0.89	0.86	0.83	0.80	0.83	0.81	0.79	0.81	0.79	0.77	0.75																																																																																																																									
品名 直管形LEDランプ	7	0.92	0.90	0.88	0.91	0.89	0.87	0.85	0.87	0.85	0.83	0.85	0.83	0.82	0.79																																																																																																																									
形式 LDK40SS・D/17/26NE	10	0.94	0.92	0.91	0.93	0.91	0.90	0.88	0.89	0.88	0.87	0.87	0.86	0.85	0.83																																																																																																																									
光束 5,240 lm																																																																																																																																								
器具効率 Ft= 90.0%		単体照度分布(初期値) 																																																																																																																																						
上方光束 Fu= 0.0%																																																																																																																																								
下方光束 Fd= 90.0%																																																																																																																																								
最大取付間隔		配光曲線 (cd/1000 lm) 																																																																																																																																						
A-A 1.32 H																																																																																																																																								
B-B 1.24 H																																																																																																																																								
保守率																																																																																																																																								
良	0.86	<table><thead><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr></thead><tbody><tr><td>0</td><td>288</td><td>288</td><td>288</td><td></td><td></td></tr><tr><td>10</td><td>283</td><td>284</td><td>283</td><td></td><td></td></tr><tr><td>20</td><td>270</td><td>266</td><td>267</td><td></td><td></td></tr><tr><td>30</td><td>251</td><td>239</td><td>244</td><td></td><td></td></tr><tr><td>40</td><td>228</td><td>208</td><td>215</td><td></td><td></td></tr><tr><td>50</td><td>200</td><td>165</td><td>181</td><td></td><td></td></tr><tr><td>60</td><td>169</td><td>122</td><td>147</td><td></td><td></td></tr><tr><td>70</td><td>129</td><td>79</td><td>109</td><td></td><td></td></tr><tr><td>80</td><td>50</td><td>29</td><td>59</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>																A-0	B-B	C-0	A'-0	C'-0	0	288	288	288			10	283	284	283			20	270	266	267			30	251	239	244			40	228	208	215			50	200	165	181			60	169	122	147			70	129	79	109			80	50	29	59			90						100						110						120						130						140						150						160						170						180					
	A-0																B-B	C-0	A'-0	C'-0																																																																																																																				
0	288																288	288																																																																																																																						
10	283																284	283																																																																																																																						
20	270																266	267																																																																																																																						
30	251																239	244																																																																																																																						
40	228																208	215																																																																																																																						
50	200																165	181																																																																																																																						
60	169																122	147																																																																																																																						
70	129																79	109																																																																																																																						
80	50	29	59																																																																																																																																					
90																																																																																																																																								
100																																																																																																																																								
110																																																																																																																																								
120																																																																																																																																								
130																																																																																																																																								
140																																																																																																																																								
150																																																																																																																																								
160																																																																																																																																								
170																																																																																																																																								
180																																																																																																																																								
中	0.81																																																																																																																																							
否	0.72																																																																																																																																							
光度 (cd/1000 lm)																																																																																																																																								