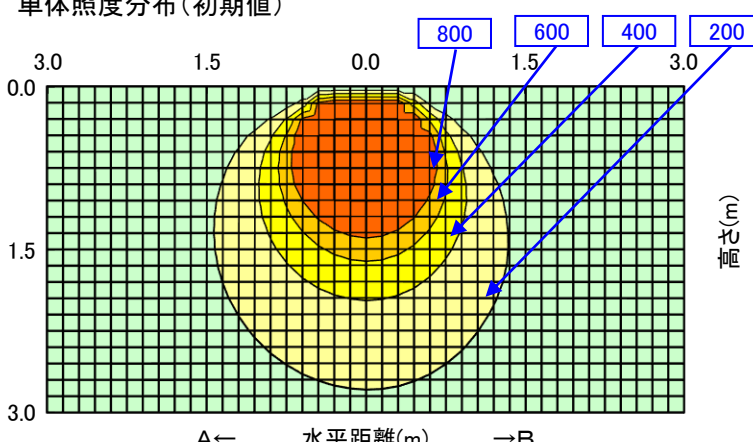
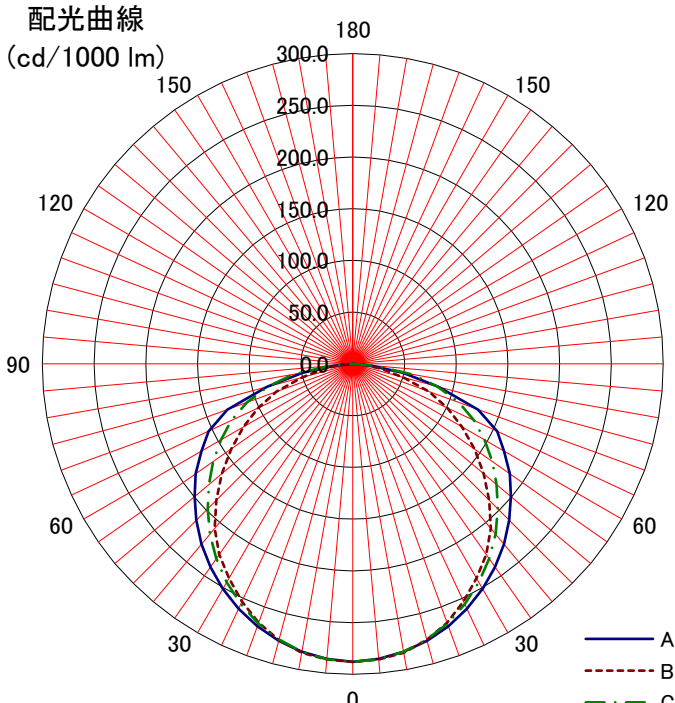


日立照明器具 照明特性																	
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
形式: NME4223-XM14E		床	10%														0%
<備考>	室指数	照明率 S/H=1.0															
		0.6	0.51	0.40	0.33	0.50	0.39	0.33	0.28	0.38	0.32	0.28	0.37	0.32	0.28	0.26	
姿図 	0.8	0.59	0.49	0.42	0.58	0.48	0.41	0.36	0.47	0.41	0.36	0.46	0.40	0.36	0.34		
	1	0.65	0.55	0.48	0.64	0.54	0.48	0.42	0.53	0.47	0.42	0.52	0.46	0.42	0.40		
	1.25	0.71	0.61	0.55	0.69	0.61	0.54	0.49	0.59	0.53	0.49	0.57	0.52	0.48	0.46		
	1.5	0.75	0.66	0.60	0.73	0.65	0.59	0.54	0.64	0.58	0.54	0.62	0.57	0.53	0.51		
	2	0.80	0.73	0.67	0.78	0.72	0.67	0.62	0.70	0.65	0.62	0.68	0.64	0.61	0.59		
	2.5	0.83	0.77	0.72	0.82	0.76	0.71	0.67	0.74	0.70	0.66	0.72	0.69	0.66	0.63		
	3	0.85	0.80	0.75	0.84	0.79	0.75	0.71	0.77	0.73	0.70	0.75	0.72	0.69	0.67		
光源	4	0.88	0.84	0.80	0.87	0.83	0.79	0.76	0.81	0.78	0.75	0.79	0.76	0.74	0.72		
品名 直管形LEDランプ	5	0.90	0.87	0.83	0.89	0.86	0.83	0.80	0.83	0.81	0.79	0.81	0.79	0.77	0.75		
形式 LDK40SS・N/17/27NE	7	0.92	0.90	0.88	0.91	0.89	0.87	0.85	0.87	0.85	0.83	0.85	0.83	0.82	0.79		
光束 5,400 lm	10	0.94	0.92	0.91	0.93	0.91	0.90	0.88	0.89	0.88	0.87	0.87	0.86	0.85	0.83		
器具効率 Ft= 90.0%		単体照度分布 (初期値) 															
上方光束 Fu= 0.0%																	
下方光束 Fd= 90.0%																	
最大取付間隔																	
A-A 1.32 H																	
B-B 1.24 H																	
保守率	良	0.86															
	中	0.81															
	否	0.72															
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 															
	A-0	B-B	C-0	A'-0	C'-0												
0	288	288	288														
10	283	284	283														
20	270	266	267														
30	251	239	244														
40	228	208	215														
50	200	165	181														
60	169	122	147														
70	129	79	109														
80	50	29	59														
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	