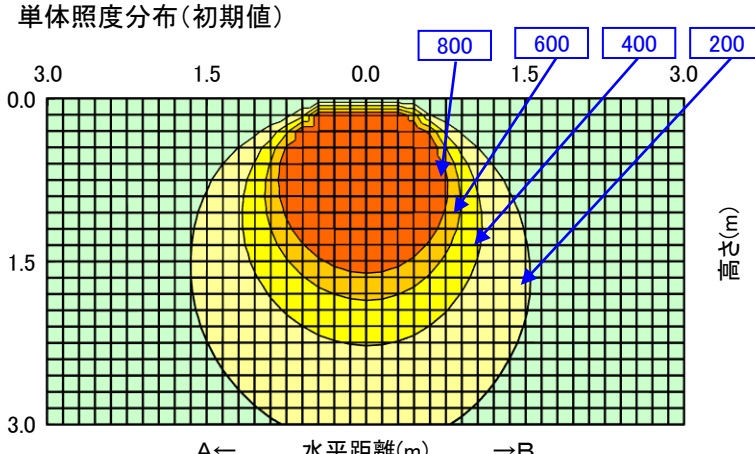
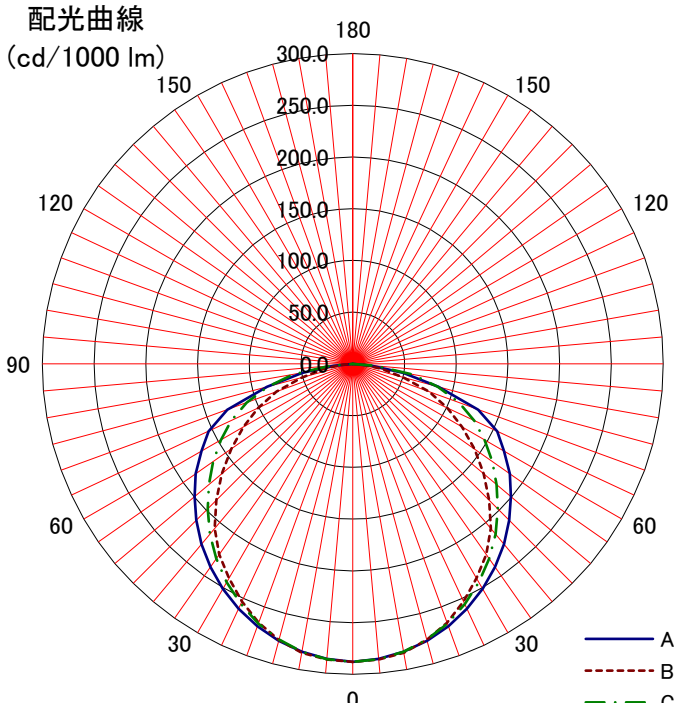


日立照明器具 照明特性																
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
形式: NME4223-XM14E	室指数	照明率 S/H=1.0														
<備考>	0.6	0.51	0.40	0.33	0.50	0.39	0.33	0.28	0.38	0.32	0.28	0.37	0.32	0.28	0.26	
	0.8	0.59	0.49	0.42	0.58	0.48	0.41	0.36	0.47	0.41	0.36	0.46	0.40	0.36	0.34	
姿図 	1	0.65	0.55	0.48	0.64	0.54	0.48	0.42	0.53	0.47	0.42	0.52	0.46	0.42	0.40	
	1.25	0.71	0.61	0.55	0.69	0.61	0.54	0.49	0.59	0.53	0.49	0.57	0.52	0.48	0.46	
	1.5	0.75	0.66	0.60	0.73	0.65	0.59	0.54	0.64	0.58	0.54	0.62	0.57	0.53	0.51	
	2	0.80	0.73	0.67	0.78	0.72	0.67	0.62	0.70	0.65	0.62	0.68	0.64	0.61	0.59	
	2.5	0.83	0.77	0.72	0.82	0.76	0.71	0.67	0.74	0.70	0.66	0.72	0.69	0.66	0.63	
	3	0.85	0.80	0.75	0.84	0.79	0.75	0.71	0.77	0.73	0.70	0.75	0.72	0.69	0.67	
	4	0.88	0.84	0.80	0.87	0.83	0.79	0.76	0.81	0.78	0.75	0.79	0.76	0.74	0.72	
光源	5	0.90	0.87	0.83	0.89	0.86	0.83	0.80	0.83	0.81	0.79	0.81	0.79	0.77	0.75	
品名 直管形LEDランプ	7	0.92	0.90	0.88	0.91	0.89	0.87	0.85	0.87	0.85	0.83	0.85	0.83	0.82	0.79	
形式 LDK40SS・N/22/36NE	10	0.94	0.92	0.91	0.93	0.91	0.90	0.88	0.89	0.88	0.87	0.87	0.86	0.85	0.83	
光束 7,200 lm																
器具効率 Ft= 90.0%		単体照度分布(初期値)  (m) 0-200 200-400 400-600 600-800 800-1000														
上方光束 Fu= 0.0%																
下方光束 Fd= 90.0%																
最大取付間隔																
A-A 1.32 H																
B-B 1.24 H																
保守率	良	0.86														
	中	0.81														
	否	0.72														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	288	288	288													
10	283	284	283													
20	270	266	267													
30	251	239	244													
40	228	208	215													
50	200	165	181													
60	169	122	147													
70	129	79	109													
80	50	29	59													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																

配光曲線 (cd/1000 lm)					
					
A B C-C'					