
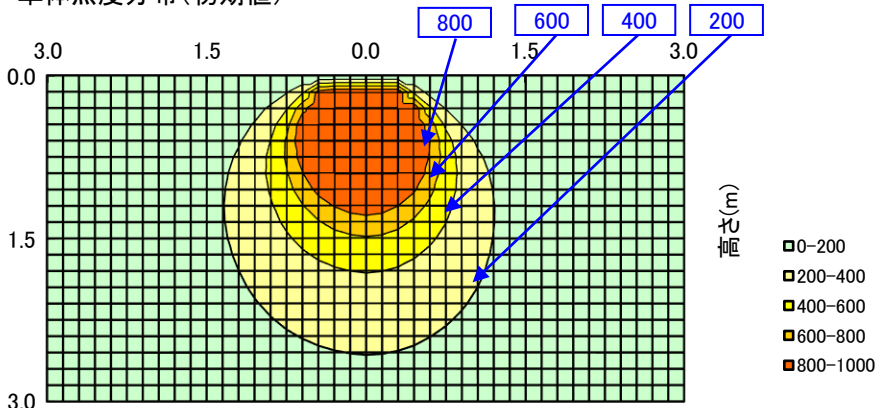
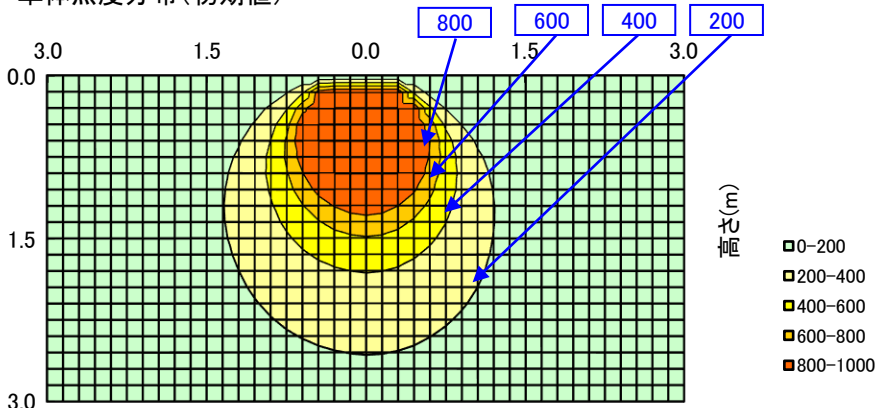
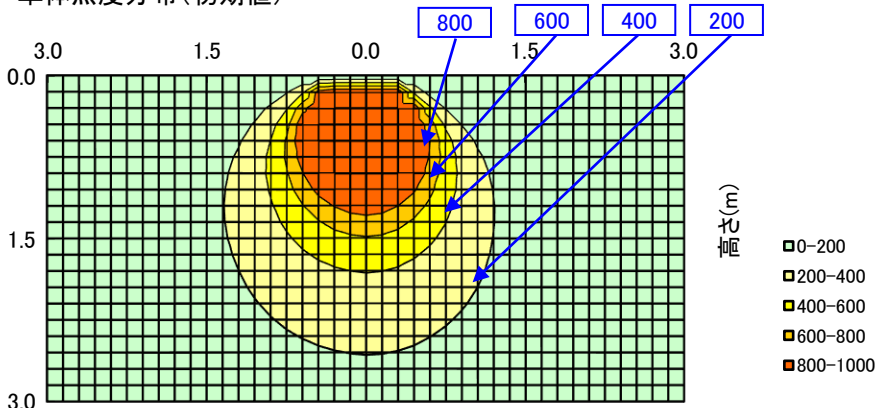
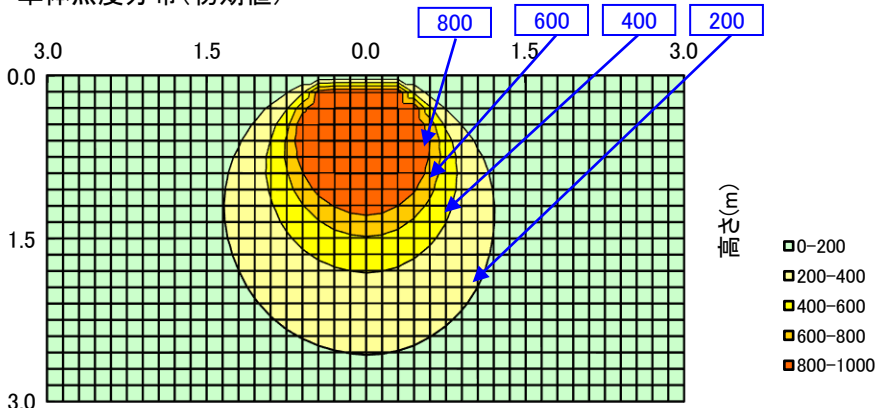
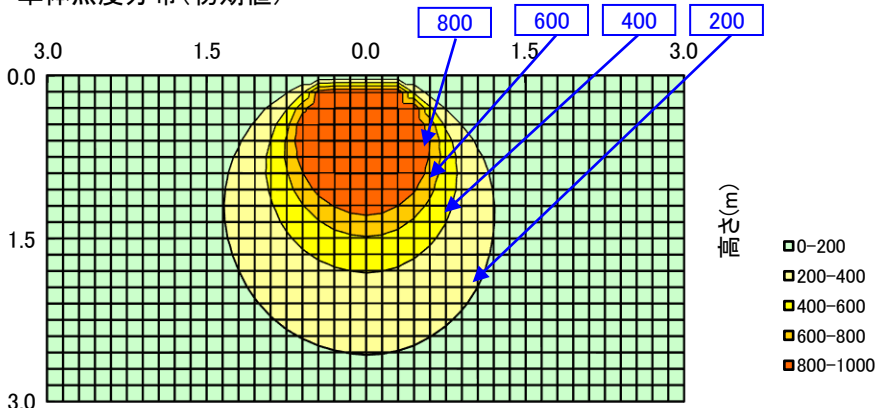
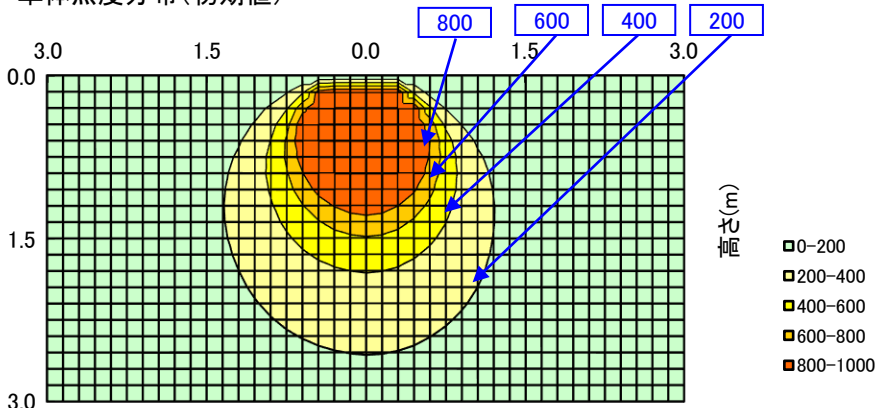
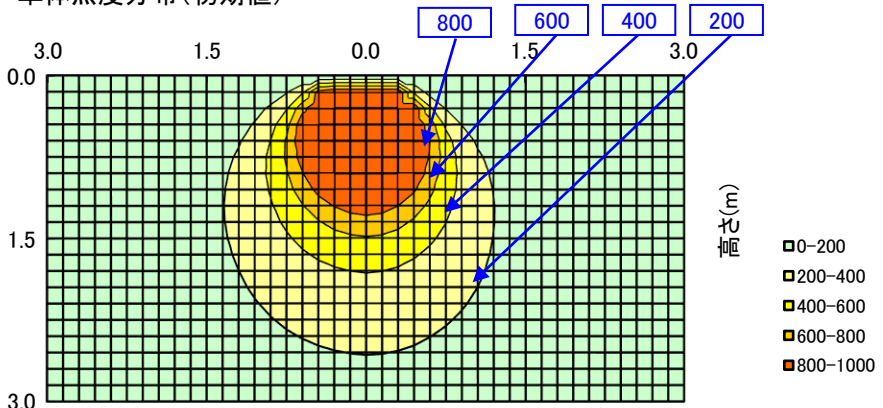
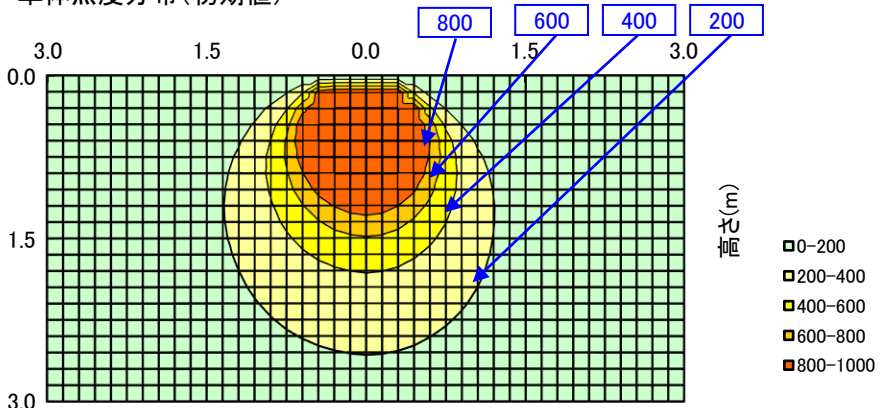
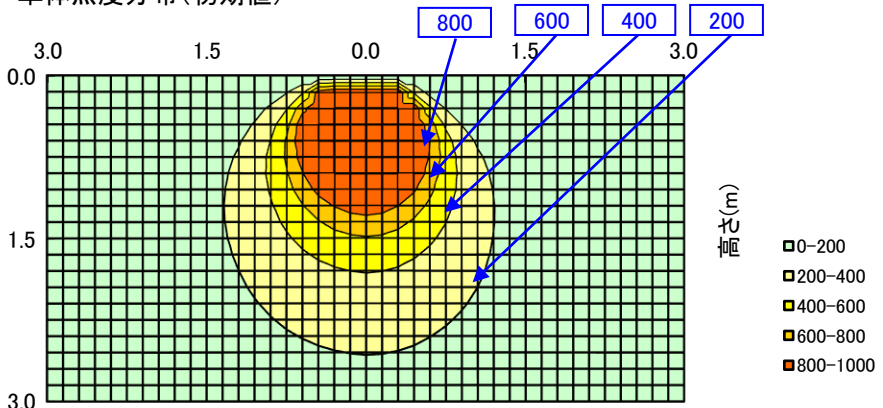
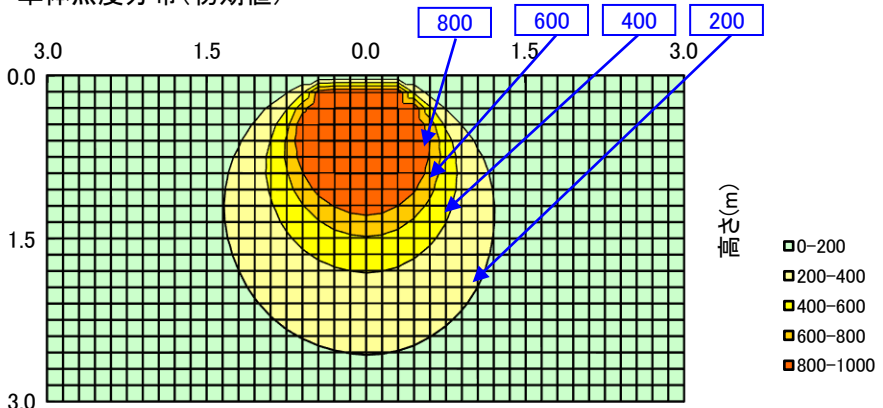
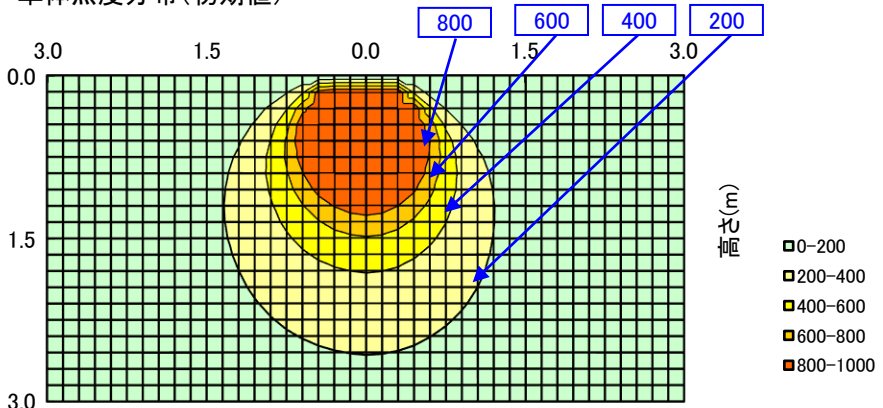


日立照明器具 照明特性																
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: NME8105-XM14E	室指数	照明率 S/H=1.0														
<備考>	0.6	0.52	0.40	0.33	0.50	0.39	0.32	0.27	0.37	0.31	0.26	0.35	0.30	0.25	0.23	
	0.8	0.61	0.49	0.41	0.59	0.48	0.41	0.35	0.45	0.39	0.34	0.43	0.37	0.33	0.30	
姿図 	1	0.67	0.56	0.48	0.64	0.54	0.47	0.41	0.51	0.45	0.40	0.49	0.43	0.38	0.35	
	1.25	0.72	0.62	0.54	0.70	0.60	0.53	0.48	0.57	0.51	0.46	0.54	0.49	0.44	0.40	
	1.5	0.76	0.67	0.60	0.74	0.65	0.58	0.53	0.62	0.56	0.51	0.58	0.53	0.49	0.45	
	2	0.82	0.74	0.67	0.79	0.72	0.66	0.61	0.68	0.63	0.58	0.64	0.60	0.56	0.51	
	2.5	0.85	0.78	0.72	0.83	0.76	0.71	0.66	0.72	0.67	0.63	0.68	0.64	0.61	0.56	
	3	0.88	0.81	0.76	0.85	0.79	0.74	0.70	0.75	0.71	0.67	0.71	0.67	0.64	0.59	
光源	4	0.91	0.86	0.81	0.88	0.83	0.79	0.75	0.79	0.75	0.72	0.75	0.72	0.69	0.64	
品名 直管形LEDランプ	5	0.93	0.89	0.85	0.90	0.86	0.83	0.79	0.82	0.79	0.76	0.77	0.75	0.73	0.67	
形式 LDK40SS・D/17/26NE	7	0.96	0.92	0.89	0.93	0.90	0.87	0.84	0.85	0.83	0.81	0.81	0.79	0.77	0.71	
光束 5,240 lm	10	0.98	0.95	0.93	0.95	0.93	0.91	0.89	0.88	0.87	0.85	0.84	0.82	0.81	0.75	
器具効率 Ft= 96.9%		単体照度分布(初期値) 														
上方光束 Fu= 12.1%																
下方光束 Fd= 84.8%																
最大取付間隔		配光曲線 														
A-A 1.32 H																
B-B 1.24 H																
保守率	良	0.88	配光曲線 													
	中	0.86														
	否	0.81														
光度 (cd/1000 lm)		配光曲線 														
	A-0	B-B	C-0	A'-0	C'-0	配光曲線 										
0	252	252	252													
10	248	248	248													
20	239	232	235			配光曲線 										
30	222	208	215													
40	201	174	187													
50	181	141	161			配光曲線 										
60	153	101	129													
70	127	58	99													
80	106	22	77			配光曲線 										
90	82		53													
100	62		37													
110	48		27			配光曲線 										
120	36		19													
130	24		13													
140	17		5			配光曲線 										
150	3															
160	1					配光曲線 										
170	1															
180						配光曲線 