


日立照明器具 照明特性

名称: 交換形LEDト77形	天井	反射率	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
形式: PC4A	室指数	固有照明率 S/H=1.0															
<備考>	0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.41	0.34	0.30	0.28		
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.51	0.44	0.39	0.50	0.44	0.39	0.36		
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.52	0.47	0.58	0.51	0.46	0.56	0.50	0.45	0.43		
	1.25	0.78	0.68	0.60	0.76	0.67	0.59	0.54	0.64	0.58	0.53	0.62	0.57	0.52	0.49		
	1.5	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.69	0.63	0.59	0.67	0.62	0.58	0.55		
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.73	0.69	0.65	0.62		
	2.5	0.91	0.85	0.79	0.89	0.83	0.78	0.73	0.80	0.76	0.72	0.77	0.74	0.70	0.67		
	3	0.94	0.88	0.83	0.92	0.86	0.81	0.77	0.83	0.79	0.76	0.80	0.77	0.74	0.70		
	4	0.97	0.92	0.88	0.95	0.90	0.86	0.83	0.87	0.84	0.81	0.84	0.82	0.79	0.75		
光源形式 CE402NA-J14	5	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.90	0.87	0.85	0.87	0.85	0.83	0.79		
器具光束 2,750 lm	7	1.01	0.99	0.96	1.00	0.97	0.94	0.92	0.94	0.92	0.90	0.91	0.89	0.87	0.83		
	10	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.92	0.91	0.87		

器具効率 Ft= 100%					
上方光束 Fu= 4.4%					
下方光束 Fd= 95.6%					
最大取付間隔					
A-A		1.30 H			
B-B		1.28 H			
保守率	良	0.88			
	中	0.86			
	否	0.81			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	308	308	308		
10	303	303	303		
20	289	287	288		
30	267	263	264		
40	236	229	234		
50	197	185	192		
60	155	140	149		
70	111	89	101		
80	69	32	55		
90	39	1	25		
100	22		13		
110	13		8		
120	11		7		
130	8		6		
140	6		3		
150	3				
160	3				
170					
180					

単体照度分布(初期値)

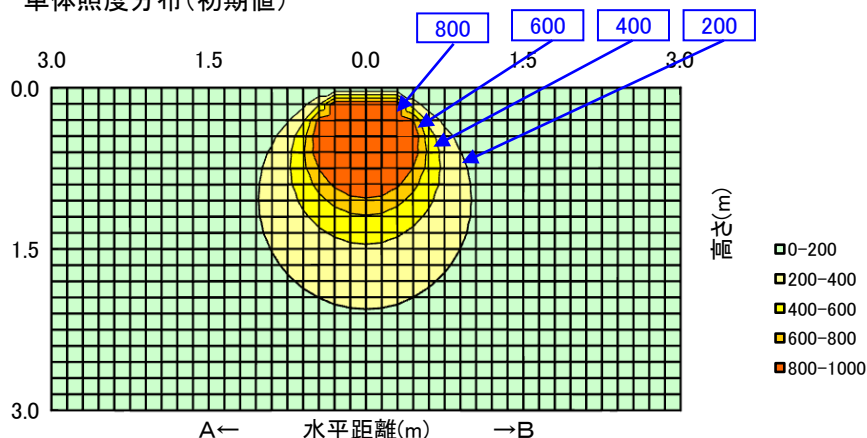

配光曲線
(cd/1000 lm)

