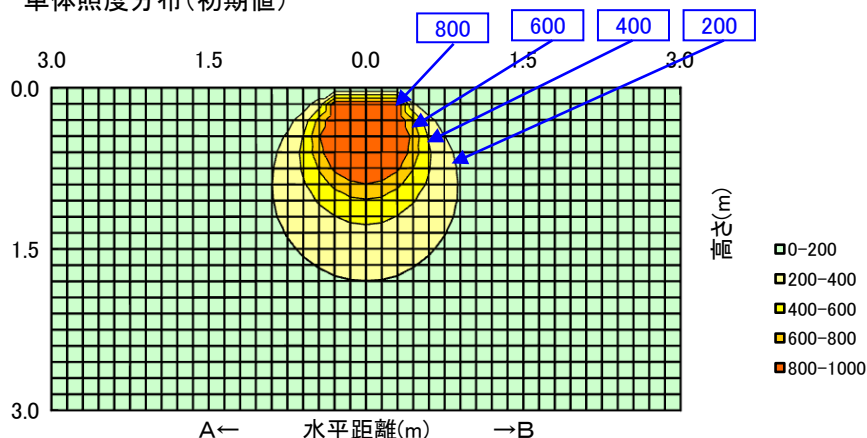
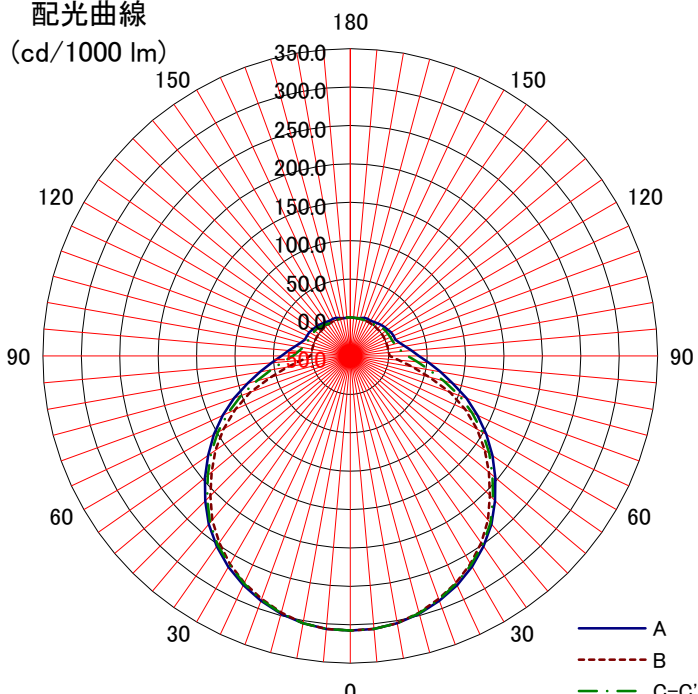


日立照明器具 照明特性

名称: 交換形LEDトラフ形	天井	80%			70%				50%			30%			0%					
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
																	床			
形式: PC4A	反射率	10%																0%		
<備考>	室指数	固有照明率 S/H=1.0																		
	0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.41	0.34	0.30	0.28					
姿図 	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.51	0.44	0.39	0.50	0.44	0.39	0.36					
	1	0.72	0.61	0.53	0.70	0.60	0.52	0.47	0.58	0.51	0.46	0.56	0.50	0.45	0.43					
	1.25	0.78	0.68	0.60	0.76	0.67	0.59	0.54	0.64	0.58	0.53	0.62	0.57	0.52	0.49					
	1.5	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.69	0.63	0.59	0.67	0.62	0.58	0.55					
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.73	0.69	0.65	0.62					
	2.5	0.91	0.85	0.79	0.89	0.83	0.78	0.73	0.80	0.76	0.72	0.77	0.74	0.70	0.67					
	3	0.94	0.88	0.83	0.92	0.86	0.81	0.77	0.83	0.79	0.76	0.80	0.77	0.74	0.70					
光源形式	4	0.97	0.92	0.88	0.95	0.90	0.86	0.83	0.87	0.84	0.81	0.84	0.82	0.79	0.75					
CE402NB-J14	5	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.90	0.87	0.85	0.87	0.85	0.83	0.79					
器具光束	7	1.01	0.99	0.96	1.00	0.97	0.94	0.92	0.94	0.92	0.90	0.91	0.89	0.87	0.83					
2,100 lm	10	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.92	0.91	0.87					
器具効率 Ft= 100%		単体照度分布(初期値) 																		
上方光束 Fu= 4.4%																				
下方光束 Fd= 95.6%																				
最大取付間隔		A-A 1.30 H B-B 1.28 H																		
保守率	良	0.88																		
	中	0.86																		
	否	0.81																		
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 																		
	A-0																B-B	C-0	A'-0	C'-0
0	308																308	308		
10	303																303	303		
20	289																287	288		
30	267																263	264		
40	236																229	234		
50	197																185	192		
60	155																140	149		
70	111																89	101		
80	69																32	55		
90	39																1	25		
100	22																	13		
110	13																	8		
120	11																	7		
130	8																	6		
140	6																	3		
150	3																			
160	3																			
170																				
180																				