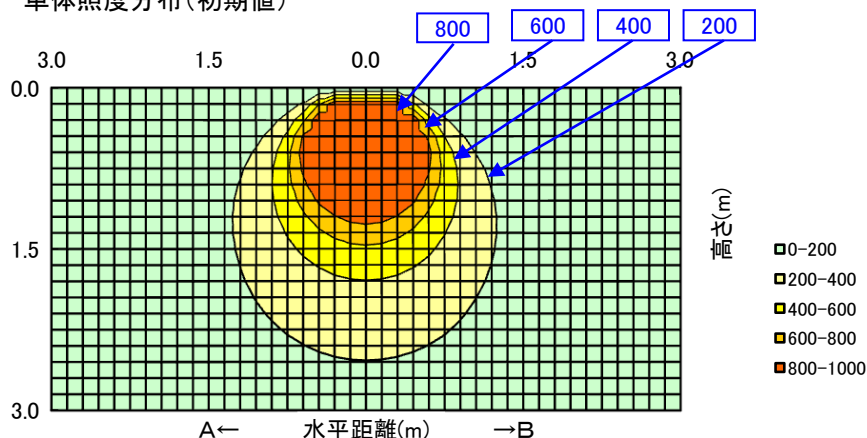
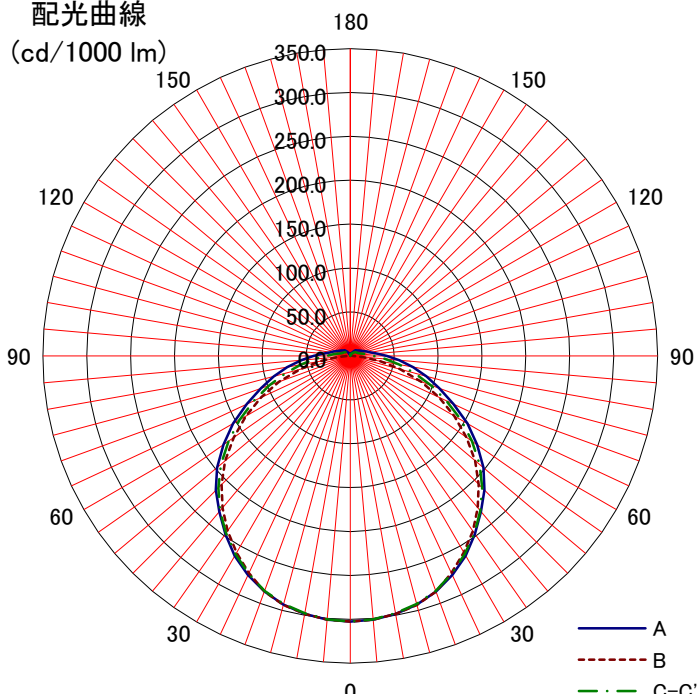


日立照明器具 照明特性

名称: 交換形LEDトラフ形	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%												
形式: PC4A	反射率	固有照明率 S/H=1.0														
<備考>	室指数															
		0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.40	0.34	0.30	0.27
姿図 		0.8	0.66	0.54	0.46	0.64	0.53	0.45	0.40	0.51	0.44	0.39	0.49	0.43	0.39	0.36
	1	0.72	0.61	0.53	0.70	0.60	0.52	0.47	0.57	0.51	0.46	0.55	0.50	0.45	0.42	
	1.25	0.78	0.68	0.60	0.76	0.66	0.59	0.54	0.64	0.58	0.53	0.61	0.56	0.52	0.49	
	1.5	0.82	0.73	0.66	0.80	0.71	0.65	0.59	0.69	0.63	0.58	0.66	0.61	0.57	0.54	
	2	0.88	0.80	0.74	0.86	0.78	0.73	0.68	0.76	0.70	0.66	0.73	0.68	0.65	0.61	
	2.5	0.91	0.84	0.79	0.89	0.83	0.77	0.73	0.80	0.75	0.71	0.77	0.73	0.70	0.66	
	3	0.93	0.87	0.82	0.91	0.86	0.81	0.77	0.83	0.79	0.75	0.80	0.76	0.73	0.69	
光源形式	4	0.97	0.92	0.87	0.95	0.90	0.86	0.82	0.87	0.83	0.80	0.84	0.81	0.78	0.74	
CE404NA-J14	5	0.99	0.95	0.91	0.97	0.93	0.90	0.86	0.90	0.87	0.84	0.87	0.84	0.82	0.78	
器具光束	7	1.01	0.98	0.95	0.99	0.97	0.94	0.92	0.93	0.91	0.89	0.90	0.88	0.87	0.82	
4,250 lm	10	1.03	1.01	0.99	1.01	0.99	0.98	0.96	0.96	0.95	0.93	0.93	0.92	0.90	0.86	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 5.2%																
下方光束 Fd= 94.8%																
最大取付間隔																
A-A 1.30 H																
B-B 1.28 H																
保守率	良	0.88	配光曲線 (cd/1000 lm) 													
	中	0.86														
	否	0.81														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	303	303	303													
10	298	298	298													
20	286	286	285													
30	263	259	261													
40	232	226	230													
50	198	186	192													
60	154	137	146													
70	108	86	98													
80	73	35	57													
90	42	3	27													
100	23	1	14													
110	16	1	9													
120	12		8													
130	10		6													
140	8		4													
150	4		3													
160	3		1													
170	3		2													
180																