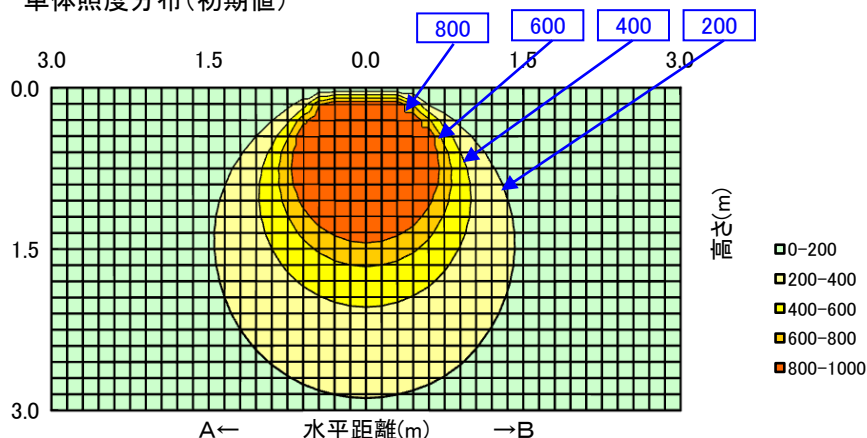
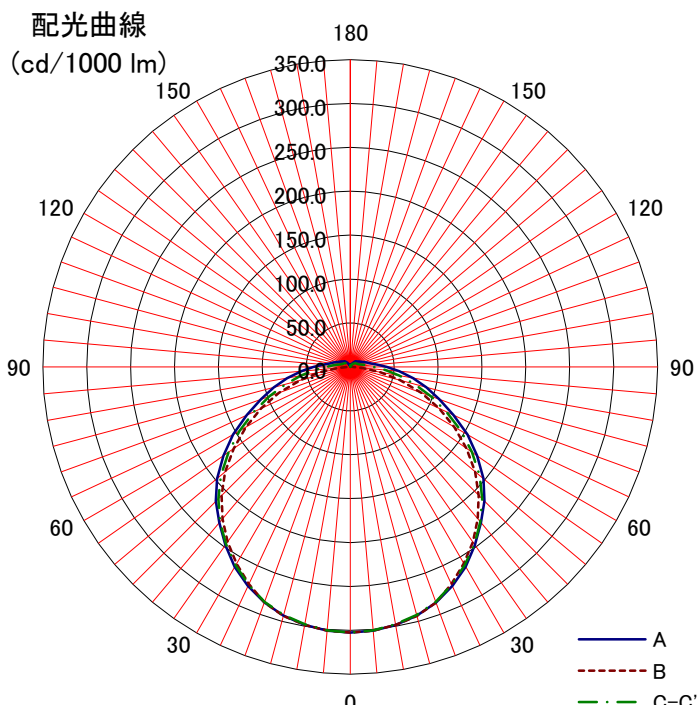


日立照明器具 照明特性

名称: 交換形LEDトラフ形	天井	80%			70%				50%			30%			0%		
		反射率	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
形式: PC4A	室指数	固有照明率 S/H=1.0															
<備考>	0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.40	0.34	0.30	0.27		
	0.8	0.66	0.54	0.46	0.64	0.53	0.45	0.40	0.51	0.44	0.39	0.49	0.43	0.39	0.36		
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.52	0.47	0.57	0.51	0.46	0.55	0.50	0.45	0.42		
	1.25	0.78	0.68	0.60	0.76	0.66	0.59	0.54	0.64	0.58	0.53	0.61	0.56	0.52	0.49		
	1.5	0.82	0.73	0.66	0.80	0.71	0.65	0.59	0.69	0.63	0.58	0.66	0.61	0.57	0.54		
	2	0.88	0.80	0.74	0.86	0.78	0.73	0.68	0.76	0.70	0.66	0.73	0.68	0.65	0.61		
	2.5	0.91	0.84	0.79	0.89	0.83	0.77	0.73	0.80	0.75	0.71	0.77	0.73	0.70	0.66		
	3	0.93	0.87	0.82	0.91	0.86	0.81	0.77	0.83	0.79	0.75	0.80	0.76	0.73	0.69		
	4	0.97	0.92	0.87	0.95	0.90	0.86	0.82	0.87	0.83	0.80	0.84	0.81	0.78	0.74		
光源形式	5	0.99	0.95	0.91	0.97	0.93	0.90	0.86	0.90	0.87	0.84	0.87	0.84	0.82	0.78		
器具光束	7	1.01	0.98	0.95	0.99	0.97	0.94	0.92	0.93	0.91	0.89	0.90	0.88	0.87	0.82		
5,500 lm	10	1.03	1.01	0.99	1.01	0.99	0.98	0.96	0.96	0.95	0.93	0.93	0.92	0.90	0.86		
器具効率 Ft= 100%		単体照度分布 (初期値) 															
上方光束 Fu= 5.2%																	
下方光束 Fd= 94.8%																	
最大取付間隔		配光曲線 															
A-A 1.30 H																	
B-B 1.28 H																	
保守率	良	0.88	A B C-C'														
	中	0.86															
	否	0.81															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	303	303	303														
10	298	298	298														
20	286	286	285														
30	263	259	261														
40	232	226	230														
50	198	186	192														
60	154	137	146														
70	108	86	98														
80	73	35	57														
90	42	3	27														
100	23	1	14														
110	16	1	9														
120	12		8														
130	10		6														
140	8		4														
150	4		3														
160	3		1														
170	3		2														
180																	