

日立照明器具 照明特性


名称: 交換形LEDト77形	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: PC4A	室指数	固有照明率 S/H=1.0														
＜備考＞	0.6	0.57	0.45	0.37	0.55	0.44	0.37	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28	
	0.8	0.66	0.54	0.47	0.64	0.53	0.46	0.41	0.52	0.45	0.40	0.50	0.44	0.39	0.37	
姿図 	1	0.72	0.61	0.54	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.50	0.46	0.43	
	1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.64	0.58	0.53	0.62	0.57	0.52	0.49	
	1.5	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.69	0.64	0.59	0.67	0.62	0.58	0.55	
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.73	0.69	0.65	0.62	
	2.5	0.91	0.85	0.79	0.89	0.83	0.78	0.73	0.80	0.76	0.72	0.77	0.73	0.70	0.66	
	3	0.94	0.88	0.83	0.91	0.86	0.81	0.77	0.83	0.79	0.75	0.80	0.77	0.74	0.70	
	4	0.97	0.92	0.88	0.95	0.90	0.86	0.83	0.87	0.84	0.81	0.84	0.81	0.79	0.75	
光源形式 CE407NB-JX14	5	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.90	0.87	0.84	0.87	0.84	0.82	0.78	
器具光束	7	1.01	0.98	0.96	0.99	0.97	0.94	0.92	0.93	0.91	0.89	0.90	0.88	0.87	0.83	
7,200 lm	10	1.03	1.01	0.99	1.01	0.99	0.98	0.96	0.96	0.95	0.93	0.93	0.92	0.91	0.86	

器具効率 Ft=	100%
上方光束 Fu=	5.2%
下方光束 Fd=	94.8%

最大取付間隔		
A-A	1.26	H
B-B	1.22	H
保守率	良	0.88
	中	0.86
	否	0.81

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	321	321	321		
10	313	313	315		
20	297	294	296		
30	271	262	267		
40	238	223	231		
50	198	178	188		
60	154	126	141		
70	111	74	98		
80	75	27	57		
90	46	2	29		
100	25	1	14		
110	17	1	9		
120	12	1	7		
130	9	1	6		
140	6	1	3		
150	3	1	2		
160	2	1	1		
170	2	1	2		
180					

単体照度分布 (初期値)

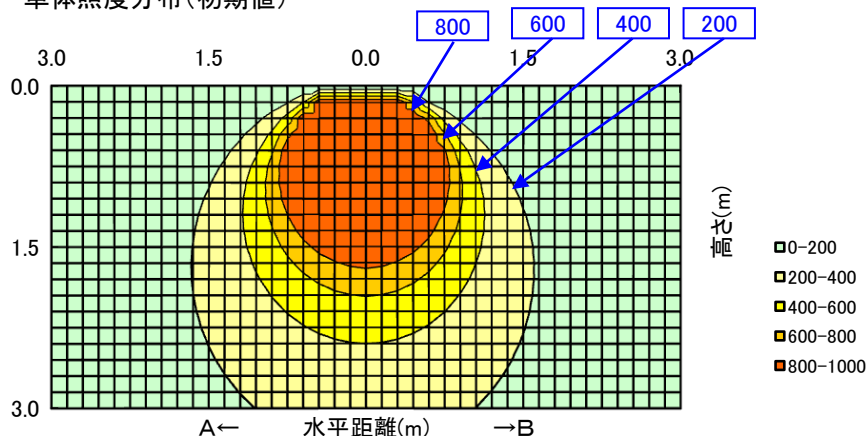

配光曲線
(cd/1000 lm)

