

日立照明器具 照明特性


名称: 交換形LEDトラフ形	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: PC4ACP	室指数	固有照明率 S/H=1.0														
<備考> キャビースイッチ付	0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.40	0.34	0.30	0.27	
	0.8	0.66	0.54	0.46	0.64	0.53	0.45	0.40	0.51	0.44	0.39	0.49	0.43	0.39	0.36	
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.52	0.47	0.57	0.51	0.46	0.55	0.50	0.45	0.42	
	1.25	0.78	0.68	0.60	0.76	0.66	0.59	0.54	0.64	0.58	0.53	0.61	0.56	0.52	0.49	
	1.5	0.82	0.73	0.66	0.80	0.71	0.65	0.59	0.69	0.63	0.58	0.66	0.61	0.57	0.54	
	2	0.88	0.80	0.74	0.86	0.78	0.73	0.68	0.76	0.70	0.66	0.73	0.68	0.65	0.61	
	2.5	0.91	0.84	0.79	0.89	0.83	0.77	0.73	0.80	0.75	0.71	0.77	0.73	0.70	0.66	
	3	0.93	0.87	0.82	0.91	0.86	0.81	0.77	0.83	0.79	0.75	0.80	0.76	0.73	0.69	
	4	0.97	0.92	0.87	0.95	0.90	0.86	0.82	0.87	0.83	0.80	0.84	0.81	0.78	0.74	
光源形式	5	0.99	0.95	0.91	0.97	0.93	0.90	0.86	0.90	0.87	0.84	0.87	0.84	0.82	0.78	
器具光束	7	1.01	0.98	0.95	0.99	0.97	0.94	0.92	0.93	0.91	0.89	0.90	0.88	0.87	0.82	
4,250 lm	10	1.03	1.01	0.99	1.01	0.99	0.98	0.96	0.96	0.95	0.93	0.93	0.92	0.90	0.86	

器具効率 F_t = 100%
 上方光束 F_u = 5.2%
 下方光束 F_d = 94.8%

最大取付間隔		
A-A	1.30	H
B-B	1.28	H
保守率	良	0.88
	中	0.86
	否	0.81

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	303	303	303		
10	298	298	298		
20	286	286	285		
30	263	259	261		
40	232	226	230		
50	198	186	192		
60	154	137	146		
70	108	86	98		
80	73	35	57		
90	42	3	27		
100	23	1	14		
110	16	1	9		
120	12		8		
130	10		6		
140	8		4		
150	4		3		
160	3		1		
170	3		2		
180					

単体照度分布 (初期値)

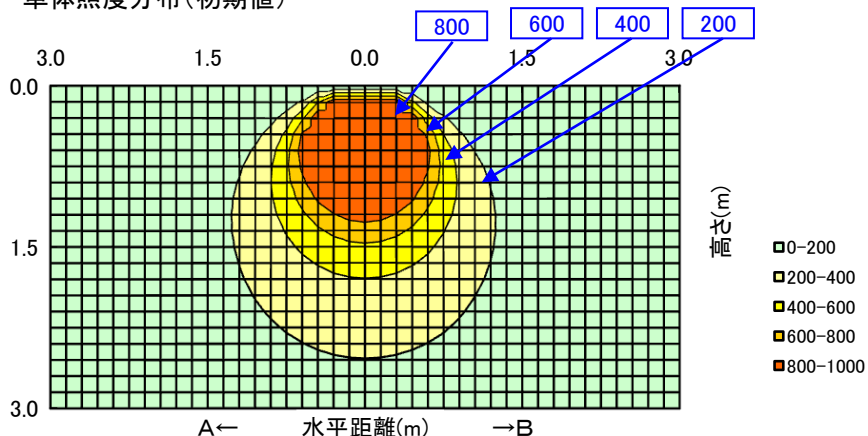

配光曲線
(cd/1000 lm)

