
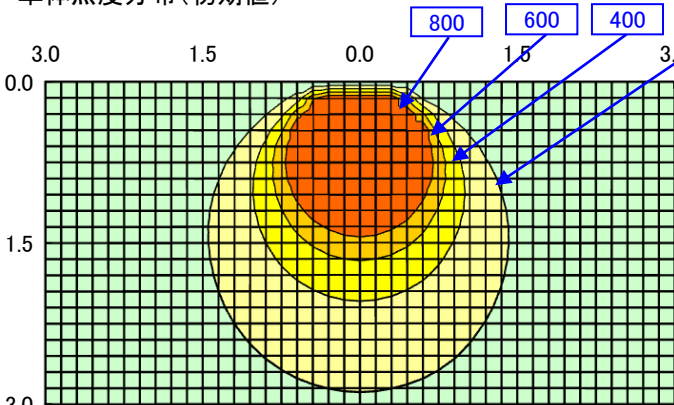
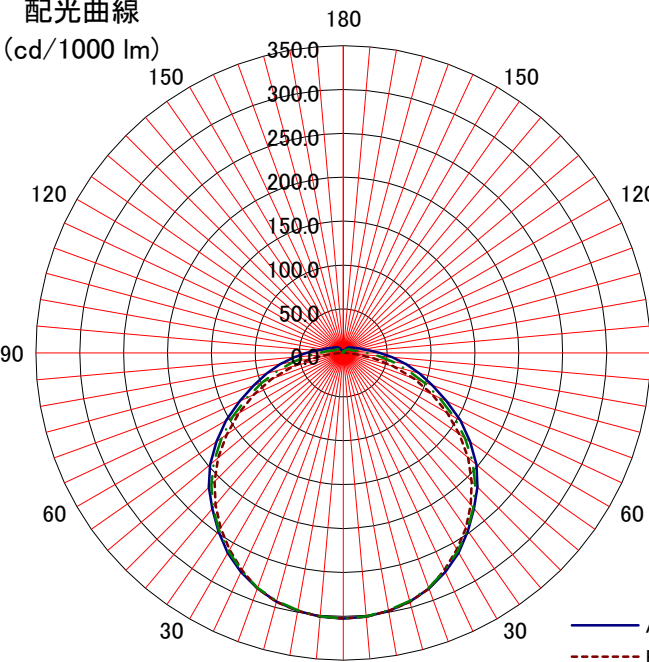


日立照明器具 照明特性

名称: 交換形LEDトラフ形	天井 反射率 壁 床	80%			70%				50%			30%			0%																																																																																																																										
		70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																										
		10%														0%																																																																																																																									
形式: PC4ACP	室指数	固有照明率 S/H=1.0																																																																																																																																							
<備考> キャパシタ付	0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.40	0.34	0.30	0.27																																																																																																																										
	0.8	0.66	0.54	0.46	0.64	0.53	0.45	0.40	0.51	0.44	0.39	0.49	0.43	0.39	0.36																																																																																																																										
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.52	0.47	0.57	0.51	0.46	0.55	0.50	0.45	0.42																																																																																																																										
	1.25	0.78	0.68	0.60	0.76	0.66	0.59	0.54	0.64	0.58	0.53	0.61	0.56	0.52	0.49																																																																																																																										
	1.5	0.82	0.73	0.66	0.80	0.71	0.65	0.59	0.69	0.63	0.58	0.66	0.61	0.57	0.54																																																																																																																										
	2	0.88	0.80	0.74	0.86	0.78	0.73	0.68	0.76	0.70	0.66	0.73	0.68	0.65	0.61																																																																																																																										
	2.5	0.91	0.84	0.79	0.89	0.83	0.77	0.73	0.80	0.75	0.71	0.77	0.73	0.70	0.66																																																																																																																										
	3	0.93	0.87	0.82	0.91	0.86	0.81	0.77	0.83	0.79	0.75	0.80	0.76	0.73	0.69																																																																																																																										
	4	0.97	0.92	0.87	0.95	0.90	0.86	0.82	0.87	0.83	0.80	0.84	0.81	0.78	0.74																																																																																																																										
光源形式 CE405NA-J14	5	0.99	0.95	0.91	0.97	0.93	0.90	0.86	0.90	0.87	0.84	0.87	0.84	0.82	0.78																																																																																																																										
器具光束 5,500 lm	7	1.01	0.98	0.95	0.99	0.97	0.94	0.92	0.93	0.91	0.89	0.90	0.88	0.87	0.82																																																																																																																										
	10	1.03	1.01	0.99	1.01	0.99	0.98	0.96	0.96	0.95	0.93	0.93	0.92	0.90	0.86																																																																																																																										
器具効率 Ft= 100%		単体照度分布(初期値)  800 600 400 200 3.0 1.5 0.0 1.5 3.0 0.0 1.5 3.0 A← 水平距離(m) →B (m) 縦 0-200 200-400 400-600 600-800 800-1000																																																																																																																																							
上方光束 Fu= 5.2%																																																																																																																																									
下方光束 Fd= 94.8%																																																																																																																																									
最大取付間隔		配光曲線 (cd/1000 lm)  180 150 120 90 60 30 0 350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0 A B C-C'																																																																																																																																							
A-A 1.30 H																																																																																																																																									
B-B 1.28 H																																																																																																																																									
保守率	良	0.88	光度 (cd/1000 lm) <table><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>303</td><td>303</td><td>303</td><td></td><td></td></tr><tr><td>10</td><td>298</td><td>298</td><td>298</td><td></td><td></td></tr><tr><td>20</td><td>286</td><td>286</td><td>285</td><td></td><td></td></tr><tr><td>30</td><td>263</td><td>259</td><td>261</td><td></td><td></td></tr><tr><td>40</td><td>232</td><td>226</td><td>230</td><td></td><td></td></tr><tr><td>50</td><td>198</td><td>186</td><td>192</td><td></td><td></td></tr><tr><td>60</td><td>154</td><td>137</td><td>146</td><td></td><td></td></tr><tr><td>70</td><td>108</td><td>86</td><td>98</td><td></td><td></td></tr><tr><td>80</td><td>73</td><td>35</td><td>57</td><td></td><td></td></tr><tr><td>90</td><td>42</td><td>3</td><td>27</td><td></td><td></td></tr><tr><td>100</td><td>23</td><td>1</td><td>14</td><td></td><td></td></tr><tr><td>110</td><td>16</td><td>1</td><td>9</td><td></td><td></td></tr><tr><td>120</td><td>12</td><td></td><td>8</td><td></td><td></td></tr><tr><td>130</td><td>10</td><td></td><td>6</td><td></td><td></td></tr><tr><td>140</td><td>8</td><td></td><td>4</td><td></td><td></td></tr><tr><td>150</td><td>4</td><td></td><td>3</td><td></td><td></td></tr><tr><td>160</td><td>3</td><td></td><td>1</td><td></td><td></td></tr><tr><td>170</td><td>3</td><td></td><td>2</td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>																A-0	B-B	C-0	A'-0	C'-0	0	303	303	303			10	298	298	298			20	286	286	285			30	263	259	261			40	232	226	230			50	198	186	192			60	154	137	146			70	108	86	98			80	73	35	57			90	42	3	27			100	23	1	14			110	16	1	9			120	12		8			130	10		6			140	8		4			150	4		3			160	3		1			170	3		2			180					
		A-0																B-B	C-0	A'-0	C'-0																																																																																																																				
	0	303																303	303																																																																																																																						
10	298	298	298																																																																																																																																						
20	286	286	285																																																																																																																																						
30	263	259	261																																																																																																																																						
40	232	226	230																																																																																																																																						
50	198	186	192																																																																																																																																						
60	154	137	146																																																																																																																																						
70	108	86	98																																																																																																																																						
80	73	35	57																																																																																																																																						
90	42	3	27																																																																																																																																						
100	23	1	14																																																																																																																																						
110	16	1	9																																																																																																																																						
120	12		8																																																																																																																																						
130	10		6																																																																																																																																						
140	8		4																																																																																																																																						
150	4		3																																																																																																																																						
160	3		1																																																																																																																																						
170	3		2																																																																																																																																						
180																																																																																																																																									
中	0.86																																																																																																																																								
否	0.81																																																																																																																																								