

日立照明器具 照明特性

名称: 交換形LEDトラフ形	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: PC4ACP	室指数	固有照明率 S/H=1.0														
＜備考＞ キャパ [®] -スイッチ付	0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.30	0.28	
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.51	0.45	0.40	0.50	0.44	0.39	0.37	
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.51	0.46	0.56	0.50	0.46	0.43	
	1.25	0.78	0.68	0.60	0.76	0.67	0.60	0.54	0.64	0.58	0.53	0.62	0.56	0.52	0.49	
	1.5	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.69	0.63	0.59	0.67	0.62	0.57	0.54	
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.66	0.73	0.69	0.65	0.62	
	2.5	0.91	0.85	0.79	0.89	0.83	0.78	0.73	0.80	0.75	0.71	0.77	0.73	0.70	0.66	
	3	0.94	0.88	0.82	0.91	0.86	0.81	0.77	0.83	0.79	0.75	0.80	0.76	0.73	0.70	
	4	0.97	0.92	0.88	0.95	0.90	0.86	0.83	0.87	0.84	0.80	0.84	0.81	0.78	0.74	
光源形式 CE405NB-J14	5	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.90	0.87	0.84	0.87	0.84	0.82	0.78	
器具光束	7	1.01	0.98	0.96	0.99	0.97	0.94	0.92	0.93	0.91	0.89	0.90	0.88	0.87	0.82	
5,500 lm	10	1.03	1.01	0.99	1.01	0.99	0.98	0.96	0.96	0.95	0.93	0.93	0.92	0.90	0.86	

器具効率 Ft= 100%

上方光束 Fu= 5.3%

下方光束 Fd= 94.7%

最大取付間隔

A-A 1.28 H


B-B 1.24 H

保守率	良	0.88
	中	0.86
	否	0.81

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	319	319	319		
10	313	313	313		
20	296	292	294		
30	270	262	265		
40	238	222	230		
50	195	172	184		
60	155	128	143		
70	116	77	98		
80	77	28	57		
90	48	1	29		
100	28	1	14		
110	17	1	9		
120	12	1	7		
130	10	1	6		
140	6	1	3		
150	3	1	1		
160	3	1	1		
170	2	1	1		
180					

単体照度分布 (初期値)

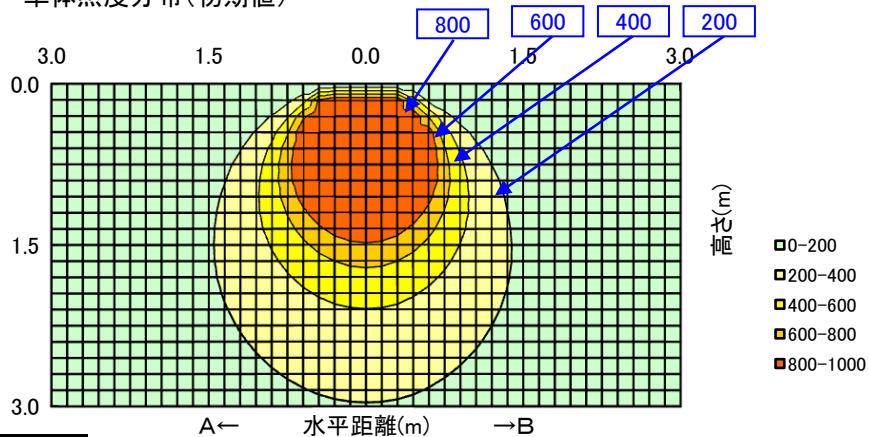

配光曲線

(cd/1000 lm)

