


日立照明器具 照明特性

名称: 交換形LEDトラフ形	天井	反射率	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													0%
形式: PC4ACP	室指数	固有照明率 S/H=1.0															
＜備考＞キャパシタ付		0.6	0.56	0.44	0.36	0.54	0.43	0.36	0.30	0.42	0.35	0.30	0.40	0.34	0.30	0.27	
姿図 	0.8	0.65	0.54	0.46	0.64	0.53	0.45	0.40	0.51	0.44	0.39	0.49	0.43	0.38	0.36		
	1	0.72	0.61	0.53	0.70	0.60	0.52	0.46	0.57	0.51	0.46	0.55	0.49	0.45	0.42		
	1.25	0.78	0.67	0.60	0.75	0.66	0.59	0.53	0.64	0.57	0.52	0.61	0.56	0.51	0.48		
	1.5	0.82	0.73	0.66	0.80	0.71	0.65	0.59	0.69	0.63	0.58	0.66	0.61	0.57	0.54		
	2	0.88	0.80	0.74	0.85	0.78	0.72	0.67	0.75	0.70	0.66	0.73	0.68	0.65	0.61		
	2.5	0.91	0.84	0.79	0.89	0.83	0.77	0.73	0.80	0.75	0.71	0.77	0.73	0.69	0.66		
	3	0.93	0.87	0.82	0.91	0.86	0.81	0.77	0.83	0.78	0.75	0.80	0.76	0.73	0.69		
光源形式	4	0.96	0.92	0.87	0.94	0.90	0.86	0.82	0.87	0.83	0.80	0.84	0.81	0.78	0.74		
CE407NB-JX14	5	0.99	0.94	0.91	0.97	0.93	0.89	0.86	0.89	0.87	0.84	0.86	0.84	0.82	0.78		
器具光束	7	1.01	0.98	0.95	0.99	0.96	0.94	0.91	0.93	0.91	0.89	0.90	0.88	0.86	0.82		
7,200 lm	10	1.03	1.01	0.99	1.01	0.99	0.97	0.96	0.96	0.94	0.93	0.93	0.91	0.90	0.86		


器具効率 Ft= 100%					
上方光束 Fu= 5.5%					
下方光束 Fd= 94.5%					
最大取付間隔					
A-A		1.30 H			
B-B		1.26 H			
保守率	良	0.88			
	中	0.86			
	否	0.81			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	302	302	302		
10	297	298	297		
20	286	283	283		
30	263	257	259		
40	234	223	228		
50	197	187	193		
60	153	137	146		
70	108	83	97		
80	73	35	57		
90	43	2	27		
100	23	1	14		
110	16	1	10		
120	12	1	9		
130	10	1	7		
140	8	1	4		
150	4	1	3		
160	3	1	2		
170	3	1	2		
180					

単体照度分布(初期値)

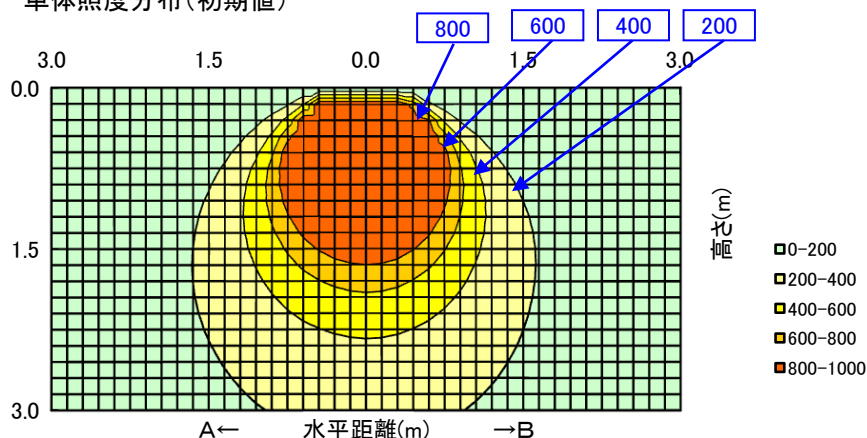

0-200
200-400
400-600
600-800
800-1000

配光曲線
(cd/1000 lm)

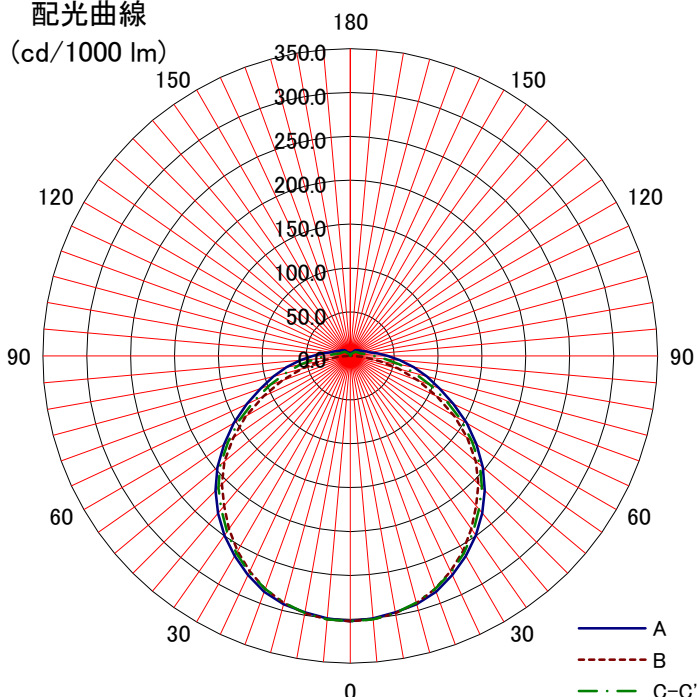

A
B
C-C'