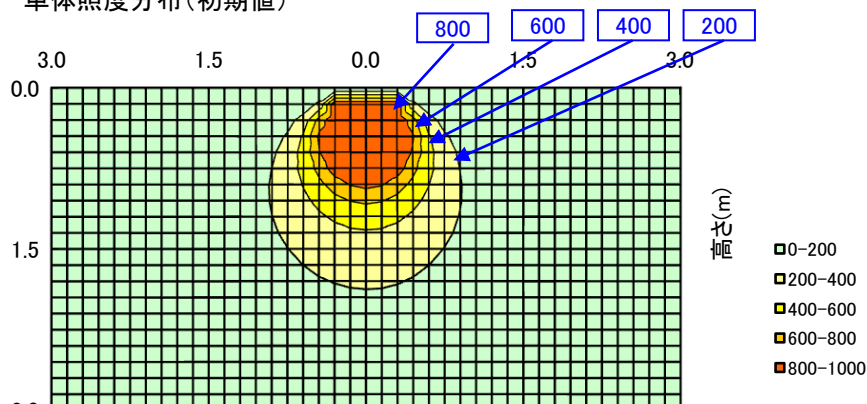
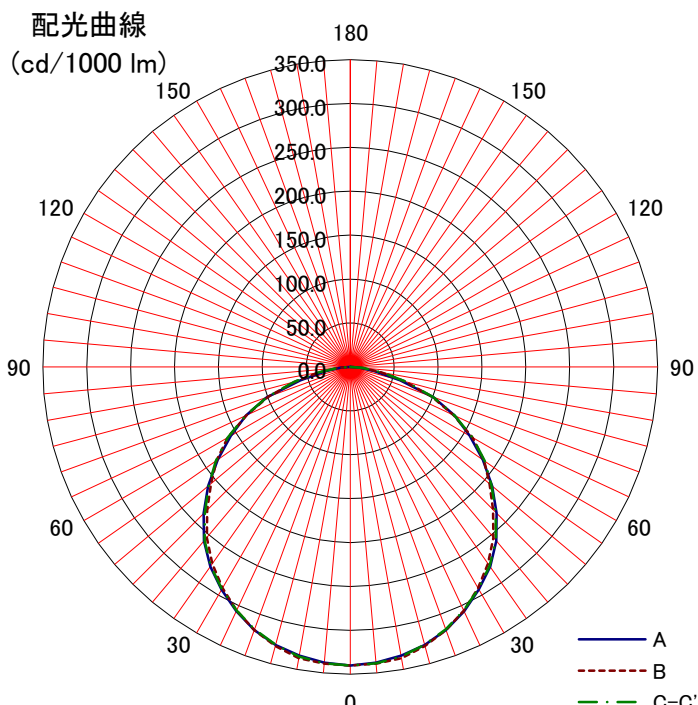
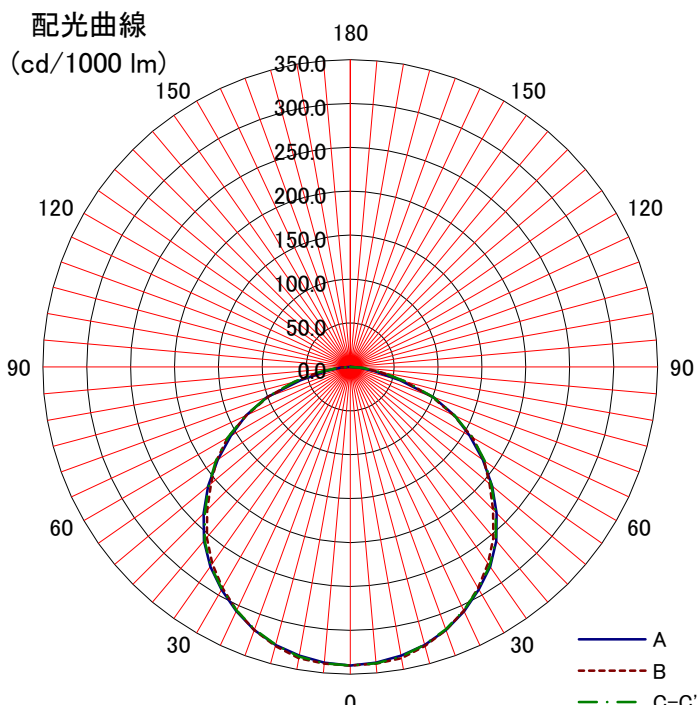


日立照明器具 照明特性

名称: 交換形LED笠付形	天井	80%			70%				50%			30%			0%																																																																																																																								
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																							
			床	10%														0%																																																																																																																					
形式: PC4B	室指数	固有照明率 S/H=1.0																																																																																																																																					
<備考>	0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31																																																																																																																								
	0.8	0.68	0.56	0.48	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40																																																																																																																								
姿図 	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.60	0.54	0.49	0.47																																																																																																																								
	1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54																																																																																																																								
	1.5	0.85	0.76	0.69	0.83	0.75	0.69	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60																																																																																																																								
	2	0.90	0.83	0.77	0.89	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.68																																																																																																																								
	2.5	0.94	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.79	0.75	0.73																																																																																																																								
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.76																																																																																																																								
	4	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.91	0.88	0.85	0.89	0.87	0.84	0.81																																																																																																																								
光源形式	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85																																																																																																																								
器具光束	7	1.03	1.01	0.98	1.02	1.00	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.89																																																																																																																								
2,060 lm	10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93																																																																																																																								
器具効率 Ft= 100%		単体照度分布(初期値) 																																																																																																																																					
上方光束 Fu= 0%																																																																																																																																							
下方光束 Fd= 100%																																																																																																																																							
最大取付間隔		光度 (cd/1000 lm) <table><thead><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr></thead><tbody><tr><td>0</td><td>340</td><td>340</td><td>340</td><td></td><td></td></tr><tr><td>10</td><td>334</td><td>337</td><td>335</td><td></td><td></td></tr><tr><td>20</td><td>319</td><td>319</td><td>318</td><td></td><td></td></tr><tr><td>30</td><td>293</td><td>291</td><td>292</td><td></td><td></td></tr><tr><td>40</td><td>259</td><td>254</td><td>258</td><td></td><td></td></tr><tr><td>50</td><td>211</td><td>207</td><td>210</td><td></td><td></td></tr><tr><td>60</td><td>157</td><td>161</td><td>161</td><td></td><td></td></tr><tr><td>70</td><td>101</td><td>99</td><td>101</td><td></td><td></td></tr><tr><td>80</td><td>28</td><td>36</td><td>38</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table> 配光曲線 (cd/1000 lm) 															A-0	B-B	C-0	A'-0	C'-0	0	340	340	340			10	334	337	335			20	319	319	318			30	293	291	292			40	259	254	258			50	211	207	210			60	157	161	161			70	101	99	101			80	28	36	38			90						100						110						120						130						140						150						160						170						180					
	A-0															B-B	C-0	A'-0	C'-0																																																																																																																				
0	340															340	340																																																																																																																						
10	334															337	335																																																																																																																						
20	319	319	318																																																																																																																																				
30	293	291	292																																																																																																																																				
40	259	254	258																																																																																																																																				
50	211	207	210																																																																																																																																				
60	157	161	161																																																																																																																																				
70	101	99	101																																																																																																																																				
80	28	36	38																																																																																																																																				
90																																																																																																																																							
100																																																																																																																																							
110																																																																																																																																							
120																																																																																																																																							
130																																																																																																																																							
140																																																																																																																																							
150																																																																																																																																							
160																																																																																																																																							
170																																																																																																																																							
180																																																																																																																																							
A-A	1.30	H																																																																																																																																					
B-B	1.28	H																																																																																																																																					
保守率	良	0.88	配光曲線 (cd/1000 lm) 																																																																																																																																				
中	0.86																																																																																																																																						
否	0.81																																																																																																																																						