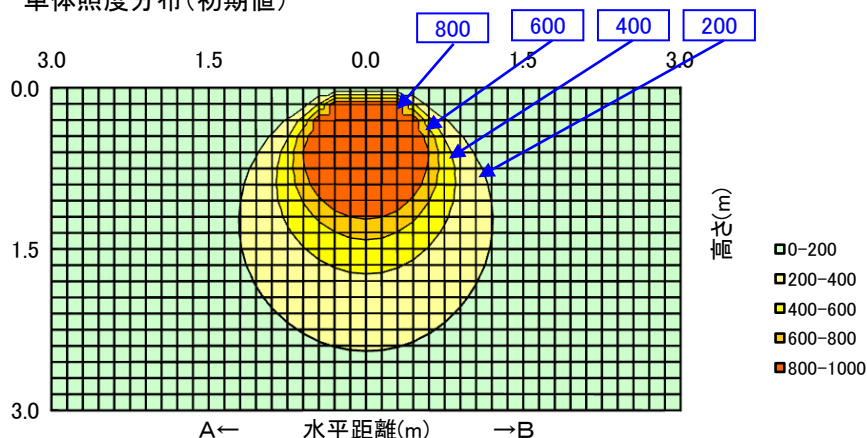
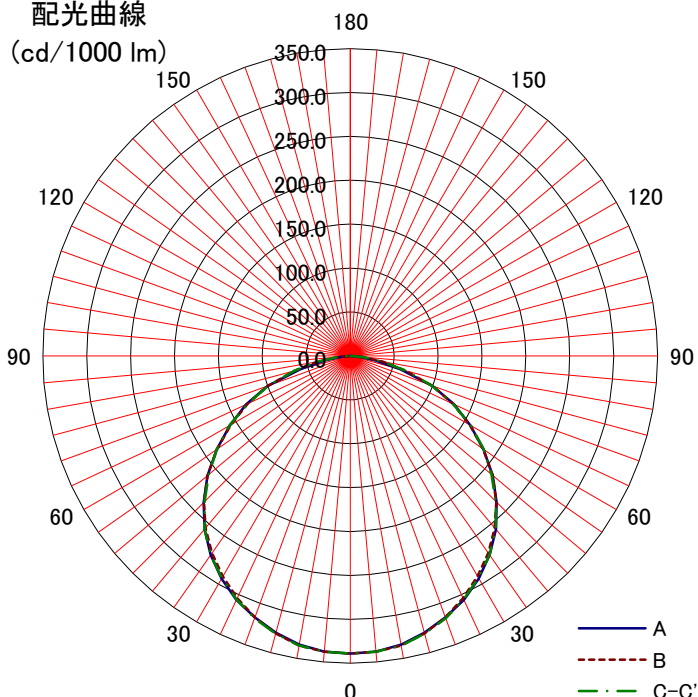


日立照明器具 照明特性

名称: 交換形LED笠付形	天井	80%			70%				50%			30%			0%																
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%															
			床	10%														0%													
形式: PC4B	室指数	固有照明率 S/H=1.0																													
＜備考＞	0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31																
	0.8	0.68	0.56	0.48	0.66	0.55	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40																
姿図 	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47																
	1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54																
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60																
	2	0.90	0.83	0.77	0.89	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.68																
	2.5	0.94	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.79	0.75	0.73																
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.76																
	4	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.91	0.88	0.85	0.89	0.86	0.84	0.81																
光源形式	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85																
器具光束	7	1.03	1.01	0.98	1.02	1.00	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.89																
3,530 lm	10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93																
器具効率 Ft= 100%		単体照度分布(初期値) 																													
上方光束 Fu= 0%																															
下方光束 Fd= 100%																															
最大取付間隔																															
A-A 1.30 H																															
B-B 1.28 H																															
保守率	良	0.88	配光曲線 (cd/1000 lm) 																												
	中	0.86																													
	否	0.81																													
光度 (cd/1000 lm)																															
	A-0	B-B															C-0	A'-0	C'-0												
0	339	339															339														
10	334	335	335																												
20	317	317	318																												
30	293	290	292																												
40	258	256	258																												
50	212	212	210																												
60	158	157	159																												
70	100	100	99																												
80	29	38	38																												
90		1	1																												
100																															
110																															
120																															
130																															
140																															
150																															
160																															
170																															
180																															