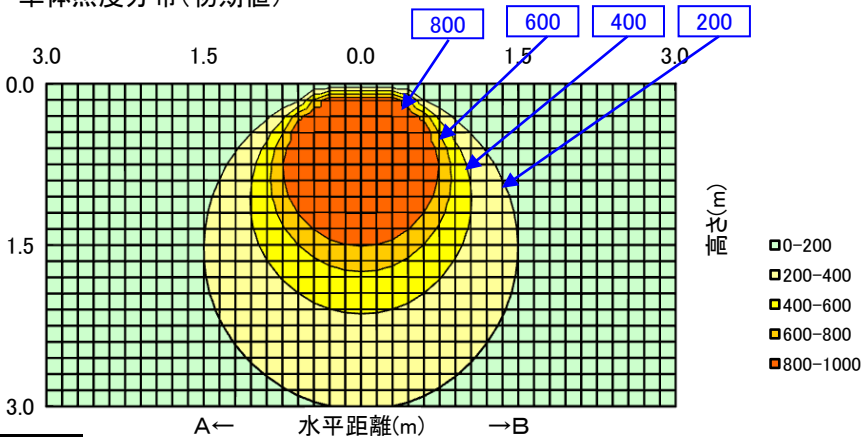
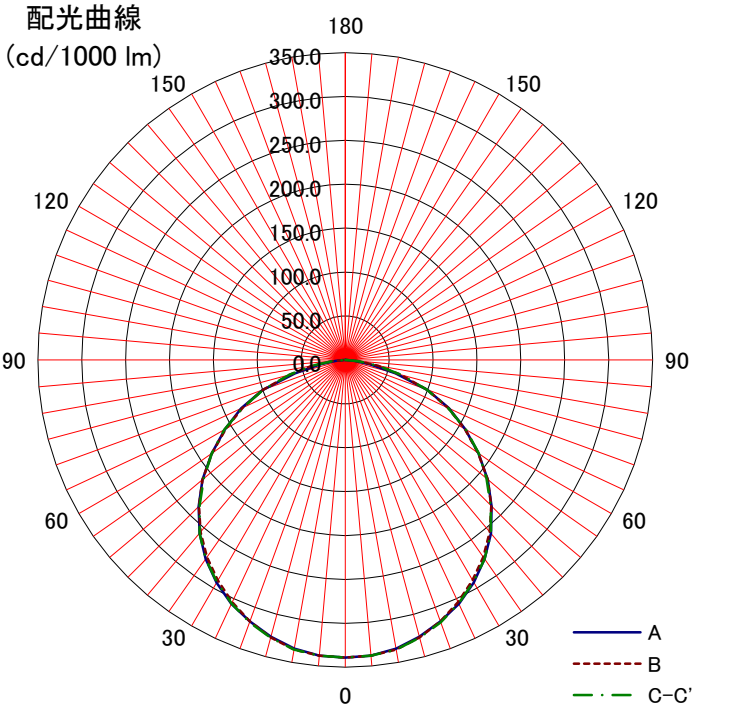


日立照明器具 照明特性

名称: 交換形LED笠付形	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%												
形式: PC4B	室指数	固有照明率 S/H=1.0														
＜備考＞	0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31	
	0.8	0.68	0.56	0.48	0.66	0.55	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40	
姿図	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47	
	1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54	
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60	
	2	0.90	0.83	0.77	0.89	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.68	
	2.5	0.94	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.79	0.75	0.73	
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.76	
	4	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.91	0.88	0.85	0.89	0.86	0.84	0.81	
光源形式	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85	
器具光束	7	1.03	1.01	0.98	1.02	1.00	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.89	
5,400 lm	10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔		配光曲線 														
A-A 1.30 H																
B-B 1.28 H																
保守率	良															0.88
	中															0.86
	否	0.81														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	339	339	339													
10	334	335	335													
20	317	317	318													
30	293	290	292													
40	258	256	258													
50	212	212	210													
60	158	157	159													
70	100	100	99													
80	29	38	38													
90		1	1													
100																
110																
120																
130																
140																
150																
160																
170																
180																