


日立照明器具 照明特性

名称: 交換形LED笠付形	天井 反射率	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
形式: PC4B	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.58	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.38	0.33	0.44	0.38	0.33	0.31	
	0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.43	0.55	0.48	0.43	0.53	0.47	0.43	0.41	
姿図 	1	0.74	0.64	0.56	0.73	0.63	0.56	0.50	0.61	0.55	0.50	0.60	0.54	0.50	0.48	
	1.25	0.80	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.57	0.66	0.61	0.57	0.55	
	1.5	0.85	0.76	0.69	0.83	0.75	0.69	0.64	0.73	0.68	0.63	0.71	0.67	0.63	0.60	
	2	0.90	0.83	0.77	0.89	0.82	0.77	0.72	0.80	0.75	0.71	0.78	0.74	0.71	0.68	
	2.5	0.94	0.88	0.82	0.92	0.86	0.82	0.77	0.84	0.80	0.76	0.82	0.79	0.76	0.73	
	3	0.96	0.91	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.77	
	4	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.91	0.88	0.85	0.89	0.87	0.84	0.81	
光源形式 CE405NB-J14	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85	
器具光束	7	1.03	1.01	0.98	1.02	1.00	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.89	
5,400 lm	10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93	

器具効率 Ft= 100%					
上方光束 Fu= 0%					
下方光束 Fd= 100%					
最大取付間隔					
A-A 1.26 H					
B-B 1.24 H					
保守率	良	0.88			
	中	0.86			
	否	0.81			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	355	355	355		
10	349	349	349		
20	330	327	330		
30	301	292	293		
40	263	251	255		
50	217	197	206		
60	163	144	157		
70	101	85	98		
80	36	33	41		
90		2	1		
100					
110					
120					
130					
140					
150					
160					
170					
180					


単体照度分布(初期値)

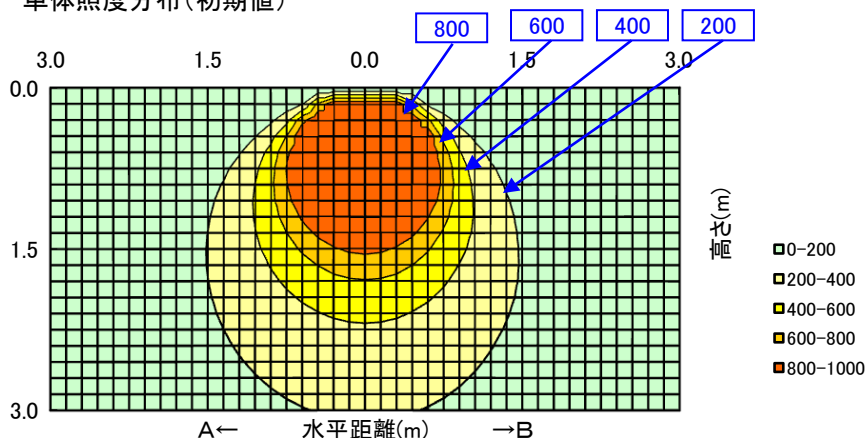

単位: 照度 (lx)

- 0-200
- 200-400
- 400-600
- 600-800
- 800-1000

配光曲線 (cd/1000 lm)

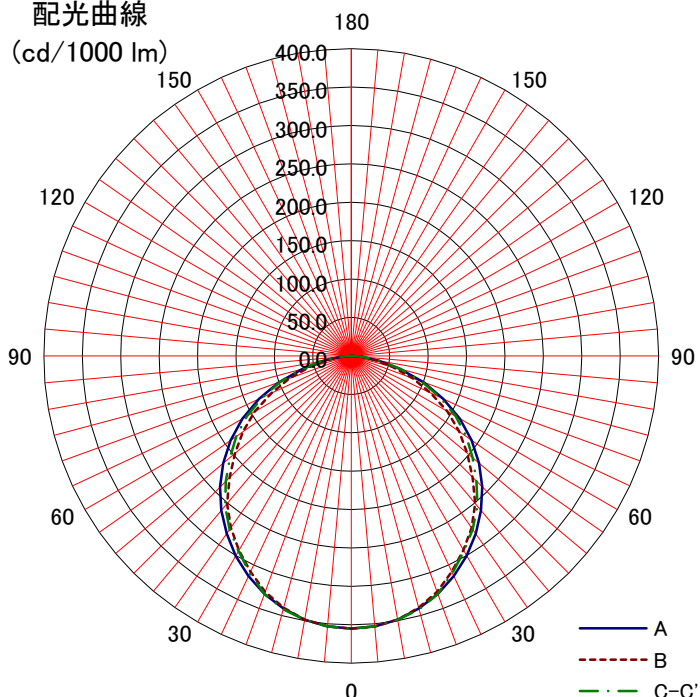

単位: 配光曲線 (cd/1000 lm)

- A
- B
- C-C'