


日立照明器具 照明特性

名称: 交換形LED笠付形	天井	反射率	80%			70%				50%			30%			0%			
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
				床	10%														0%
					固有照明率 S/H=1.0														
形式: PC4B		室指数																	
<備考>		0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.37	0.33	0.43	0.37	0.32	0.31			
		0.8	0.68	0.56	0.48	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40			
姿図 		1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.60	0.54	0.49	0.47			
		1.25	0.80	0.70	0.63	0.79	0.70	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54			
		1.5	0.85	0.76	0.69	0.83	0.75	0.69	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60			
		2	0.90	0.83	0.77	0.89	0.82	0.77	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.68			
		2.5	0.94	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.79	0.75	0.73			
		3	0.96	0.91	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.76			
		4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.91	0.88	0.85	0.89	0.87	0.84	0.81			
光源形式		5	1.01	0.97	0.94	1.00	0.96	0.93	0.91	0.94	0.91	0.89	0.92	0.90	0.88	0.85			
CE407NA-JX14		7	1.03	1.01	0.98	1.02	1.00	0.97	0.95	0.97	0.96	0.94	0.95	0.94	0.92	0.89			
器具光束		10	1.05	1.04	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93			
7,060 lm																			

器具効率 Ft= 100%					
上方光束 Fu= 0%					
下方光束 Fd= 100%					
最大取付間隔					
A-A		1.30 H			
B-B		1.28 H			
保守率	良	0.88			
	中	0.86			
	否	0.81			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	338	338	338		
10	332	333	333		
20	317	316	317		
30	293	292	292		
40	258	254	257		
50	216	211	213		
60	160	156	159		
70	103	95	99		
80	33	37	39		
90		2	1		
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期値)

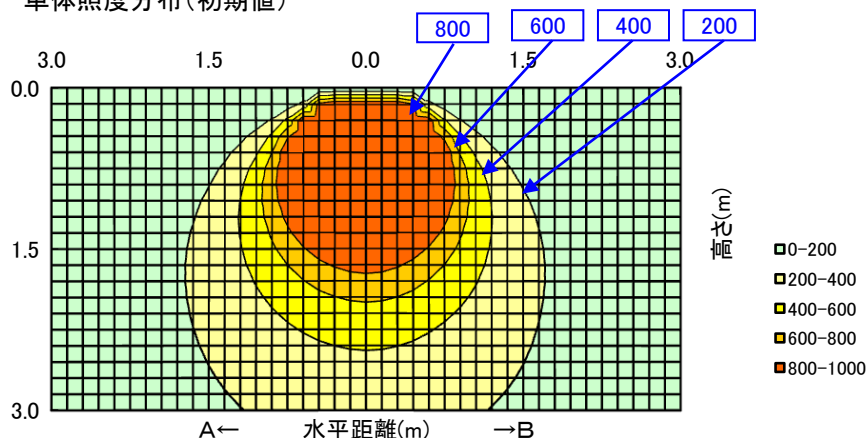


0.0 1.5 3.0 3.0 1.5 0.0

800 600 400 200

0-200
200-400
400-600
600-800
800-1000

A← 水平距離(m) →B

配光曲線
(cd/1000 lm)

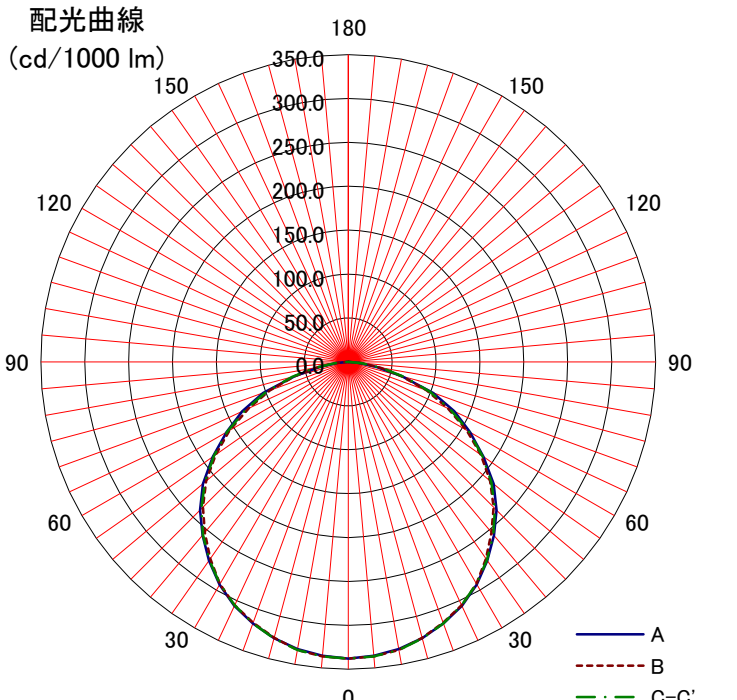

180 150 120 90 60 30 0

350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0

A
B
C-C'