


日立照明器具 照明特性


名称: 交換形LEDトラフ形	天井	反射率	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
形式: PC4B		室指数	固有照明率 S/H=1.0														
<備考>		0.6	0.58	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.38	0.33	0.44	0.38	0.33	0.31	
		0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.43	0.55	0.48	0.43	0.53	0.47	0.43	0.41	
姿図 		1	0.74	0.64	0.56	0.73	0.63	0.56	0.50	0.61	0.55	0.50	0.60	0.54	0.50	0.48	
		1.25	0.80	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.57	0.66	0.61	0.57	0.55	
		1.5	0.85	0.76	0.69	0.83	0.75	0.69	0.64	0.73	0.68	0.63	0.71	0.67	0.63	0.60	
		2	0.90	0.83	0.77	0.89	0.82	0.77	0.72	0.80	0.75	0.71	0.78	0.74	0.71	0.68	
		2.5	0.94	0.88	0.82	0.92	0.86	0.82	0.77	0.84	0.80	0.77	0.82	0.79	0.76	0.73	
		3	0.96	0.91	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.77	
		4	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.91	0.88	0.85	0.89	0.87	0.84	0.81	
光源形式		5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85	
CE407NB-JX14		7	1.03	1.01	0.98	1.02	1.00	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.89	
器具光束		10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93	
7,060 lm																	

器具効率 Ft= 100%					
上方光束 Fu= 0%					
下方光束 Fd= 100%					
最大取付間隔					
A-A		1.26 H			
B-B		1.24 H			
保守率	良	0.88			
	中	0.86			
	否	0.81			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	355	355	355		
10	348	348	348		
20	330	327	328		
30	300	293	296		
40	261	250	256		
50	213	201	205		
60	162	143	157		
70	105	90	98		
80	30	32	40		
90		2	2		
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期値)

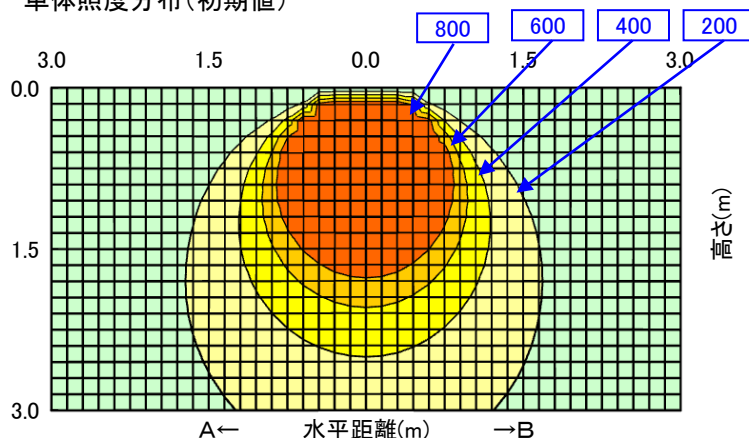

配光曲線 (cd/1000 lm)

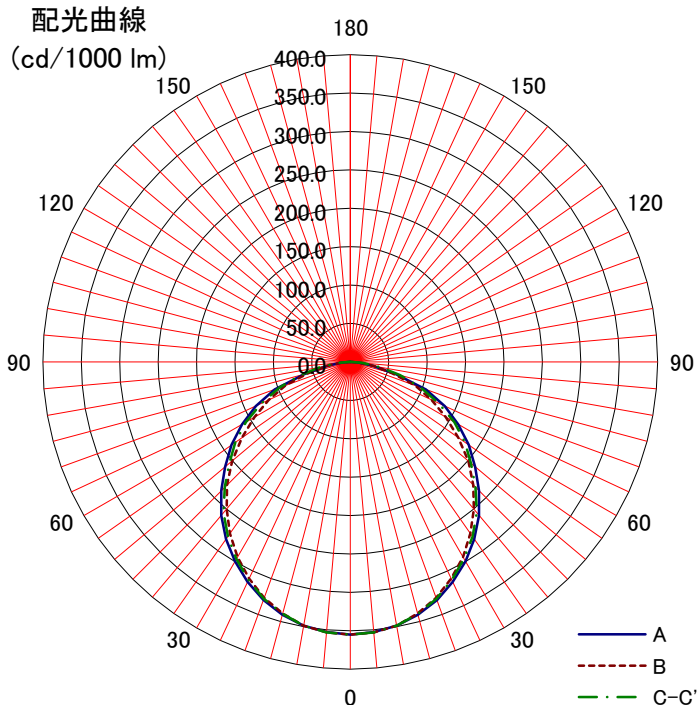

配光曲線

(cd/1000 lm)

