
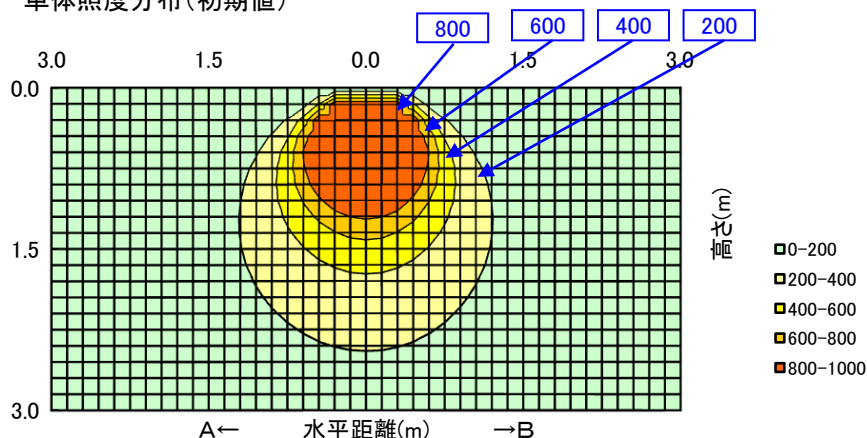
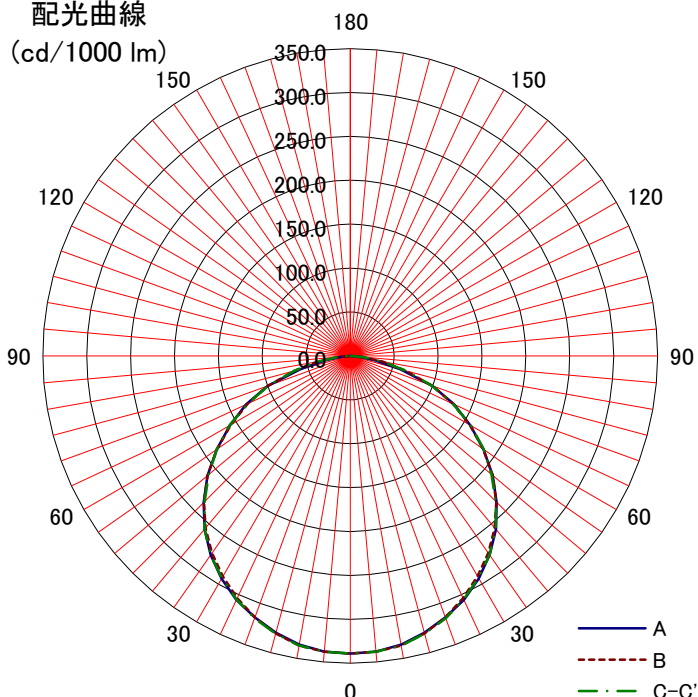


日立照明器具 照明特性

名称: 交換形LED笠付形	天井	反射率	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
				床	10%												
形式: PC4BCP	室指数	固有照明率 S/H=1.0															
＜備考＞ キャパシタスイッチ付			0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31
姿図		0.8	0.68	0.56	0.48	0.66	0.55	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40	
		1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47	
		1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54	
		1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60	
		2	0.90	0.83	0.77	0.89	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.68	
		2.5	0.94	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.79	0.75	0.73	
		3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.76	
光源形式	4	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.91	0.88	0.85	0.89	0.86	0.84	0.81		
CE403NA-JX14	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85		
器具光束	7	1.03	1.01	0.98	1.02	1.00	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.89		
3,530 lm	10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93		
器具効率 Ft= 100%			単体照度分布(初期値) 														
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔			配光曲線 														
A-A 1.30 H																	
B-B 1.28 H																	
保守率																	
良 0.88																	
中 0.86																	
否 0.81																	
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	339	339	339														
10	334	335	335														
20	317	317	318														
30	293	290	292														
40	258	256	258														
50	212	212	210														
60	158	157	159														
70	100	100	99														
80	29	38	38														
90		1	1														
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	