
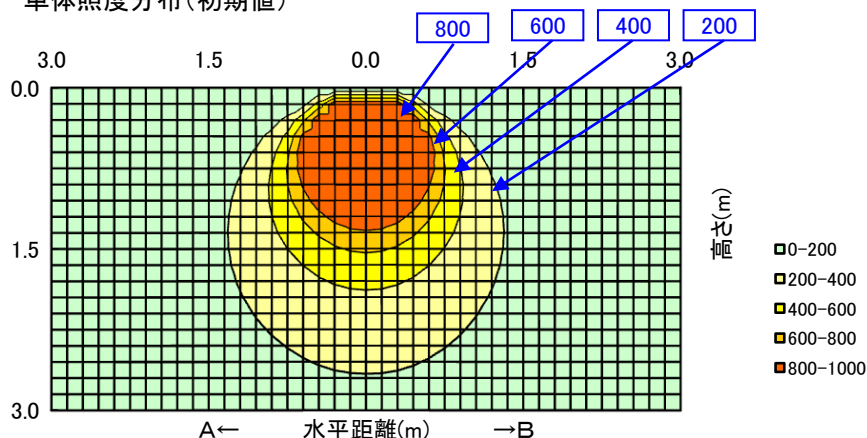
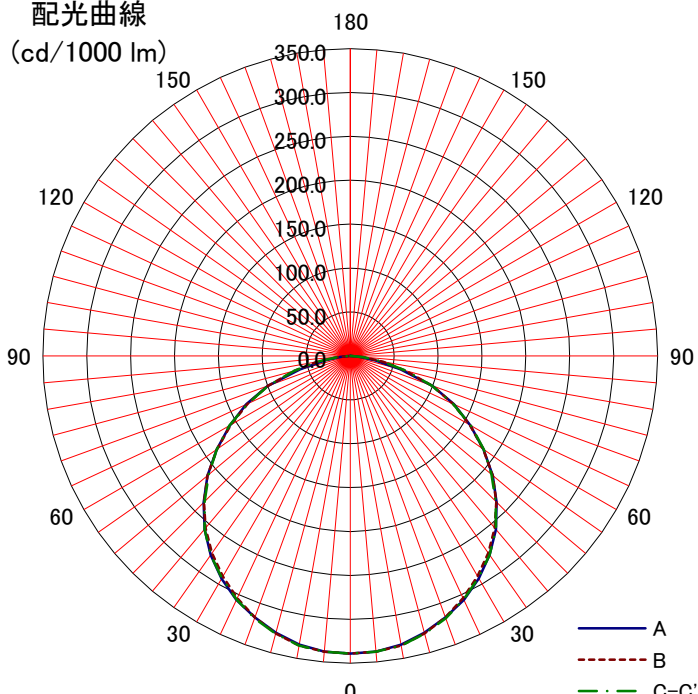


日立照明器具 照明特性

名称: 交換形LED笠付形	天井	80%			70%				50%			30%			0%																																																																																																																							
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																						
			床	10%														0%																																																																																																																				
形式: PC4BCP	反射率	固有照明率 S/H=1.0																																																																																																																																				
<備考> キャビースイッチ付	室指数																																																																																																																																					
		0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31																																																																																																																						
姿図		0.8	0.68	0.56	0.48	0.66	0.55	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40																																																																																																																						
		1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47																																																																																																																						
		1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54																																																																																																																						
		1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60																																																																																																																						
		2	0.90	0.83	0.77	0.89	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.68																																																																																																																						
		2.5	0.94	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.79	0.75	0.73																																																																																																																						
		3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.76																																																																																																																						
光源形式	4	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.91	0.88	0.85	0.89	0.86	0.84	0.81																																																																																																																							
CE404NA-J14	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85																																																																																																																							
器具光束	7	1.03	1.01	0.98	1.02	1.00	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.89																																																																																																																							
4,170 lm	10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93																																																																																																																							
器具効率 Ft= 100%		単体照度分布(初期値) 																																																																																																																																				
上方光束 Fu= 0%																																																																																																																																						
下方光束 Fd= 100%																																																																																																																																						
最大取付間隔		配光曲線 																																																																																																																																				
A-A 1.30 H																																																																																																																																						
B-B 1.28 H																																																																																																																																						
保守率	良	0.88	<table><tr><th>光度 (cd/1000 lm)</th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>339</td><td>339</td><td>339</td><td></td><td></td></tr><tr><td>10</td><td>334</td><td>335</td><td>335</td><td></td><td></td></tr><tr><td>20</td><td>317</td><td>317</td><td>318</td><td></td><td></td></tr><tr><td>30</td><td>293</td><td>290</td><td>292</td><td></td><td></td></tr><tr><td>40</td><td>258</td><td>256</td><td>258</td><td></td><td></td></tr><tr><td>50</td><td>212</td><td>212</td><td>210</td><td></td><td></td></tr><tr><td>60</td><td>158</td><td>157</td><td>159</td><td></td><td></td></tr><tr><td>70</td><td>100</td><td>100</td><td>99</td><td></td><td></td></tr><tr><td>80</td><td>29</td><td>38</td><td>38</td><td></td><td></td></tr><tr><td>90</td><td></td><td>1</td><td>1</td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>												光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0	0	339	339	339			10	334	335	335			20	317	317	318			30	293	290	292			40	258	256	258			50	212	212	210			60	158	157	159			70	100	100	99			80	29	38	38			90		1	1			100						110						120						130						140						150						160						170						180					
	光度 (cd/1000 lm)	A-0													B-B	C-0	A'-0	C'-0																																																																																																																				
	0	339													339	339																																																																																																																						
10	334	335	335																																																																																																																																			
20	317	317	318																																																																																																																																			
30	293	290	292																																																																																																																																			
40	258	256	258																																																																																																																																			
50	212	212	210																																																																																																																																			
60	158	157	159																																																																																																																																			
70	100	100	99																																																																																																																																			
80	29	38	38																																																																																																																																			
90		1	1																																																																																																																																			
100																																																																																																																																						
110																																																																																																																																						
120																																																																																																																																						
130																																																																																																																																						
140																																																																																																																																						
150																																																																																																																																						
160																																																																																																																																						
170																																																																																																																																						
180																																																																																																																																						
中	0.86																																																																																																																																					
否	0.81																																																																																																																																					