

日立照明器具 照明特性

形式: PJ2115S-G		天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
		室指数	照明率 S/H=1.0													
姿図 	光源	0.6	0.39	0.31	0.25	0.38	0.30	0.25	0.21	0.29	0.24	0.21	0.28	0.24	0.21	0.19
		0.8	0.46	0.38	0.32	0.45	0.37	0.32	0.28	0.36	0.31	0.27	0.34	0.30	0.27	0.25
		1	0.50	0.42	0.37	0.49	0.42	0.36	0.32	0.40	0.35	0.32	0.39	0.34	0.31	0.29
		1.25	0.54	0.47	0.42	0.53	0.46	0.41	0.37	0.44	0.40	0.36	0.43	0.39	0.36	0.33
		1.5	0.57	0.51	0.46	0.56	0.50	0.45	0.41	0.48	0.44	0.40	0.46	0.42	0.39	0.37
		2	0.61	0.56	0.51	0.60	0.54	0.50	0.47	0.52	0.49	0.46	0.50	0.47	0.45	0.42
		2.5	0.64	0.59	0.55	0.62	0.58	0.54	0.50	0.55	0.52	0.49	0.53	0.51	0.48	0.45
		3	0.65	0.61	0.57	0.64	0.60	0.56	0.53	0.57	0.54	0.52	0.55	0.53	0.51	0.48
		4	0.67	0.64	0.61	0.66	0.63	0.60	0.57	0.60	0.58	0.56	0.58	0.56	0.54	0.51
		5	0.69	0.66	0.63	0.67	0.65	0.62	0.60	0.62	0.60	0.58	0.60	0.58	0.57	0.54
品名	蛍光ランプ	7	0.71	0.69	0.66	0.69	0.67	0.65	0.64	0.65	0.63	0.62	0.63	0.61	0.60	0.57
形式	FL20SSW/18	10	0.72	0.71	0.69	0.71	0.69	0.68	0.67	0.67	0.66	0.65	0.65	0.64	0.63	0.60
光束	1,230 lm															

器具効率 Ft= 70.3%
 上方光束 Fu= 3.7%
 下方光束 Fd= 66.6%

配光分類

BZ-

最大取付間隔

A-A 1.28 H


B-B 1.24 H

保守率	良	0.74
	中	0.70
	否	0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	215	215	215	215	215
10	225	210	220	197	202
20	235	200	220	170	180
30	240	178	217	130	155
40	235	148	207	80	114
50	225	120	186	20	70
60	210	88	156		40
70	182	57	125		20
80	147		93		
90	110		67		
100	65		30		
110	40				
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

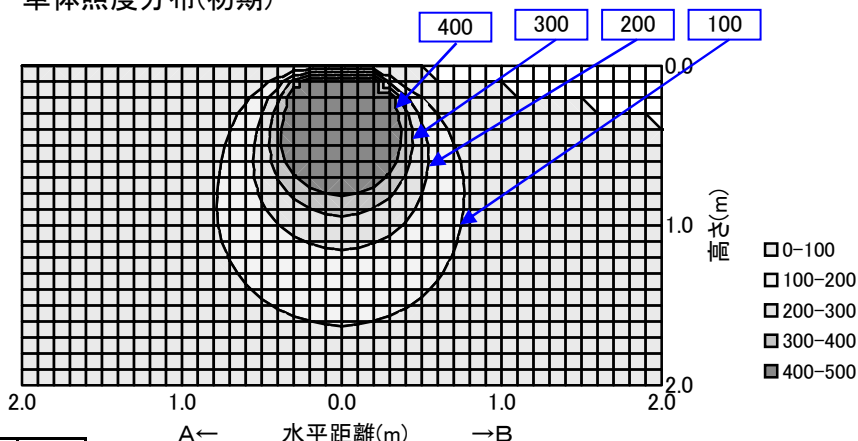

配光曲線

