


日立照明器具 照明特性

形式：PK2115S-G		反 射 率	天井	80%			70%				50%			30%			0%		
姿図 			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
光源		0.6	0.43	0.34	0.27	0.42	0.33	0.27	0.23	0.32	0.27	0.23	0.31	0.26	0.23	0.21			
		0.8	0.51	0.41	0.35	0.49	0.41	0.35	0.30	0.39	0.34	0.30	0.38	0.33	0.30	0.28			
		1	0.56	0.47	0.40	0.54	0.46	0.40	0.35	0.45	0.39	0.35	0.43	0.39	0.35	0.33			
		1.25	0.60	0.52	0.46	0.59	0.51	0.46	0.41	0.50	0.45	0.41	0.48	0.44	0.40	0.38			
		1.5	0.64	0.57	0.51	0.63	0.56	0.50	0.46	0.54	0.49	0.45	0.52	0.48	0.45	0.43			
品名 蛍光ランプ		2	0.69	0.62	0.57	0.67	0.61	0.57	0.53	0.60	0.56	0.52	0.58	0.54	0.51	0.49			
		2.5	0.71	0.66	0.61	0.70	0.65	0.61	0.57	0.63	0.60	0.56	0.61	0.58	0.55	0.53			
		3	0.73	0.69	0.64	0.72	0.68	0.64	0.60	0.66	0.62	0.59	0.64	0.61	0.59	0.56			
		4	0.76	0.72	0.69	0.75	0.71	0.68	0.65	0.69	0.66	0.64	0.67	0.65	0.63	0.61			
		5	0.78	0.74	0.72	0.76	0.73	0.71	0.68	0.71	0.69	0.67	0.70	0.68	0.66	0.63			
形式 FL20SSW/18		7	0.80	0.77	0.75	0.79	0.76	0.74	0.72	0.74	0.73	0.71	0.73	0.71	0.70	0.67			
		10	0.81	0.80	0.78	0.80	0.79	0.77	0.76	0.77	0.75	0.74	0.75	0.74	0.73	0.70			
光束 1,230 lm																			

器具効率 $F_t = 78.1\%$

上方光束 $F_u = 0.7\%$

下方光束 $F_d = 77.5\%$

配光分類

BZ-

最大取付間隔

A-A 1.40 H


B-B 1.22 H

保守率	良	0.74
	中	0.70
	否	0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	230	230	230
10	228	227	225
20	223	210	214
30	212	187	198
40	203	164	178
50	190	138	155
60	167	104	128
70	138	63	88
80	97	25	25
90	25	15	5
100	2		1
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

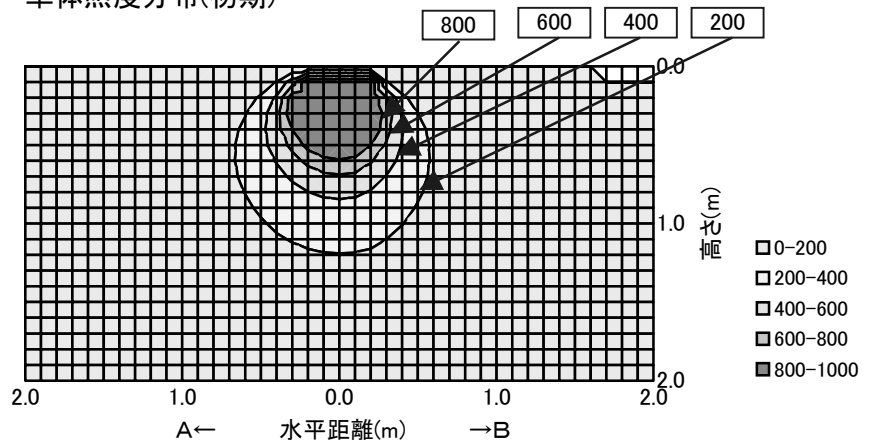

配光曲線

