

日立照明器具 照明特性

形式： PK2215S-G		反 射 率	天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図 		0.6	0.44	0.34	0.28	0.43	0.34	0.28	0.24	0.33	0.28	0.24	0.32	0.27	0.23	0.22		
		0.8	0.52	0.43	0.36	0.51	0.42	0.36	0.31	0.41	0.35	0.31	0.40	0.35	0.31	0.29		
		1	0.57	0.48	0.42	0.56	0.48	0.41	0.37	0.46	0.41	0.37	0.45	0.40	0.36	0.34		
		1.25	0.62	0.54	0.48	0.61	0.53	0.47	0.43	0.52	0.46	0.42	0.50	0.46	0.42	0.40		
		1.5	0.66	0.58	0.53	0.64	0.57	0.52	0.48	0.56	0.51	0.47	0.54	0.50	0.47	0.45		
		2	0.70	0.64	0.59	0.69	0.63	0.59	0.55	0.62	0.58	0.54	0.60	0.56	0.53	0.51		
		2.5	0.73	0.68	0.63	0.72	0.67	0.63	0.59	0.65	0.62	0.58	0.64	0.60	0.58	0.56		
		3	0.75	0.71	0.66	0.74	0.70	0.66	0.62	0.68	0.65	0.62	0.66	0.63	0.61	0.59		
光 源		4	0.78	0.74	0.71	0.77	0.73	0.70	0.67	0.71	0.69	0.66	0.70	0.67	0.65	0.63		
品名	蛍光ランプ	5	0.80	0.76	0.74	0.78	0.75	0.73	0.70	0.74	0.71	0.69	0.72	0.70	0.68	0.66		
形式	FL20SSW/18	7	0.82	0.79	0.77	0.81	0.78	0.76	0.75	0.77	0.75	0.73	0.75	0.73	0.72	0.70		
光束	2,460 lm	10	0.83	0.82	0.80	0.82	0.81	0.79	0.78	0.79	0.78	0.77	0.77	0.76	0.75	0.73		

器具効率 $F_t = 79.6\%$
 上方光束 $F_u = 0.1\%$
 下方光束 $F_d = 79.5\%$

配光分類

BZ-

最大取付間隔

A-A 1.44 H


B-B 1.26 H

保守率	良	0.74
	中	0.70
	否	0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	234	234	234
10	232	230	232
20	229	218	223
30	223	197	211
40	210	172	194
50	189	140	171
60	158	103	140
70	110	63	99
80	51	24	46
90	6	0	3
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

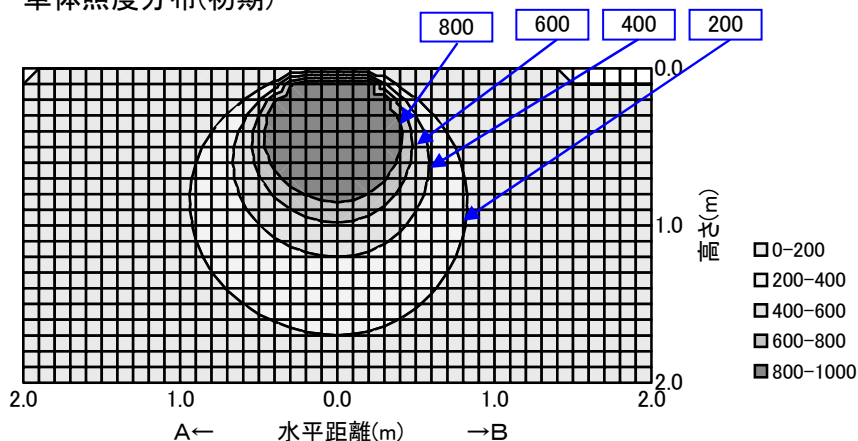

配光曲線

