
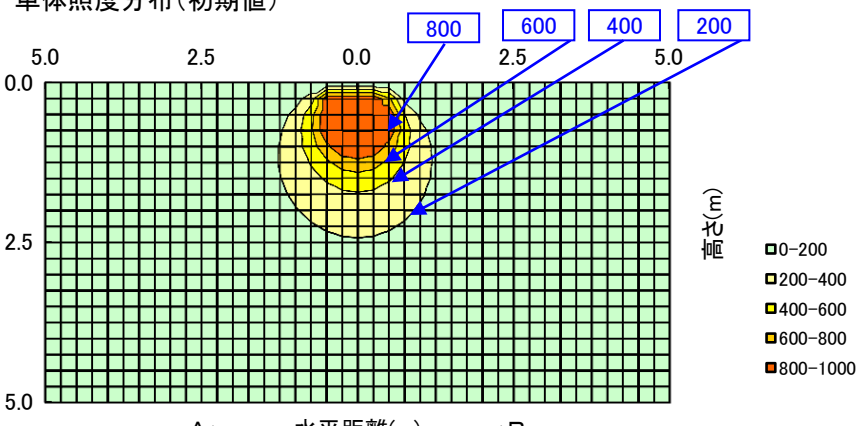
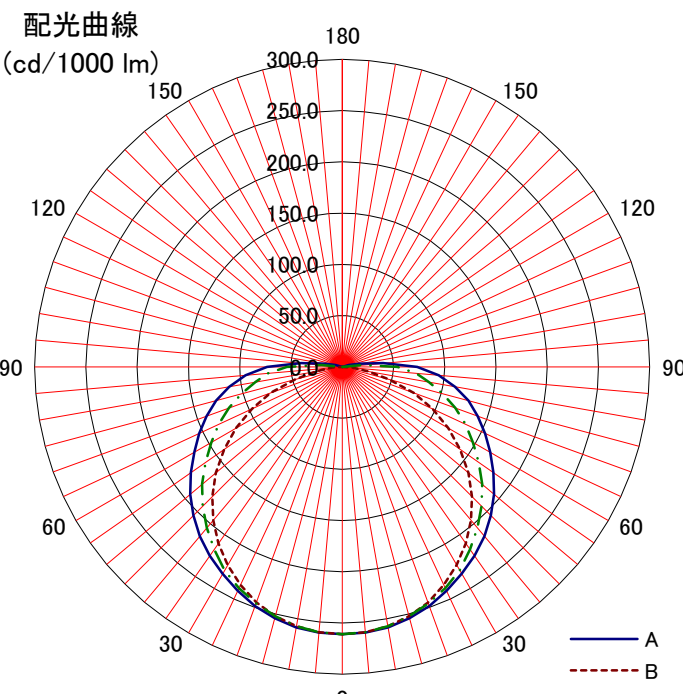


日立照明器具 照明特性

名称: 直管形LED搭載器具	天井	80%			70%				50%			30%			0%																																																																																																																																						
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																																					
			床	10%														0%																																																																																																																																			
形式: PKE11108-JL24AF	室指数	照明率 S/H=1.0																																																																																																																																																			
<備考>	0.6	0.52	0.40	0.32	0.51	0.39	0.32	0.27	0.38	0.31	0.26	0.37	0.31	0.26	0.24																																																																																																																																						
	0.8	0.61	0.49	0.41	0.59	0.48	0.40	0.35	0.46	0.40	0.34	0.45	0.39	0.34	0.32																																																																																																																																						
姿図 	1	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.40	0.51	0.45	0.40	0.37																																																																																																																																						
	1.25	0.72	0.62	0.54	0.70	0.61	0.53	0.48	0.59	0.52	0.47	0.57	0.51	0.46	0.43																																																																																																																																						
	1.5	0.77	0.67	0.59	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.56	0.51	0.49																																																																																																																																						
	2	0.82	0.74	0.67	0.80	0.73	0.66	0.61	0.70	0.65	0.60	0.68	0.63	0.59	0.56																																																																																																																																						
	2.5	0.86	0.78	0.72	0.84	0.77	0.71	0.66	0.74	0.69	0.65	0.72	0.68	0.64	0.61																																																																																																																																						
	3	0.88	0.81	0.76	0.86	0.80	0.75	0.70	0.77	0.73	0.69	0.75	0.71	0.68	0.64																																																																																																																																						
	4	0.91	0.86	0.81	0.89	0.84	0.80	0.76	0.82	0.78	0.74	0.79	0.76	0.73	0.70																																																																																																																																						
光源	4	0.91	0.86	0.81	0.89	0.84	0.80	0.76	0.82	0.78	0.74	0.79	0.76	0.73	0.70																																																																																																																																						
品名 直管形LEDランプ	5	0.93	0.89	0.85	0.92	0.87	0.84	0.80	0.85	0.81	0.78	0.82	0.79	0.77	0.73																																																																																																																																						
形式 LDK110SS-N/34/45F	7	0.96	0.93	0.90	0.94	0.91	0.88	0.86	0.88	0.86	0.84	0.86	0.84	0.82	0.78																																																																																																																																						
光束 4,500 lm	10	0.98	0.96	0.93	0.97	0.94	0.92	0.90	0.92	0.90	0.88	0.89	0.87	0.86	0.82																																																																																																																																						
器具効率 Ft= 95.7%		単体照度分布(初期値) 																																																																																																																																																			
上方光束 Fu= 2.5%																																																																																																																																																					
下方光束 Fd= 93.2%																																																																																																																																																					
最大取付間隔																																																																																																																																																					
A-A 1.34 H																																																																																																																																																					
B-B 1.28 H																																																																																																																																																					
保守率	良	0.86	配光曲線 (cd/1000 lm) 																																																																																																																																																		
	中	0.81																																																																																																																																																			
	否	0.72																																																																																																																																																			
光度 (cd/1000 lm)		<table><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>261</td><td>261</td><td>261</td><td></td><td></td></tr><tr><td>10</td><td>258</td><td>257</td><td>257</td><td></td><td></td></tr><tr><td>20</td><td>249</td><td>245</td><td>246</td><td></td><td></td></tr><tr><td>30</td><td>233</td><td>224</td><td>229</td><td></td><td></td></tr><tr><td>40</td><td>216</td><td>196</td><td>205</td><td></td><td></td></tr><tr><td>50</td><td>194</td><td>161</td><td>178</td><td></td><td></td></tr><tr><td>60</td><td>167</td><td>120</td><td>148</td><td></td><td></td></tr><tr><td>70</td><td>141</td><td>74</td><td>118</td><td></td><td></td></tr><tr><td>80</td><td>112</td><td>26</td><td>86</td><td></td><td></td></tr><tr><td>90</td><td>73</td><td></td><td>54</td><td></td><td></td></tr><tr><td>100</td><td>17</td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>																A-0	B-B	C-0	A'-0	C'-0	0	261	261	261			10	258	257	257			20	249	245	246			30	233	224	229			40	216	196	205			50	194	161	178			60	167	120	148			70	141	74	118			80	112	26	86			90	73		54			100	17					110						120						130						140						150						160						170						180																		
	A-0	B-B															C-0	A'-0	C'-0																																																																																																																																		
0	261	261															261																																																																																																																																				
10	258	257	257																																																																																																																																																		
20	249	245	246																																																																																																																																																		
30	233	224	229																																																																																																																																																		
40	216	196	205																																																																																																																																																		
50	194	161	178																																																																																																																																																		
60	167	120	148																																																																																																																																																		
70	141	74	118																																																																																																																																																		
80	112	26	86																																																																																																																																																		
90	73		54																																																																																																																																																		
100	17																																																																																																																																																				
110																																																																																																																																																					
120																																																																																																																																																					
130																																																																																																																																																					
140																																																																																																																																																					
150																																																																																																																																																					
160																																																																																																																																																					
170																																																																																																																																																					
180																																																																																																																																																					