


日立照明器具 照明特性

形式: PKE11108-JL24B		反 射 率	天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
		0.6	0.54	0.41	0.33	0.53	0.41	0.33	0.28	0.39	0.32	0.27	0.38	0.32	0.27	0.25			
		0.8	0.63	0.51	0.42	0.61	0.50	0.42	0.36	0.48	0.41	0.36	0.47	0.40	0.35	0.33			
		1	0.69	0.58	0.49	0.67	0.56	0.49	0.43	0.55	0.47	0.42	0.53	0.46	0.41	0.39			
		1.25	0.75	0.64	0.56	0.73	0.63	0.55	0.49	0.61	0.54	0.49	0.59	0.53	0.48	0.45			
		1.5	0.79	0.69	0.62	0.77	0.68	0.61	0.55	0.66	0.59	0.54	0.63	0.58	0.53	0.50			
		2	0.85	0.77	0.70	0.83	0.75	0.69	0.63	0.73	0.67	0.62	0.70	0.65	0.61	0.58			
		2.5	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.77	0.72	0.67	0.74	0.70	0.66	0.63			
		3	0.91	0.84	0.79	0.89	0.83	0.78	0.73	0.80	0.76	0.71	0.78	0.74	0.70	0.67			
光源		4	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.85	0.81	0.77	0.82	0.79	0.76	0.72			
品名	LED直管ランプ	5	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.79	0.76			
形式	LDK110SS-N/36/45	7	1.00	0.96	0.93	0.98	0.95	0.92	0.89	0.92	0.89	0.87	0.89	0.87	0.85	0.81			
器具光束	4,300 lm	10	1.02	0.99	0.97	1.00	0.98	0.96	0.93	0.95	0.93	0.91	0.92	0.91	0.89	0.85			

器具効率 Ft= 100.0%		
上方光束 Fu= 3.3%		
下方光束 Fd= 96.7%		
配光分類		
BZ-		
最大取付間隔		
A-A	1.34	H
B-B	1.28	H
保守率	良	0.86
	中	0.81
	否	0.72

単体照度分布(初期)

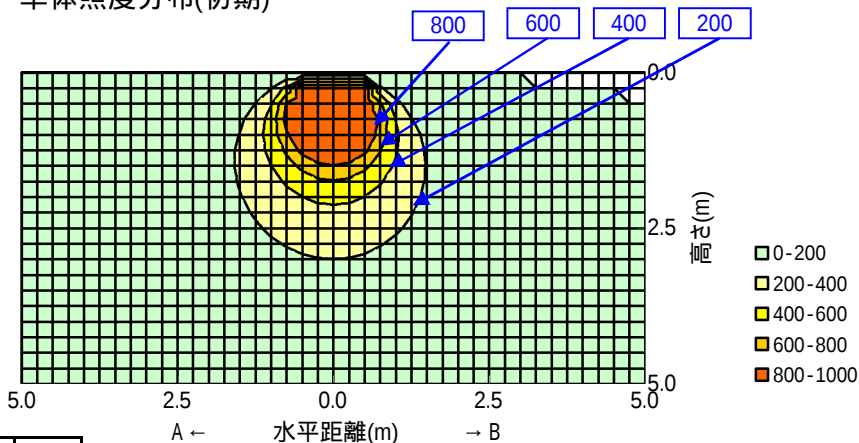

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	271	271	271		
10	268	267	267		
20	258	254	255		
30	242	232	238		
40	224	203	213		
50	201	167	185		
60	173	124	153		
70	146	77	122		
80	116	27	89		
90	76		56		
100	18				
110					
120					
130					
140					
150					
160					
170					
180					

配光曲線

