



日立照明器具 照明特性

名称:直管形LED搭載器具	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%												
形式:PKE11108-JM24AE	室指数	照明率 S/H=1.0														
<備考>	0.6	0.52	0.40	0.32	0.51	0.39	0.32	0.27	0.38	0.31	0.26	0.37	0.31	0.26	0.24	
	0.8	0.61	0.49	0.41	0.59	0.48	0.40	0.35	0.46	0.40	0.34	0.45	0.39	0.34	0.32	
姿図 	1	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.40	0.51	0.45	0.40	0.37	
	1.25	0.72	0.62	0.54	0.70	0.61	0.53	0.48	0.59	0.52	0.47	0.57	0.51	0.46	0.43	
	1.5	0.77	0.67	0.59	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.56	0.51	0.49	
	2	0.82	0.74	0.67	0.80	0.73	0.66	0.61	0.70	0.65	0.60	0.68	0.63	0.59	0.56	
	2.5	0.86	0.78	0.72	0.84	0.77	0.71	0.66	0.74	0.69	0.65	0.72	0.68	0.64	0.61	
	3	0.88	0.81	0.76	0.86	0.80	0.75	0.70	0.77	0.73	0.69	0.75	0.71	0.68	0.64	
	4	0.91	0.86	0.81	0.89	0.84	0.80	0.76	0.82	0.78	0.74	0.79	0.76	0.73	0.70	
光源	5	0.93	0.89	0.85	0.92	0.87	0.84	0.80	0.85	0.81	0.78	0.82	0.79	0.77	0.73	
品名 直管形LEDランプ	7	0.96	0.93	0.90	0.94	0.91	0.88	0.86	0.88	0.86	0.84	0.86	0.84	0.82	0.78	
形式 LDK110SS-D/42/67NE	10	0.98	0.96	0.93	0.97	0.94	0.92	0.90	0.92	0.90	0.88	0.89	0.87	0.86	0.82	
光束 6,730 lm																

器具効率 Ft= 95.7%					
上方光束 Fu= 2.5%					
下方光束 Fd= 93.2%					
最大取付間隔					
A-A		1.34 H			
B-B		1.28 H			
保守率	良	0.86			
	中	0.81			
	否	0.72			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	261	261	261		
10	258	257	257		
20	249	245	246		
30	233	224	229		
40	216	196	205		
50	194	161	178		
60	167	120	148		
70	141	74	118		
80	112	26	86		
90	73		54		
100	17				
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期値)

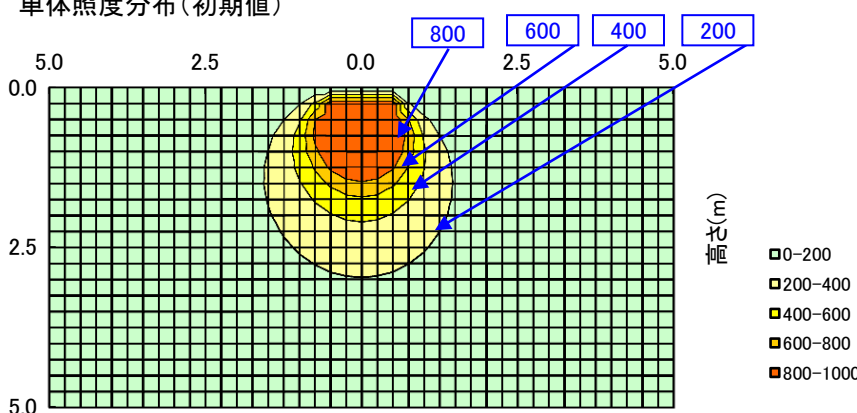

5.0 2.5 0.0 2.5 5.0


0.0 2.5 5.0

水平距離(m)

単位: m

- 0-200
- 200-400
- 400-600
- 600-800
- 800-1000

配光曲線
(cd/1000 lm)

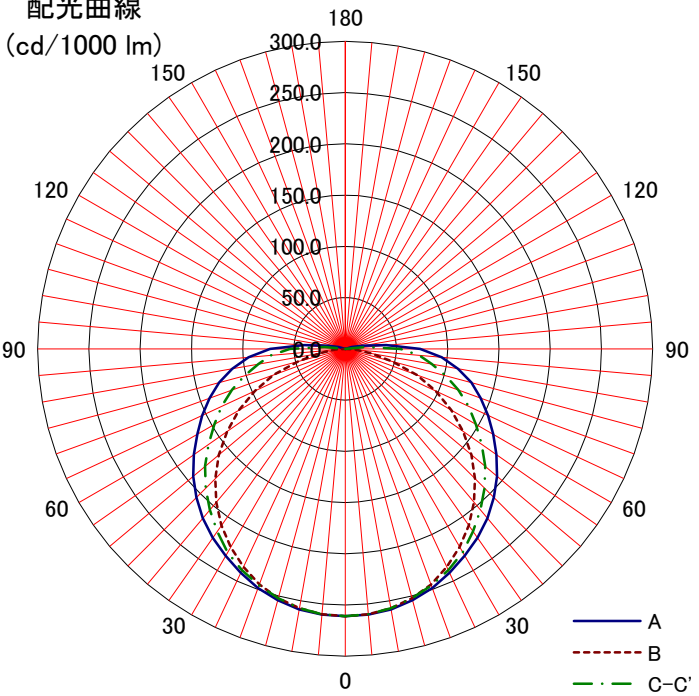

180 150 120 90 60 30 0

300.0 250.0 200.0 150.0 100.0 50.0 0.0

A B C-C'