
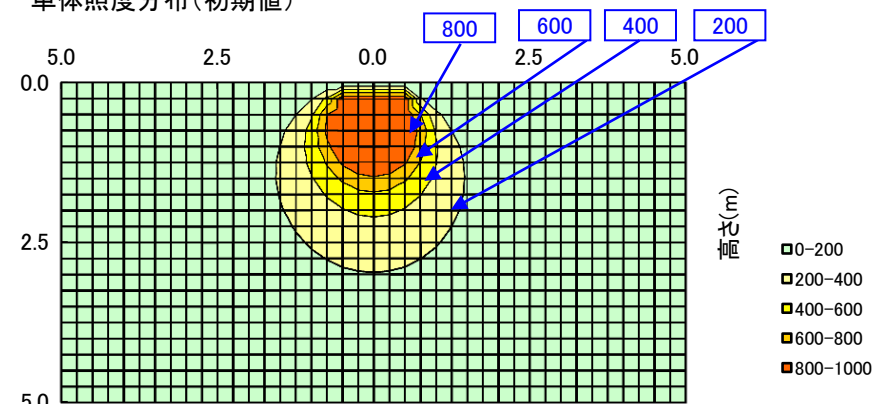
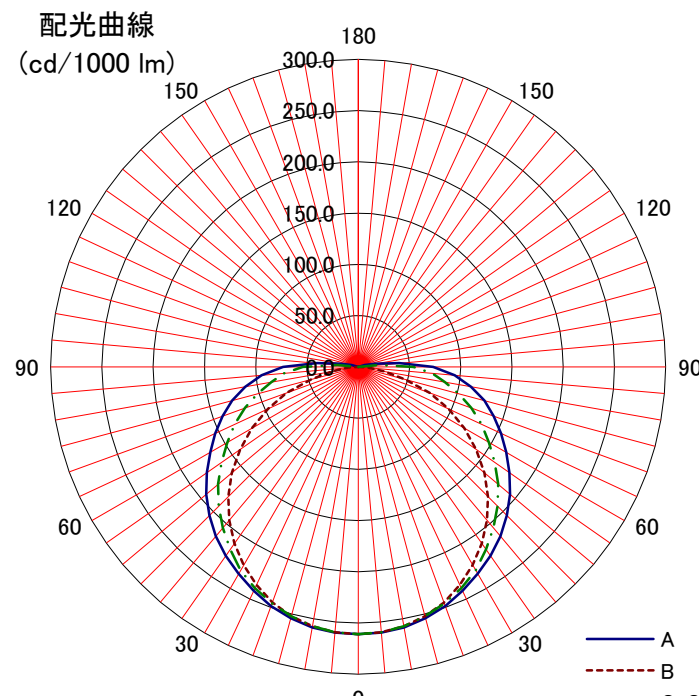


日立照明器具 照明特性

名称:直管形LED搭載器具	天井	反射率	80%			70%				50%			30%			0%					
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
				床	10%														0%		
形式:PKE11108-XM24E			照明率 S/H=1.0																		
<備考>		室指数																			
		0.6	0.52	0.40	0.32	0.51	0.39	0.32	0.27	0.38	0.31	0.26	0.37	0.31	0.26	0.24					
姿図		0.8	0.61	0.49	0.41	0.59	0.48	0.40	0.35	0.46	0.40	0.34	0.45	0.39	0.34	0.32					
		1	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.40	0.51	0.45	0.40	0.37					
		1.25	0.72	0.62	0.54	0.70	0.61	0.53	0.48	0.59	0.52	0.47	0.57	0.51	0.46	0.43					
		1.5	0.77	0.67	0.59	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.56	0.51	0.49					
		2	0.82	0.74	0.67	0.80	0.73	0.66	0.61	0.70	0.65	0.60	0.68	0.63	0.59	0.56					
		2.5	0.86	0.78	0.72	0.84	0.77	0.71	0.66	0.74	0.69	0.65	0.72	0.68	0.64	0.61					
		3	0.88	0.81	0.76	0.86	0.80	0.75	0.70	0.77	0.73	0.69	0.75	0.71	0.68	0.64					
		4	0.91	0.86	0.81	0.89	0.84	0.80	0.76	0.82	0.78	0.74	0.79	0.76	0.73	0.70					
光源	5	0.93	0.89	0.85	0.92	0.87	0.84	0.80	0.85	0.81	0.78	0.82	0.79	0.77	0.73						
品名:直管形LEDランプ		7	0.96	0.93	0.90	0.94	0.91	0.88	0.86	0.88	0.86	0.84	0.86	0.84	0.82	0.78					
形式:LDK110SS-D/42/67NE		10	0.98	0.96	0.93	0.97	0.94	0.92	0.90	0.92	0.90	0.88	0.89	0.87	0.86	0.82					
光束:6,730 lm																					
器具効率 Ft= 95.7%			単体照度分布(初期値) 																		
上方光束 Fu= 2.5%																					
下方光束 Fd= 93.2%																					
最大取付間隔																					
A-A 1.34 H																					
B-B 1.28 H																					
保守率	良	0.86																			
	中	0.81																			
	否	0.72																			
光度 (cd/1000 lm)			配光曲線 (cd/1000 lm) 																		
	A-0	B-B																	C-0	A'-0	C'-0
0	261	261																	261		
10	258	257																	257		
20	249	245																	246		
30	233	224																	229		
40	216	196																	205		
50	194	161																	178		
60	167	120																	148		
70	141	74																	118		
80	112	26																	86		
90	73		54																		
100	17																				
110																					
120																					
130																					
140																					
150																					
160																					
170																					
180																					