



日立照明器具 照明特性

形式: PKE11208-J24A		反 射 率	天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図 		0.6	0.54	0.41	0.33	0.52	0.41	0.33	0.28	0.39	0.32	0.27	0.38	0.32	0.27	0.25		
		0.8	0.63	0.51	0.43	0.61	0.50	0.42	0.36	0.48	0.41	0.36	0.46	0.40	0.35	0.33		
		1	0.69	0.58	0.49	0.67	0.57	0.49	0.43	0.54	0.47	0.42	0.52	0.46	0.41	0.39		
		1.25	0.75	0.64	0.56	0.73	0.63	0.55	0.50	0.61	0.54	0.49	0.58	0.53	0.48	0.45		
		1.5	0.79	0.69	0.62	0.77	0.68	0.61	0.55	0.66	0.59	0.54	0.63	0.58	0.53	0.50		
		2	0.85	0.77	0.70	0.83	0.75	0.69	0.63	0.72	0.67	0.62	0.70	0.65	0.61	0.58		
		2.5	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.77	0.72	0.68	0.74	0.70	0.66	0.63		
		3	0.91	0.85	0.79	0.89	0.83	0.78	0.73	0.80	0.75	0.71	0.77	0.73	0.70	0.66		
光 源		4	0.94	0.89	0.84	0.92	0.87	0.83	0.79	0.84	0.81	0.77	0.82	0.78	0.75	0.72		
品名	LED直管ランプ	5	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.87	0.84	0.81	0.85	0.82	0.79	0.76		
形式	LDK110SS・N/55/69	7	0.99	0.96	0.93	0.98	0.94	0.92	0.89	0.91	0.89	0.87	0.88	0.86	0.84	0.81		
器具光束	13,020 lm	10	1.02	0.99	0.97	1.00	0.98	0.95	0.93	0.95	0.93	0.91	0.92	0.90	0.89	0.85		

器具効率 Ft= 100.0%		
上方光束 Fu= 4.8%		
下方光束 Fd= 95.2%		
配光分類		
BZ-		
最大取付間隔		
A-A	1.34	H
B-B	1.26	H
保守率	良	0.86
	中	0.81
	否	0.72

単体照度分布(初期)

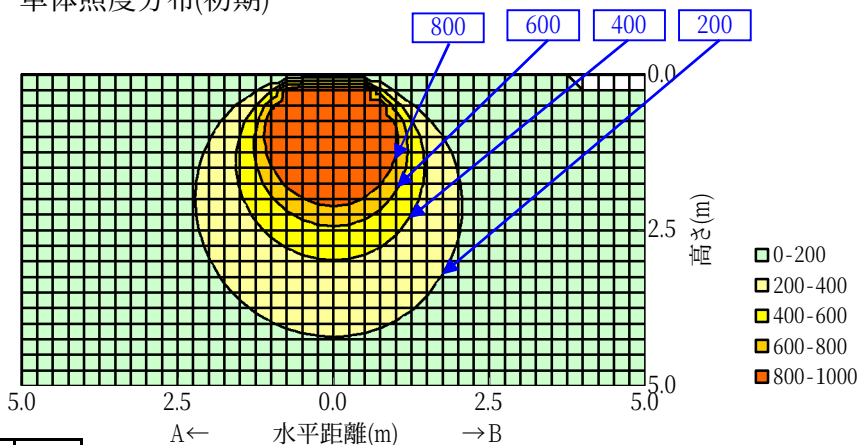

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	272	272	272		
10	268	267	267		
20	259	254	255		
30	243	229	237		
40	222	202	212		
50	199	166	182		
60	172	127	151		
70	144	75	119		
80	110	34	87		
90	61		41		
100	36		15		
110	10				
120					
130					
140					
150					
160					
170					
180					

配光曲線

