
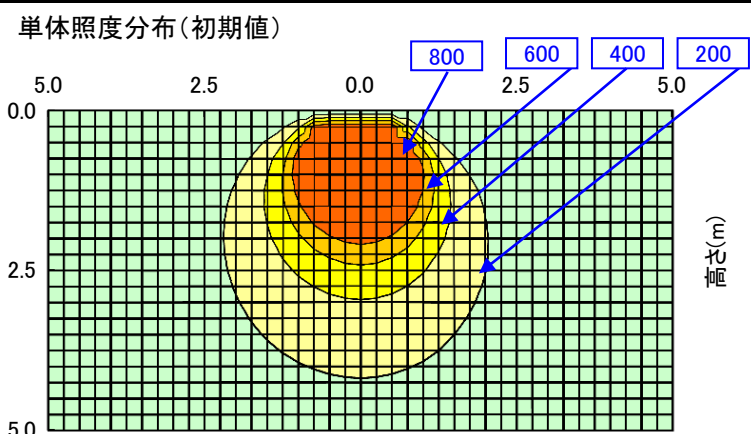
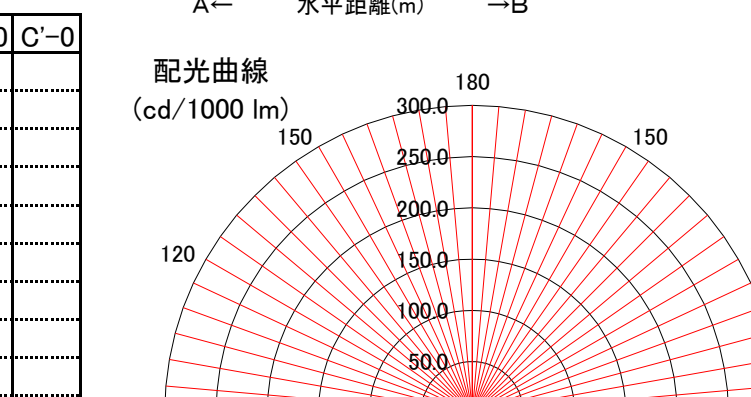
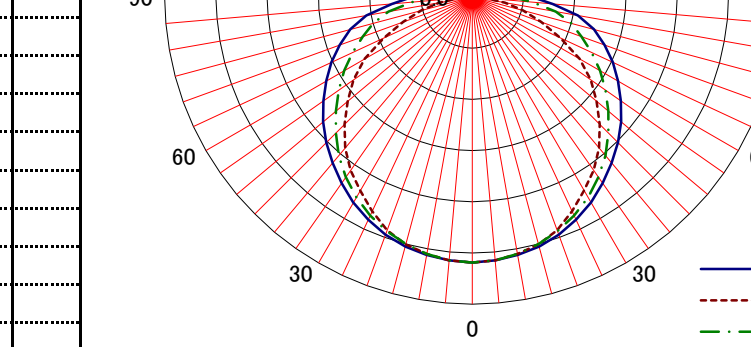


日立照明器具 照明特性

名称:直管形LED搭載器具	天井 反射率 壁 床	80%			70%				50%			30%			0%		
		70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
		10%														0%	
形式:PKE11208-JM24AE	室指数	照明率 S/H=1.0															
備考	0.6	0.51	0.40	0.32	0.50	0.39	0.32	0.26	0.37	0.31	0.26	0.36	0.30	0.26	0.24		
	0.8	0.60	0.49	0.41	0.58	0.48	0.40	0.35	0.46	0.39	0.34	0.44	0.38	0.34	0.31		
姿図 	1	0.66	0.55	0.47	0.64	0.54	0.46	0.41	0.52	0.45	0.40	0.50	0.44	0.40	0.37		
	1.25	0.71	0.61	0.54	0.70	0.60	0.53	0.47	0.58	0.52	0.46	0.56	0.50	0.46	0.43		
	1.5	0.76	0.66	0.59	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.60	0.55	0.51	0.48		
	2	0.81	0.73	0.67	0.79	0.72	0.66	0.61	0.69	0.64	0.59	0.67	0.62	0.58	0.55		
	2.5	0.85	0.78	0.72	0.83	0.76	0.71	0.66	0.73	0.69	0.64	0.71	0.67	0.63	0.60		
	3	0.87	0.81	0.75	0.85	0.79	0.74	0.70	0.76	0.72	0.68	0.74	0.70	0.67	0.63		
	4	0.90	0.85	0.80	0.88	0.83	0.79	0.75	0.81	0.77	0.74	0.78	0.75	0.72	0.68		
光源	4	0.90	0.85	0.80	0.88	0.83	0.79	0.75	0.81	0.77	0.74	0.78	0.75	0.72	0.68		
品名:直管形LEDランプ	5	0.92	0.88	0.84	0.90	0.86	0.83	0.79	0.83	0.80	0.78	0.81	0.78	0.76	0.72		
形式:LDK110SS-D/42/67NE	7	0.95	0.92	0.89	0.93	0.90	0.87	0.85	0.87	0.85	0.83	0.84	0.82	0.80	0.77		
光束:13,460 lm	10	0.97	0.95	0.92	0.95	0.93	0.91	0.89	0.90	0.88	0.87	0.87	0.86	0.85	0.81		
器具効率 Ft= 94.4%		単体照度分布(初期値) 															
上方光束 Fu= 3.6%																	
下方光束 Fd= 90.8%																	
最大取付間隔		配光曲線 															
A-A 1.34 H																	
B-B 1.26 H																	
保守率	良	0.86	器具効率 														
	中	0.81															
	否	0.72															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	260	260	260														
10	256	255	255														
20	247	242	243														
30	232	219	226														
40	212	193	202														
50	190	158	174														
60	164	121	144														
70	137	72	114														
80	105	33	83														
90	58		39														
100	34		14														
110	10																
120																	
130																	
140																	
150																	
160																	
170																	
180																	