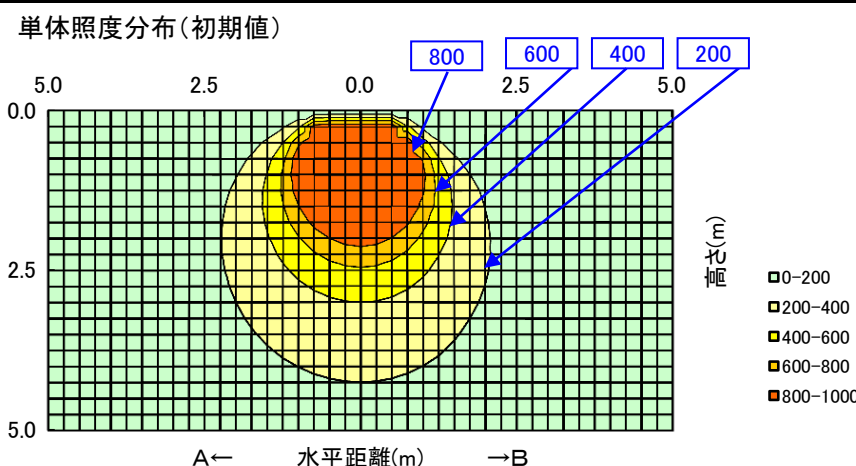
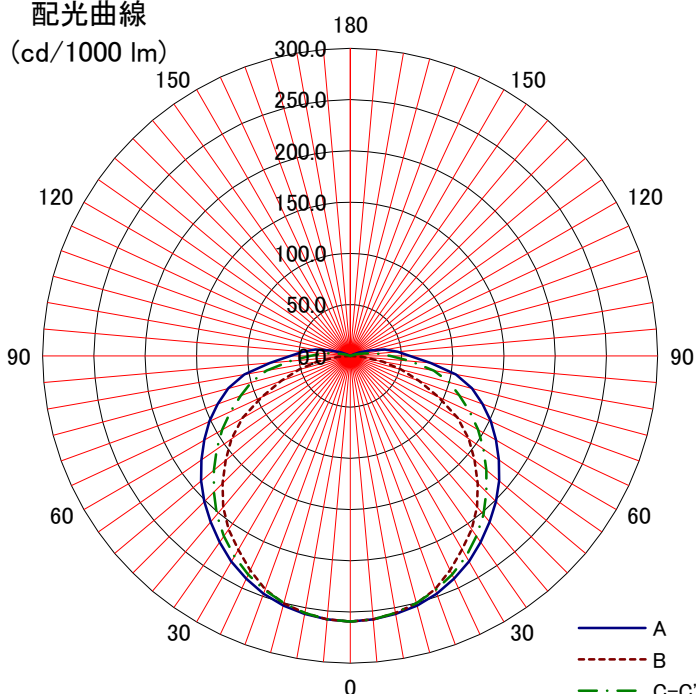


日立照明器具 照明特性

名称:直管形LED搭載器具	天井	反射率	80%			70%				50%			30%			0%																																																																																																																							
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																						
				床	10%														0%																																																																																																																				
形式:PKE11208-JM24AE	室指数		照明率 S/H=1.0																																																																																																																																				
<備考>	0.6	0.51	0.40	0.32	0.50	0.39	0.32	0.26	0.37	0.31	0.26	0.36	0.30	0.26	0.24																																																																																																																								
	0.8	0.60	0.49	0.41	0.58	0.48	0.40	0.35	0.46	0.39	0.34	0.44	0.38	0.34	0.31																																																																																																																								
姿図	1	0.66	0.55	0.47	0.64	0.54	0.46	0.41	0.52	0.45	0.40	0.50	0.44	0.40	0.37																																																																																																																								
	1.25	0.71	0.61	0.54	0.70	0.60	0.53	0.47	0.58	0.52	0.46	0.56	0.50	0.46	0.43																																																																																																																								
	1.5	0.76	0.66	0.59	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.60	0.55	0.51	0.48																																																																																																																								
	2	0.81	0.73	0.67	0.79	0.72	0.66	0.61	0.69	0.64	0.59	0.67	0.62	0.58	0.55																																																																																																																								
	2.5	0.85	0.78	0.72	0.83	0.76	0.71	0.66	0.73	0.69	0.64	0.71	0.67	0.63	0.60																																																																																																																								
	3	0.87	0.81	0.75	0.85	0.79	0.74	0.70	0.76	0.72	0.68	0.74	0.70	0.67	0.63																																																																																																																								
	4	0.90	0.85	0.80	0.88	0.83	0.79	0.75	0.81	0.77	0.74	0.78	0.75	0.72	0.68																																																																																																																								
光源	4	0.90	0.85	0.80	0.88	0.83	0.79	0.75	0.81	0.77	0.74	0.78	0.75	0.72	0.68																																																																																																																								
品名:直管形LEDランプ	5	0.92	0.88	0.84	0.90	0.86	0.83	0.79	0.83	0.80	0.78	0.81	0.78	0.76	0.72																																																																																																																								
形式:LDK110SS-N/42/69NE	7	0.95	0.92	0.89	0.93	0.90	0.87	0.85	0.87	0.85	0.83	0.84	0.82	0.80	0.77																																																																																																																								
光束:13,900 lm	10	0.97	0.95	0.92	0.95	0.93	0.91	0.89	0.90	0.88	0.87	0.87	0.86	0.85	0.81																																																																																																																								
器具効率 Ft= 94.4%		単体照度分布(初期値) 																																																																																																																																					
上方光束 Fu= 3.6%																																																																																																																																							
下方光束 Fd= 90.8%																																																																																																																																							
最大取付間隔																																																																																																																																							
A-A 1.34 H		配光曲線 (cd/1000 lm) 																																																																																																																																					
B-B 1.26 H																																																																																																																																							
保守率																																																																																																																																							
良	0.86	A ← 水平距離(m) → B																																																																																																																																					
中	0.81																																																																																																																																						
否	0.72																																																																																																																																						
光度 (cd/1000 lm)		<table><tr><td></td><td>A-0</td><td>B-B</td><td>C-0</td><td>A'-0</td><td>C'-0</td></tr><tr><td>0</td><td>260</td><td>260</td><td>260</td><td></td><td></td></tr><tr><td>10</td><td>256</td><td>255</td><td>255</td><td></td><td></td></tr><tr><td>20</td><td>247</td><td>242</td><td>243</td><td></td><td></td></tr><tr><td>30</td><td>232</td><td>219</td><td>226</td><td></td><td></td></tr><tr><td>40</td><td>212</td><td>193</td><td>202</td><td></td><td></td></tr><tr><td>50</td><td>190</td><td>158</td><td>174</td><td></td><td></td></tr><tr><td>60</td><td>164</td><td>121</td><td>144</td><td></td><td></td></tr><tr><td>70</td><td>137</td><td>72</td><td>114</td><td></td><td></td></tr><tr><td>80</td><td>105</td><td>33</td><td>83</td><td></td><td></td></tr><tr><td>90</td><td>58</td><td></td><td>39</td><td></td><td></td></tr><tr><td>100</td><td>34</td><td></td><td>14</td><td></td><td></td></tr><tr><td>110</td><td>10</td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>															A-0	B-B	C-0	A'-0	C'-0	0	260	260	260			10	256	255	255			20	247	242	243			30	232	219	226			40	212	193	202			50	190	158	174			60	164	121	144			70	137	72	114			80	105	33	83			90	58		39			100	34		14			110	10					120						130						140						150						160						170						180					
	A-0															B-B	C-0	A'-0	C'-0																																																																																																																				
0	260															260	260																																																																																																																						
10	256															255	255																																																																																																																						
20	247															242	243																																																																																																																						
30	232															219	226																																																																																																																						
40	212															193	202																																																																																																																						
50	190															158	174																																																																																																																						
60	164															121	144																																																																																																																						
70	137															72	114																																																																																																																						
80	105															33	83																																																																																																																						
90	58																39																																																																																																																						
100	34																14																																																																																																																						
110	10																																																																																																																																						
120																																																																																																																																							
130																																																																																																																																							
140																																																																																																																																							
150																																																																																																																																							
160																																																																																																																																							
170																																																																																																																																							
180																																																																																																																																							