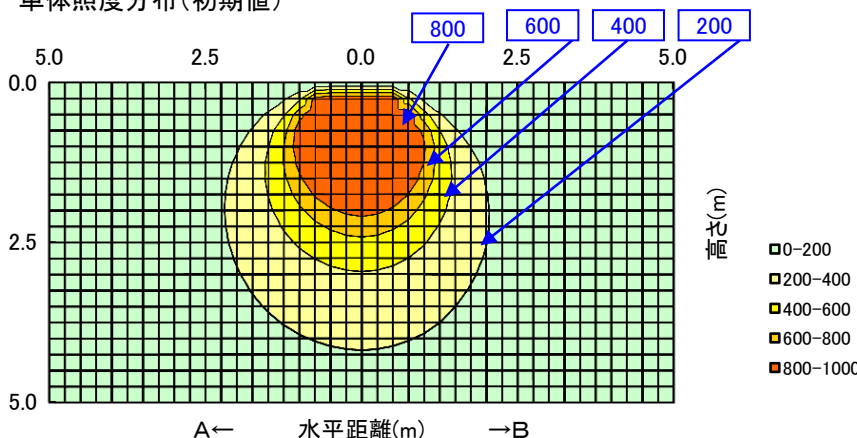
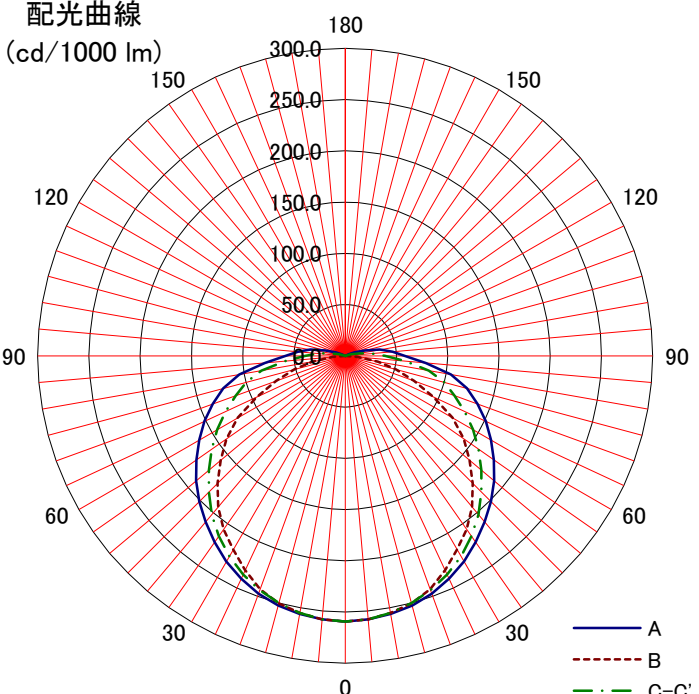


日立照明器具 照明特性

名称:直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%													
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%													
		床	10%														0%												
形式:PKE11208-XM24E	室指数	照明率 S/H=1.0																											
<備考>	0.6	0.51	0.40	0.32	0.50	0.39	0.32	0.26	0.37	0.31	0.26	0.36	0.30	0.26	0.24														
	0.8	0.60	0.49	0.41	0.58	0.48	0.40	0.35	0.46	0.39	0.34	0.44	0.38	0.34	0.31														
姿図 	1	0.66	0.55	0.47	0.64	0.54	0.46	0.41	0.52	0.45	0.40	0.50	0.44	0.40	0.37														
	1.25	0.71	0.61	0.54	0.70	0.60	0.53	0.47	0.58	0.52	0.46	0.56	0.50	0.46	0.43														
	1.5	0.76	0.66	0.59	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.60	0.55	0.51	0.48														
	2	0.81	0.73	0.67	0.79	0.72	0.66	0.61	0.69	0.64	0.59	0.67	0.62	0.58	0.55														
	2.5	0.85	0.78	0.72	0.83	0.76	0.71	0.66	0.73	0.69	0.64	0.71	0.67	0.63	0.60														
	3	0.87	0.81	0.75	0.85	0.79	0.74	0.70	0.76	0.72	0.68	0.74	0.70	0.67	0.63														
	4	0.90	0.85	0.80	0.88	0.83	0.79	0.75	0.81	0.77	0.74	0.78	0.75	0.72	0.68														
光源	4	0.90	0.85	0.80	0.88	0.83	0.79	0.75	0.81	0.77	0.74	0.78	0.75	0.72	0.68														
品名 直管形LEDランプ	5	0.92	0.88	0.84	0.90	0.86	0.83	0.79	0.83	0.80	0.78	0.81	0.78	0.76	0.72														
形式 LDK110SS-D/42/67NE	7	0.95	0.92	0.89	0.93	0.90	0.87	0.85	0.87	0.85	0.83	0.84	0.82	0.80	0.77														
光束 13,460 lm	10	0.97	0.95	0.92	0.95	0.93	0.91	0.89	0.90	0.88	0.87	0.87	0.86	0.85	0.81														
器具効率 Ft= 94.4%		単体照度分布(初期値) 																											
上方光束 Fu= 3.6%																													
下方光束 Fd= 90.8%																													
最大取付間隔																													
A-A 1.34 H																													
B-B 1.26 H																													
保守率	良	0.86	配光曲線 (cd/1000 lm) 																										
	中	0.81																											
	否	0.72																											
光度 (cd/1000 lm)																													
	A-0	B-B															C-0	A'-0	C'-0										
0	260	260															260												
10	256	255	255																										
20	247	242	243																										
30	232	219	226																										
40	212	193	202																										
50	190	158	174																										
60	164	121	144																										
70	137	72	114																										
80	105	33	83																										
90	58		39																										
100	34		14																										
110	10																												
120																													
130																													
140																													
150																													
160																													
170																													
180																													