

日立照明器具 照明特性


名称:直管形LED搭載器具	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式:PKE11208-XM24E	室指数	照明率 S/H=1.0														
＜備考＞	0.6	0.51	0.40	0.32	0.50	0.39	0.32	0.26	0.37	0.31	0.26	0.36	0.30	0.26	0.24	
	0.8	0.60	0.49	0.41	0.58	0.48	0.40	0.35	0.46	0.39	0.34	0.44	0.38	0.34	0.31	
姿図 	1	0.66	0.55	0.47	0.64	0.54	0.46	0.41	0.52	0.45	0.40	0.50	0.44	0.40	0.37	
	1.25	0.71	0.61	0.54	0.70	0.60	0.53	0.47	0.58	0.52	0.46	0.56	0.50	0.46	0.43	
	1.5	0.76	0.66	0.59	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.60	0.55	0.51	0.48	
	2	0.81	0.73	0.67	0.79	0.72	0.66	0.61	0.69	0.64	0.59	0.67	0.62	0.58	0.55	
	2.5	0.85	0.78	0.72	0.83	0.76	0.71	0.66	0.73	0.69	0.64	0.71	0.67	0.63	0.60	
	3	0.87	0.81	0.75	0.85	0.79	0.74	0.70	0.76	0.72	0.68	0.74	0.70	0.67	0.63	
	4	0.90	0.85	0.80	0.88	0.83	0.79	0.75	0.81	0.77	0.74	0.78	0.75	0.72	0.68	
光源	4	0.90	0.85	0.80	0.88	0.83	0.79	0.75	0.81	0.77	0.74	0.78	0.75	0.72	0.68	
品名:直管形LEDランプ [®]	5	0.92	0.88	0.84	0.90	0.86	0.83	0.79	0.83	0.80	0.78	0.81	0.78	0.76	0.72	
形式:LDK110SS-N/42/69NE	7	0.95	0.92	0.89	0.93	0.90	0.87	0.85	0.87	0.85	0.83	0.84	0.82	0.80	0.77	
光束:13,900 lm	10	0.97	0.95	0.92	0.95	0.93	0.91	0.89	0.90	0.88	0.87	0.87	0.86	0.85	0.81	

器具効率 Ft= 94.4%
 上方光束 Fu= 3.6%
 下方光束 Fd= 90.8%

最大取付間隔		
A-A	1.34	H
B-B	1.26	H
保守率	良	0.86
	中	0.81
	否	0.72

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	260	260	260		
10	256	255	255		
20	247	242	243		
30	232	219	226		
40	212	193	202		
50	190	158	174		
60	164	121	144		
70	137	72	114		
80	105	33	83		
90	58		39		
100	34		14		
110	10				
120					
130					
140					
150					
160					
170					
180					

単体照度分布 (初期値)

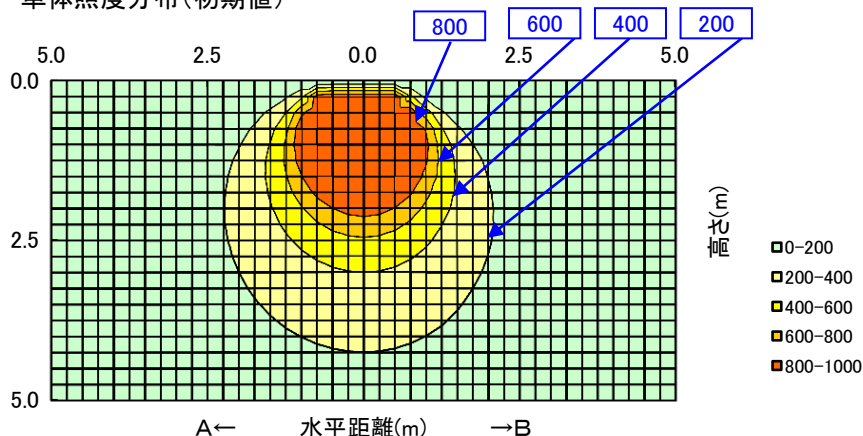

配光曲線
(cd/1000 lm)

