

日立照明器具 照明特性

形式: PM2190AS-G	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
		室指数	照明率 S/H=1.0													
姿図 		0.6	0.45	0.33	0.26	0.42	0.32	0.25	0.20	0.29	0.23	0.19	0.26	0.21	0.17	0.14
		0.8	0.52	0.41	0.33	0.50	0.39	0.32	0.27	0.36	0.30	0.25	0.33	0.27	0.23	0.19
		1	0.58	0.47	0.39	0.55	0.45	0.38	0.32	0.41	0.35	0.30	0.37	0.32	0.28	0.23
		1.25	0.63	0.53	0.45	0.60	0.50	0.43	0.38	0.46	0.40	0.35	0.42	0.37	0.33	0.27
		1.5	0.67	0.57	0.50	0.63	0.55	0.48	0.43	0.50	0.44	0.40	0.45	0.41	0.37	0.31
		2	0.72	0.64	0.57	0.68	0.61	0.55	0.50	0.56	0.51	0.46	0.50	0.46	0.43	0.36
		2.5	0.75	0.68	0.62	0.72	0.65	0.60	0.55	0.59	0.55	0.51	0.54	0.50	0.47	0.40
		3	0.78	0.71	0.66	0.74	0.68	0.63	0.58	0.62	0.58	0.54	0.57	0.53	0.50	0.43
	光源	4	0.81	0.75	0.71	0.77	0.72	0.68	0.64	0.66	0.62	0.59	0.60	0.57	0.55	0.47
	品名 蛍光ランプ	5	0.83	0.78	0.74	0.79	0.75	0.71	0.68	0.69	0.66	0.63	0.63	0.60	0.58	0.50
形式 FL20SSW/18		7	0.85	0.82	0.79	0.82	0.79	0.76	0.73	0.72	0.70	0.67	0.66	0.64	0.62	0.54
光束 1,230 lm		10	0.88	0.85	0.83	0.84	0.82	0.79	0.77	0.75	0.73	0.72	0.69	0.67	0.66	0.57

器具効率 Ft= 90.1%

上方光束 Fu= 22.6%

下方光束 Fd= 67.5%

配光分類

BZ-

最大取付間隔

A-A 1.56 H


B-B 1.28 H

保守率	良	0.74
	中	0.70
	否	0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	147	147	147
10	147	147	147
20	147	138	143
30	147	125	139
40	149	107	132
50	150	85	126
60	147	61	117
70	137	35	105
80	123	12	86
90	114		75
100	115		78
110	109		62
120	79		38
130	47		16
140	18		
150			
160			
170			
180			

単体照度分布(初期)

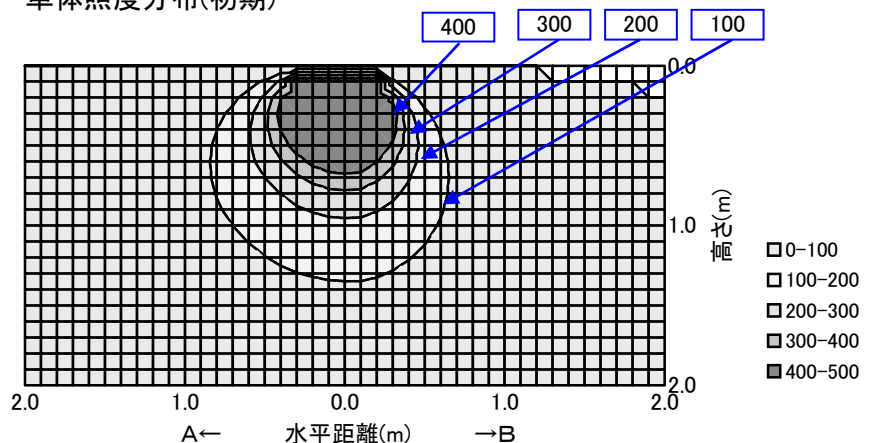

配光曲線

