
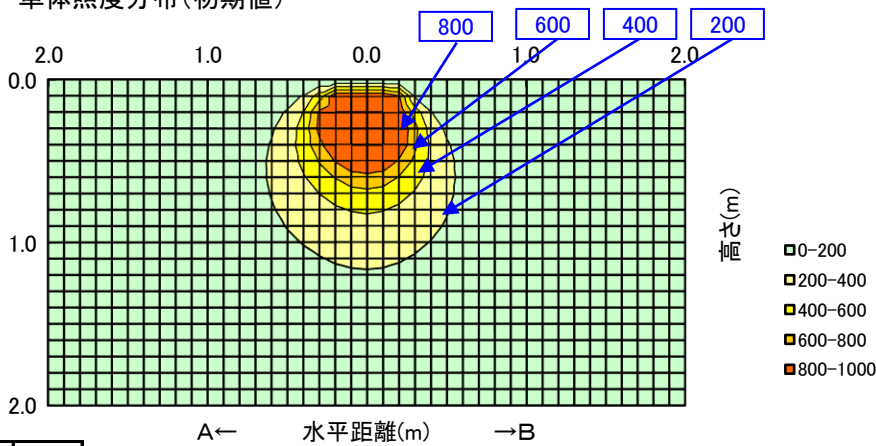
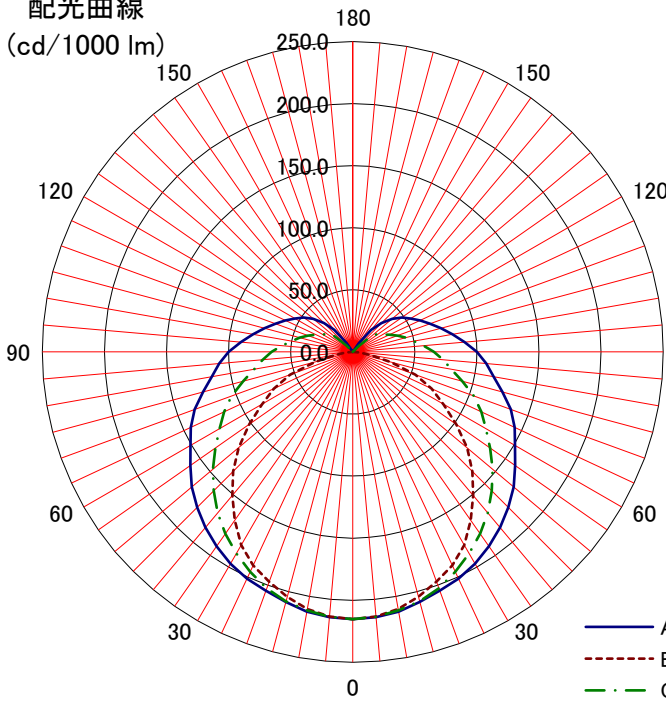


日立照明器具 照明特性																
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
形式: PME2105-J14A	室指数	照明率 S/H=1.0														
〈備考〉	0.6	0.50	0.38	0.30	0.48	0.37	0.30	0.25	0.34	0.28	0.24	0.32	0.27	0.23	0.20	
	0.8	0.58	0.47	0.39	0.56	0.45	0.38	0.32	0.42	0.36	0.31	0.39	0.34	0.30	0.26	
姿図 	1	0.64	0.53	0.45	0.61	0.51	0.44	0.38	0.48	0.41	0.36	0.45	0.39	0.35	0.31	
	1.25	0.70	0.59	0.52	0.67	0.57	0.50	0.44	0.53	0.47	0.42	0.50	0.45	0.40	0.36	
	1.5	0.74	0.64	0.57	0.71	0.62	0.55	0.50	0.58	0.52	0.47	0.54	0.49	0.45	0.40	
	2	0.79	0.71	0.64	0.76	0.69	0.62	0.57	0.64	0.59	0.54	0.60	0.55	0.52	0.46	
	2.5	0.83	0.75	0.69	0.79	0.73	0.67	0.62	0.68	0.63	0.59	0.63	0.59	0.56	0.50	
	3	0.85	0.78	0.73	0.82	0.76	0.71	0.66	0.71	0.66	0.63	0.66	0.63	0.59	0.53	
	4	0.88	0.83	0.78	0.85	0.80	0.76	0.72	0.75	0.71	0.68	0.70	0.67	0.64	0.58	
光源	5	0.90	0.86	0.82	0.87	0.83	0.79	0.76	0.78	0.75	0.72	0.73	0.70	0.68	0.61	
品名 直管形LEDランプ	7	0.93	0.89	0.86	0.90	0.87	0.84	0.81	0.81	0.79	0.77	0.76	0.74	0.72	0.65	
形式 LDK20SS・D/10/12NA	10	0.95	0.93	0.90	0.92	0.90	0.88	0.85	0.84	0.82	0.81	0.79	0.78	0.76	0.69	
光束 1,260 lm																
器具効率 Ft= 95.6%		単体照度分布(初期値) 														
上方光束 Fu= 16.3%																
下方光束 Fd= 79.2%																
最大取付間隔																
A-A 1.38 H																
B-B 1.24 H																
保守率	良	0.88														
	中	0.86														
	否	0.81														
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 														
	A-0	B-B	C-0	A'-0	C'-0											
0	215	215	215													
10	212	210	211													
20	205	197	203													
30	197	180	187													
40	185	151	169													
50	169	120	147													
60	151	85	124													
70	136	54	104													
80	115	15	81													
90	100		65													
100	82		50													
110	66		38													
120	54		28													
130	41		20													
140	23															
150																
160																
170																
180																