
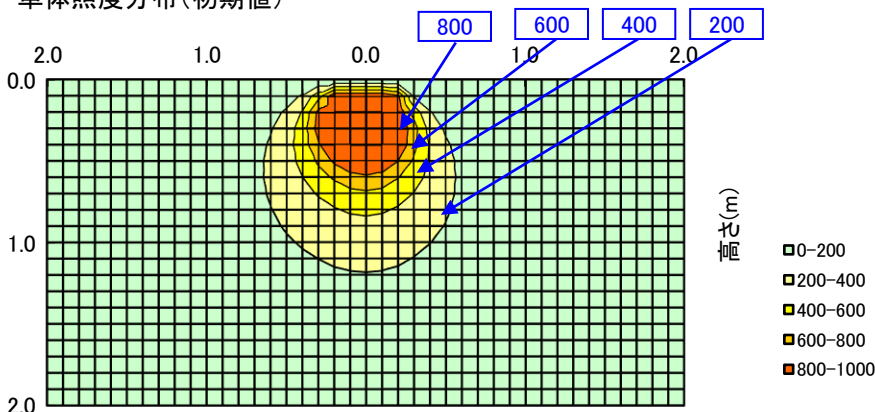
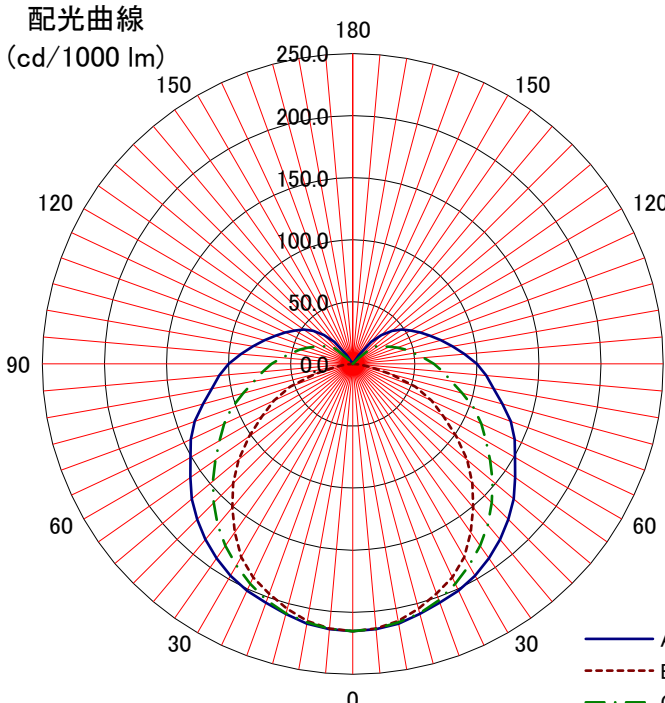


日立照明器具 照明特性																																																																																																																																						
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%																																																																																																																						
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																						
		床	10%													0%																																																																																																																						
形式: PME2105-J14A	室指数		照明率 S/H=1.0																																																																																																																																			
〈備考〉	0.6		0.50	0.38	0.30	0.48	0.37	0.30	0.25	0.34	0.28	0.24	0.32	0.27	0.23	0.20																																																																																																																						
	0.8		0.58	0.47	0.39	0.56	0.45	0.38	0.32	0.42	0.36	0.31	0.39	0.34	0.30	0.26																																																																																																																						
姿図 	1		0.64	0.53	0.45	0.61	0.51	0.44	0.38	0.48	0.41	0.36	0.45	0.39	0.35	0.31																																																																																																																						
	1.25		0.70	0.59	0.52	0.67	0.57	0.50	0.44	0.53	0.47	0.42	0.50	0.45	0.40	0.36																																																																																																																						
	1.5		0.74	0.64	0.57	0.71	0.62	0.55	0.50	0.58	0.52	0.47	0.54	0.49	0.45	0.40																																																																																																																						
	2		0.79	0.71	0.64	0.76	0.69	0.62	0.57	0.64	0.59	0.54	0.60	0.55	0.52	0.46																																																																																																																						
	2.5		0.83	0.75	0.69	0.79	0.73	0.67	0.62	0.68	0.63	0.59	0.63	0.59	0.56	0.50																																																																																																																						
	3		0.85	0.78	0.73	0.82	0.76	0.71	0.66	0.71	0.66	0.63	0.66	0.63	0.59	0.53																																																																																																																						
	4		0.88	0.83	0.78	0.85	0.80	0.76	0.72	0.75	0.71	0.68	0.70	0.67	0.64	0.58																																																																																																																						
光源	5		0.90	0.86	0.82	0.87	0.83	0.79	0.76	0.78	0.75	0.72	0.73	0.70	0.68	0.61																																																																																																																						
品名 直管形LEDランプ	7		0.93	0.89	0.86	0.90	0.87	0.84	0.81	0.81	0.79	0.77	0.76	0.74	0.72	0.65																																																																																																																						
形式 LDK20SS・N/10/13NA	10		0.95	0.93	0.90	0.92	0.90	0.88	0.85	0.84	0.82	0.81	0.79	0.78	0.76	0.69																																																																																																																						
光束 1,300 lm																																																																																																																																						
器具効率 Ft= 95.6%			単体照度分布(初期値) 																																																																																																																																			
上方光束 Fu= 16.3%																																																																																																																																						
下方光束 Fd= 79.2%																																																																																																																																						
最大取付間隔			配光曲線 (cd/1000 lm) 																																																																																																																																			
A-A 1.38 H																																																																																																																																						
B-B 1.24 H																																																																																																																																						
保守率																																																																																																																																						
良 0.88			光度 (cd/1000 lm) <table><thead><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr></thead><tbody><tr><td>0</td><td>215</td><td>215</td><td>215</td><td></td><td></td></tr><tr><td>10</td><td>212</td><td>210</td><td>211</td><td></td><td></td></tr><tr><td>20</td><td>205</td><td>197</td><td>203</td><td></td><td></td></tr><tr><td>30</td><td>197</td><td>180</td><td>187</td><td></td><td></td></tr><tr><td>40</td><td>185</td><td>151</td><td>169</td><td></td><td></td></tr><tr><td>50</td><td>169</td><td>120</td><td>147</td><td></td><td></td></tr><tr><td>60</td><td>151</td><td>85</td><td>124</td><td></td><td></td></tr><tr><td>70</td><td>136</td><td>54</td><td>104</td><td></td><td></td></tr><tr><td>80</td><td>115</td><td>15</td><td>81</td><td></td><td></td></tr><tr><td>90</td><td>100</td><td></td><td>65</td><td></td><td></td></tr><tr><td>100</td><td>82</td><td></td><td>50</td><td></td><td></td></tr><tr><td>110</td><td>66</td><td></td><td>38</td><td></td><td></td></tr><tr><td>120</td><td>54</td><td></td><td>28</td><td></td><td></td></tr><tr><td>130</td><td>41</td><td></td><td>20</td><td></td><td></td></tr><tr><td>140</td><td>23</td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>													A-0	B-B	C-0	A'-0	C'-0	0	215	215	215			10	212	210	211			20	205	197	203			30	197	180	187			40	185	151	169			50	169	120	147			60	151	85	124			70	136	54	104			80	115	15	81			90	100		65			100	82		50			110	66		38			120	54		28			130	41		20			140	23					150						160						170						180					
	A-0	B-B													C-0	A'-0	C'-0																																																																																																																					
0	215	215													215																																																																																																																							
10	212	210													211																																																																																																																							
20	205	197													203																																																																																																																							
30	197	180													187																																																																																																																							
40	185	151													169																																																																																																																							
50	169	120													147																																																																																																																							
60	151	85													124																																																																																																																							
70	136	54													104																																																																																																																							
80	115	15													81																																																																																																																							
90	100														65																																																																																																																							
100	82		50																																																																																																																																			
110	66		38																																																																																																																																			
120	54		28																																																																																																																																			
130	41		20																																																																																																																																			
140	23																																																																																																																																					
150																																																																																																																																						
160																																																																																																																																						
170																																																																																																																																						
180																																																																																																																																						
中 0.86																																																																																																																																						
否 0.81																																																																																																																																						