
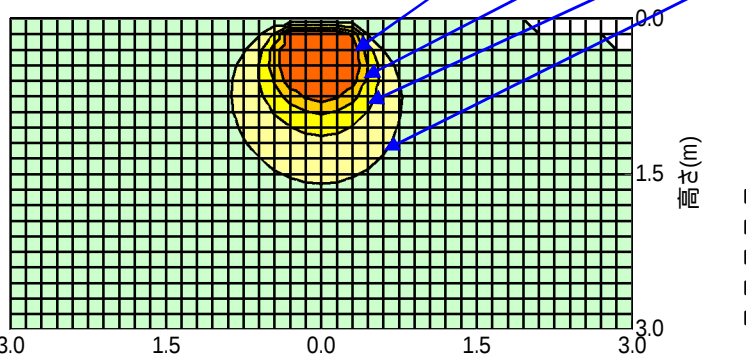
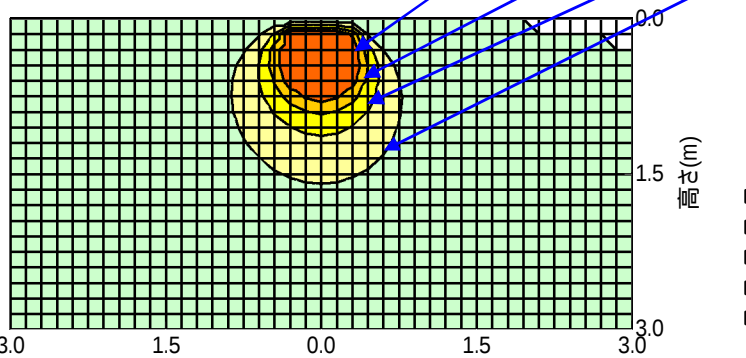
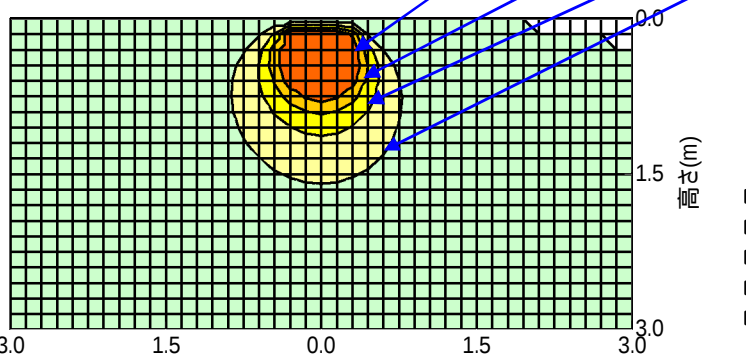
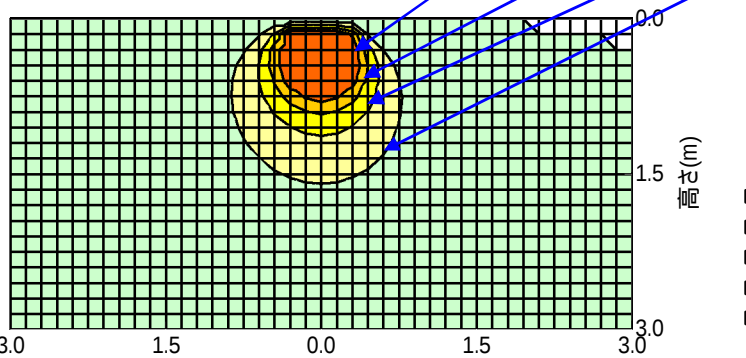


日立照明器具 照明特性


形式: PME4105-J14A		天井	80%			70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
		室指数	照明率 S/H=1.0																
	姿図	0.6	0.52	0.39	0.31	0.50	0.38	0.31	0.25	0.36	0.29	0.24	0.33	0.28	0.23	0.20			
	0.8	0.61	0.49	0.40	0.58	0.47	0.39	0.33	0.44	0.37	0.32	0.41	0.35	0.31	0.27				
	1	0.67	0.55	0.47	0.64	0.53	0.46	0.40	0.50	0.43	0.38	0.46	0.41	0.36	0.32				
	1.25	0.73	0.62	0.54	0.70	0.60	0.52	0.46	0.56	0.49	0.44	0.52	0.46	0.42	0.37				
	1.5	0.77	0.67	0.59	0.74	0.65	0.57	0.52	0.60	0.54	0.49	0.56	0.51	0.47	0.42				
	2	0.83	0.74	0.67	0.79	0.71	0.65	0.59	0.67	0.61	0.56	0.62	0.58	0.54	0.48				
	2.5	0.86	0.78	0.72	0.83	0.76	0.70	0.65	0.71	0.66	0.62	0.66	0.62	0.58	0.52				
	3	0.89	0.82	0.76	0.85	0.79	0.74	0.69	0.74	0.69	0.65	0.69	0.65	0.62	0.56				
光源		4	0.92	0.86	0.81	0.89	0.84	0.79	0.75	0.78	0.74	0.71	0.73	0.70	0.67	0.60			
品名	LED直管ランプ	5	0.94	0.89	0.85	0.91	0.87	0.83	0.79	0.81	0.78	0.75	0.76	0.73	0.71	0.64			
形式	LDK40SS-N/18/24	7	0.97	0.93	0.90	0.94	0.90	0.87	0.84	0.85	0.82	0.80	0.80	0.77	0.75	0.68			
器具光束	2,300 lm	10	0.99	0.97	0.94	0.96	0.94	0.91	0.89	0.88	0.86	0.84	0.83	0.81	0.80	0.72			
器具効率 Ft= 100.0%																			
上方光束 Fu= 17.0%																			
下方光束 Fd= 83.0%																			
配光分類																			
BZ-																			
最大取付間隔																			
A-A 1.38 H																			
B-B 1.28 H																			
保守率	良	0.86																	
	中	0.81																	
	否	0.72																	
光度 (cd/1000 lm)																			
	A-0	B-B															C-0	A'-0	C'-0
0	219	219															219		
10	217	216	217																
20	211	206	208																
30	201	187	194																
40	187	161	173																
50	173	134	155																
60	157	98	131																
70	137	60	108																
80	118	24	87																
90	101		69																
100	85		52																
110	69		41																
120	55		31																
130	39		17																
140	20		2																
150	1		1																
160	1		1																
170	1																		
180																			

単体照度分布(初期)

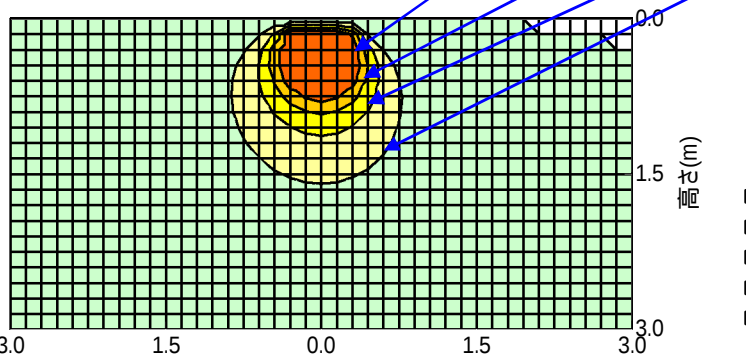

0-200
200-400
400-600
600-800
800-1000

配光曲線

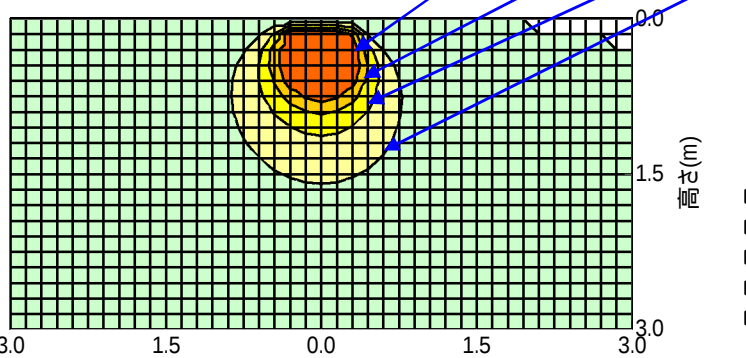

A
B
C-C'