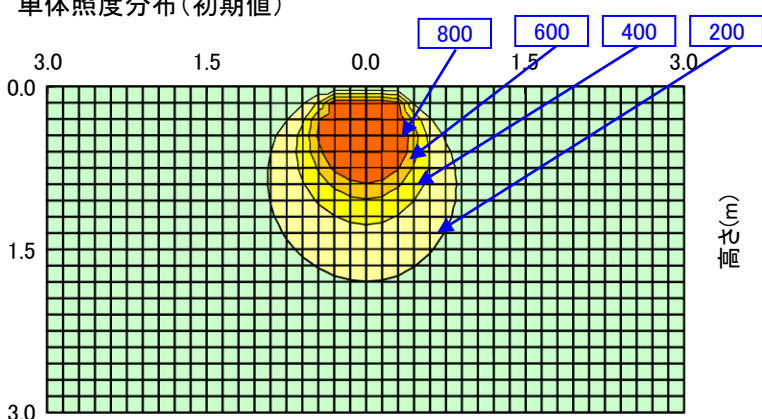
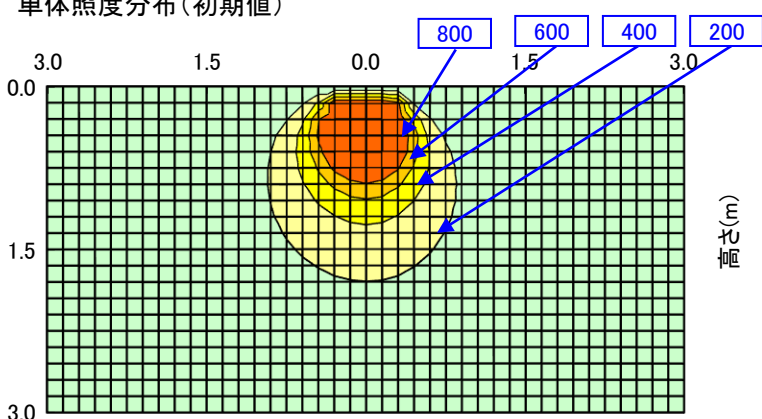
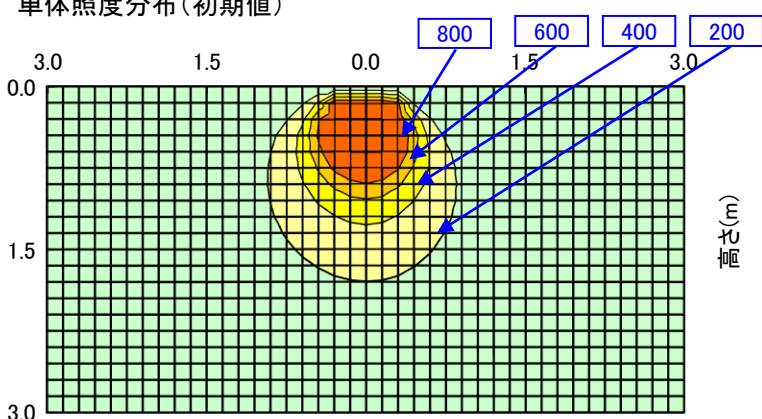
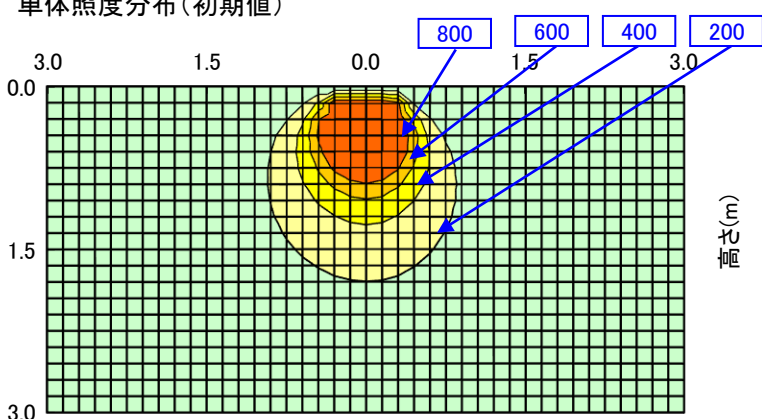


日立照明器具 照明特性																				
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%				
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
		床	10%													0%				
形式: PME4105-JM14AE	室指数	照明率 S/H=1.0																		
<備考>	0.6	0.51	0.39	0.32	0.49	0.38	0.31	0.26	0.36	0.30	0.25	0.34	0.29	0.25	0.22					
	0.8	0.59	0.48	0.40	0.57	0.47	0.39	0.34	0.44	0.38	0.33	0.42	0.36	0.32	0.29					
姿図 	1	0.65	0.54	0.46	0.63	0.53	0.46	0.40	0.50	0.44	0.39	0.47	0.42	0.37	0.34					
	1.25	0.70	0.60	0.53	0.68	0.59	0.52	0.46	0.55	0.49	0.45	0.52	0.47	0.43	0.39					
	1.5	0.74	0.65	0.58	0.72	0.63	0.57	0.52	0.60	0.54	0.50	0.57	0.52	0.48	0.44					
	2	0.80	0.72	0.65	0.77	0.70	0.64	0.59	0.66	0.61	0.57	0.62	0.58	0.55	0.50					
	2.5	0.83	0.76	0.70	0.80	0.74	0.69	0.64	0.70	0.65	0.61	0.66	0.62	0.59	0.54					
	3	0.85	0.79	0.74	0.82	0.77	0.72	0.68	0.73	0.69	0.65	0.69	0.65	0.62	0.57					
	4	0.88	0.83	0.79	0.86	0.81	0.77	0.73	0.77	0.73	0.70	0.73	0.70	0.67	0.62					
光源	5	0.90	0.86	0.82	0.88	0.84	0.80	0.77	0.79	0.76	0.74	0.75	0.73	0.71	0.65					
品名 直管形LEDランプ	7	0.93	0.90	0.87	0.90	0.87	0.85	0.82	0.83	0.81	0.78	0.79	0.77	0.75	0.70					
形式 LDK40SS・D/17/26NE	10	0.95	0.93	0.90	0.92	0.90	0.88	0.86	0.86	0.84	0.83	0.82	0.80	0.79	0.73					
光束 2,620 lm																				
器具効率 Ft= 94.0%		単体照度分布(初期値) 																		
上方光束 Fu= 11.4%																				
下方光束 Fd= 82.6%																				
最大取付間隔		配光曲線 																		
A-A 1.32 H																				
B-B 1.24 H																				
保守率	良	0.88	配光曲線 																	
	中	0.86																		
	否	0.81																		
光度 (cd/1000 lm)		配光曲線 																		
	A-0																B-B	C-0	A'-0	C'-0
0	247																247	247		
10	242																242	242		
20	232	226	229																	
30	216	202	209																	
40	197	173	184																	
50	173	136	155																	
60	152	97	126																	
70	125	58	99																	
80	100	20	73																	
90	79		53																	
100	61		37																	
110	45		25																	
120	34		17																	
130	24		12																	
140	15		2																	
150	2																			
160	1																			
170																				
180																				