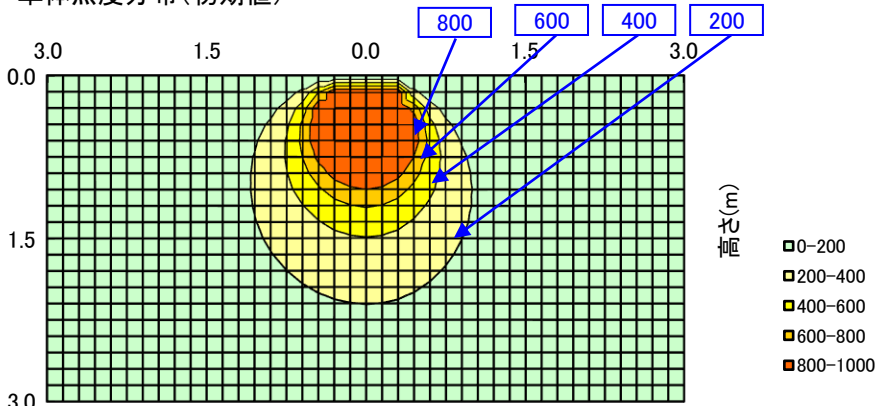
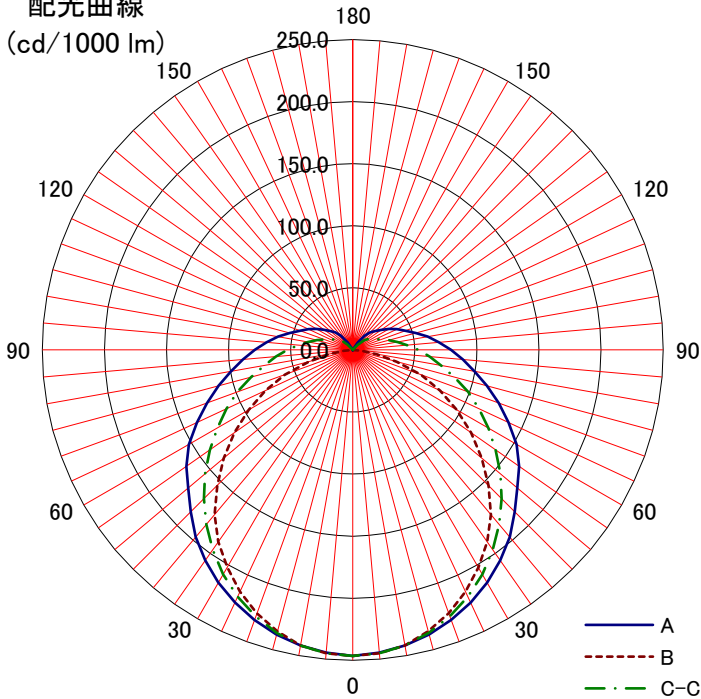


日立照明器具 照明特性																
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: PME4105-JM14AE	室指数	照明率 S/H=1.0														
<備考>	0.6	0.51	0.39	0.32	0.49	0.38	0.31	0.26	0.36	0.30	0.25	0.34	0.29	0.25	0.22	
	0.8	0.59	0.48	0.40	0.57	0.47	0.39	0.34	0.44	0.38	0.33	0.42	0.36	0.32	0.29	
姿図 	1	0.65	0.54	0.46	0.63	0.53	0.46	0.40	0.50	0.44	0.39	0.47	0.42	0.37	0.34	
	1.25	0.70	0.60	0.53	0.68	0.59	0.52	0.46	0.55	0.49	0.45	0.52	0.47	0.43	0.39	
	1.5	0.74	0.65	0.58	0.72	0.63	0.57	0.52	0.60	0.54	0.50	0.57	0.52	0.48	0.44	
	2	0.80	0.72	0.65	0.77	0.70	0.64	0.59	0.66	0.61	0.57	0.62	0.58	0.55	0.50	
	2.5	0.83	0.76	0.70	0.80	0.74	0.69	0.64	0.70	0.65	0.61	0.66	0.62	0.59	0.54	
	3	0.85	0.79	0.74	0.82	0.77	0.72	0.68	0.73	0.69	0.65	0.69	0.65	0.62	0.57	
光源	4	0.88	0.83	0.79	0.86	0.81	0.77	0.73	0.77	0.73	0.70	0.73	0.70	0.67	0.62	
品名 直管形LEDランプ	5	0.90	0.86	0.82	0.88	0.84	0.80	0.77	0.79	0.76	0.74	0.75	0.73	0.71	0.65	
形式 LDK40SS・N/22/36NE	7	0.93	0.90	0.87	0.90	0.87	0.85	0.82	0.83	0.81	0.78	0.79	0.77	0.75	0.70	
光束 3,600 lm	10	0.95	0.93	0.90	0.92	0.90	0.88	0.86	0.86	0.84	0.83	0.82	0.80	0.79	0.73	
器具効率 Ft= 94.0%		単体照度分布(初期値) 														
上方光束 Fu= 11.4%																
下方光束 Fd= 82.6%																
最大取付間隔		(E) 照度 ■ 0-200 ■ 200-400 ■ 400-600 ■ 600-800 ■ 800-1000														
A-A		1.32	H													
B-B		1.24	H													
保守率	良	0.88														
	中	0.86														
	否	0.81														
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 														
	A-0	B-B	C-0	A'-0	C'-0											
0	247	247	247													
10	242	242	242													
20	232	226	229													
30	216	202	209													
40	197	173	184													
50	173	136	155													
60	152	97	126													
70	125	58	99													
80	100	20	73													
90	79		53													
100	61		37													
110	45		25													
120	34		17													
130	24		12													
140	15		2													
150	2															
160	1															
170																
180																