


日立照明器具 照明特性

形式: PME4105-PK14		反 射 率	天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図 		0.6	0.52	0.39	0.31	0.50	0.38	0.31	0.25	0.36	0.29	0.24	0.33	0.28	0.23	0.20		
		0.8	0.61	0.49	0.40	0.58	0.47	0.39	0.33	0.44	0.37	0.32	0.41	0.35	0.31	0.27		
		1	0.67	0.55	0.47	0.64	0.53	0.46	0.40	0.50	0.43	0.38	0.46	0.41	0.36	0.32		
		1.25	0.73	0.62	0.54	0.70	0.60	0.52	0.46	0.56	0.49	0.44	0.52	0.46	0.42	0.37		
		1.5	0.77	0.67	0.59	0.74	0.65	0.57	0.52	0.60	0.54	0.49	0.56	0.51	0.47	0.42		
		2	0.83	0.74	0.67	0.79	0.71	0.65	0.59	0.67	0.61	0.56	0.62	0.58	0.54	0.48		
		2.5	0.86	0.78	0.72	0.83	0.76	0.70	0.65	0.71	0.66	0.62	0.66	0.62	0.58	0.52		
		3	0.89	0.82	0.76	0.85	0.79	0.74	0.69	0.74	0.69	0.65	0.69	0.65	0.62	0.56		
光 源		4	0.92	0.86	0.81	0.89	0.84	0.79	0.75	0.78	0.74	0.71	0.73	0.70	0.67	0.60		
品名	LED直管ランプ	5	0.94	0.89	0.85	0.91	0.87	0.83	0.79	0.81	0.78	0.75	0.76	0.73	0.71	0.64		
形式	LDK40SS N/26L/24	7	0.97	0.93	0.90	0.94	0.90	0.87	0.84	0.85	0.82	0.80	0.80	0.77	0.75	0.68		
器具光束	2,300 lm	10	0.99	0.97	0.94	0.96	0.94	0.91	0.89	0.88	0.86	0.84	0.83	0.81	0.80	0.72		

器具効率 Ft= 100.0%		
上方光束 Fu= 17.0%		
下方光束 Fd= 83.0%		
配光分類		
BZ-		
最大取付間隔		
A-A	1.38	H
B-B	1.28	H
保守率	良	0.78
	中	0.74
	否	0.66

単体照度分布(初期)

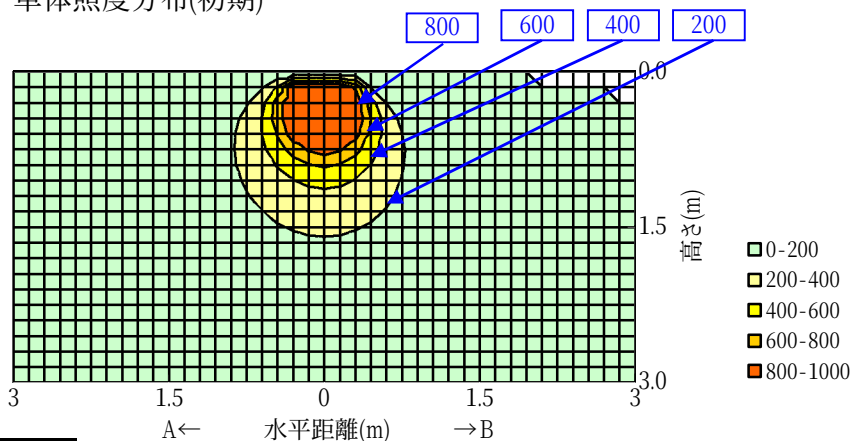

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	219	219	219		
10	217	216	217		
20	211	206	208		
30	201	187	194		
40	187	161	173		
50	173	134	155		
60	157	98	131		
70	137	60	108		
80	118	24	87		
90	101		69		
100	85		52		
110	69		41		
120	55		31		
130	39		17		
140	20		2		
150	1		1		
160	1		1		
170	1				
180					

配光曲線

