
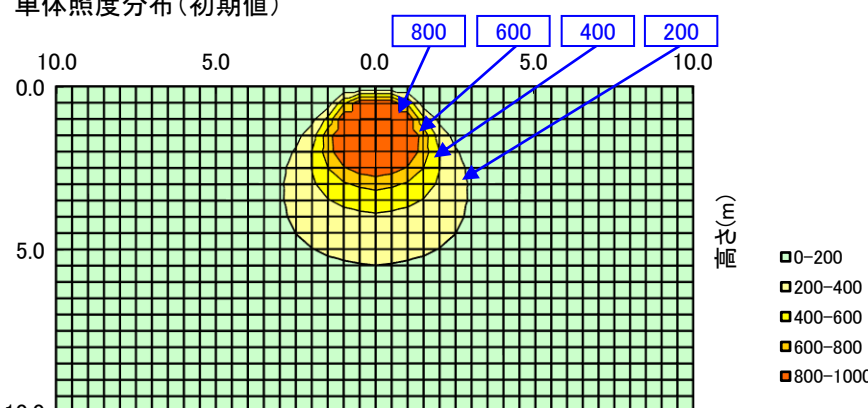
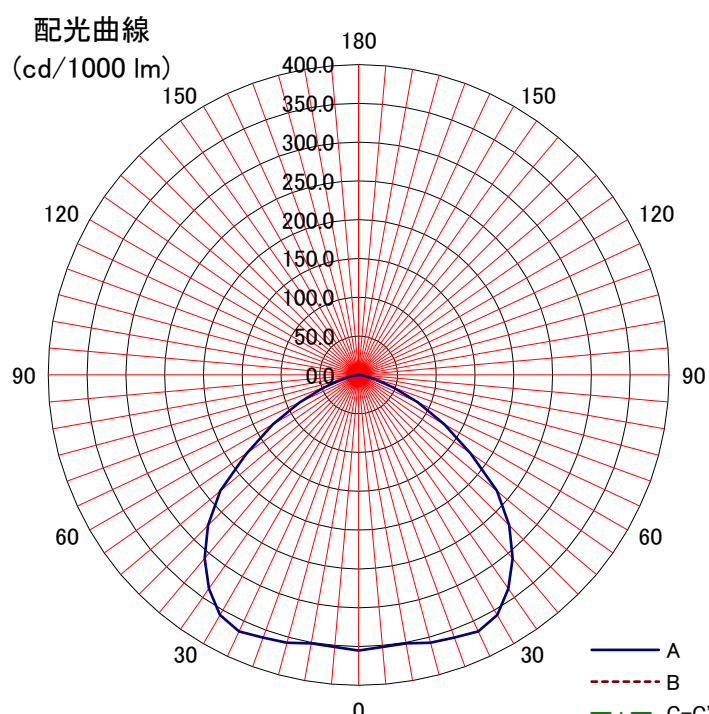


日立照明器具 照明特性																	
名称: 高天井用LEDランプ (アームタイプ)	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
	形式: RBME16AMNC1	床	10%														0%
姿図 	室指数	固有照明率 S/H=1.0															
	0.6	0.61	0.49	0.42	0.60	0.49	0.42	0.37	0.48	0.42	0.37	0.47	0.41	0.37	0.35		
	0.8	0.71	0.61	0.54	0.70	0.60	0.53	0.48	0.59	0.53	0.48	0.57	0.52	0.48	0.46		
	1	0.78	0.68	0.61	0.76	0.67	0.61	0.56	0.66	0.60	0.56	0.65	0.59	0.55	0.53		
	1.25	0.84	0.75	0.69	0.82	0.74	0.68	0.64	0.73	0.67	0.63	0.71	0.66	0.63	0.61		
	1.5	0.88	0.80	0.75	0.86	0.79	0.74	0.70	0.78	0.73	0.69	0.76	0.72	0.68	0.66		
	2	0.93	0.87	0.82	0.92	0.86	0.81	0.78	0.84	0.80	0.77	0.82	0.79	0.76	0.74		
	2.5	0.96	0.91	0.87	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.78		
	3	0.98	0.93	0.90	0.96	0.92	0.89	0.86	0.90	0.87	0.85	0.88	0.86	0.83	0.81		
	光源形式	4	1.00	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85	
-	5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88		
器具光束 17,000 lm	7	1.04	1.02	1.00	1.03	1.01	0.99	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92		
	10	1.06	1.05	1.03	1.05	1.04	1.02	1.01	1.01	1.00	1.00	0.99	0.99	0.98	0.95		
器具効率 Ft= 100%		単体照度分布(初期値) 															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔		配光曲線 (cd/1000 lm) 															
A-A 1.46 H																	
B-B H																	
保守率	良	0.81															
	中	0.79															
	否	0.75															
光度 (cd/1000 lm)		A-0	B-B	C-0	A'-0	C'-0											
	0	355															
	10	351															
	20	360															
	30	357															
	40	309															
	50	233															
	60	127															
	70	49															
	80	7															
	90																
	100																
	110																
	120																
	130																
	140																
	150																
	160																
	170																
	180																