



日立照明器具 照明特性

名称: 高天井用LEDランプ (アームタイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: RCBME1101MNC	室指数	固有照明率 S/H=1.0														
＜備考＞ 	0.6	0.62	0.50	0.43	0.61	0.50	0.43	0.38	0.49	0.43	0.38	0.48	0.42	0.38	0.36	
	0.8	0.72	0.62	0.55	0.71	0.61	0.55	0.50	0.60	0.54	0.49	0.59	0.53	0.49	0.47	
	1	0.79	0.69	0.63	0.77	0.69	0.62	0.58	0.67	0.62	0.57	0.66	0.61	0.57	0.55	
	1.25	0.85	0.76	0.70	0.83	0.75	0.70	0.65	0.74	0.69	0.65	0.72	0.68	0.64	0.62	
	1.5	0.89	0.82	0.76	0.87	0.81	0.75	0.71	0.79	0.74	0.70	0.77	0.73	0.70	0.68	
	2	0.94	0.88	0.83	0.93	0.87	0.83	0.79	0.85	0.81	0.78	0.84	0.80	0.77	0.75	
	2.5	0.97	0.92	0.88	0.95	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79	
	3	0.99	0.94	0.91	0.97	0.93	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.85	0.82	
光源形式	4	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.95	0.92	0.90	0.93	0.91	0.89	0.86	
-	5	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89	
器具光束	7	1.05	1.03	1.01	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.98	0.97	0.96	0.93	
10,800 lm	10	1.07	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.99	0.96	

器具効率 Ft= 100%					
上方光束 Fu= 0%					
下方光束 Fd= 100%					
最大取付間隔					
A-A		1.50 H			
B-B		H			
保守率	良	0.81			
	中	0.79			
	否	0.75			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	363				
10	363				
20	374				
30	366				
40	331				
50	224				
60	123				
70	42				
80	3				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					


単体照度分布(初期値)

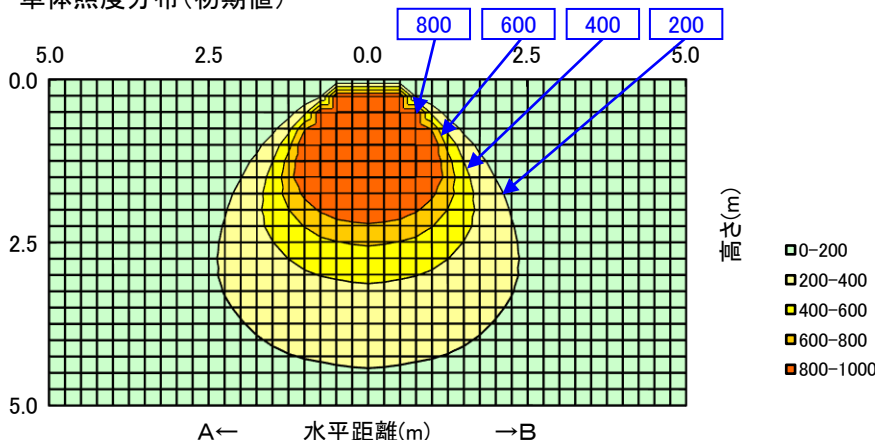

単位: (lx)

水平距離(m)

配光曲線
(cd/1000 lm)

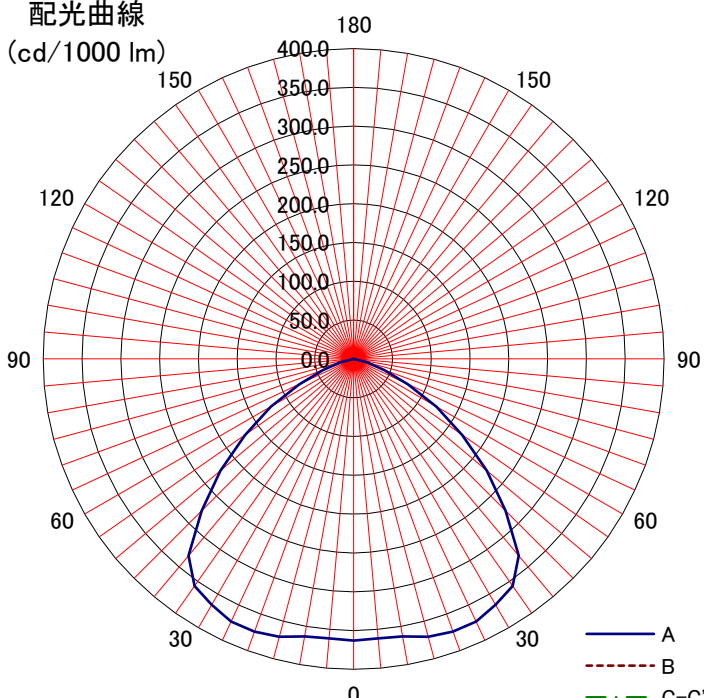

単位: (cd/1000 lm)

角度(°)