
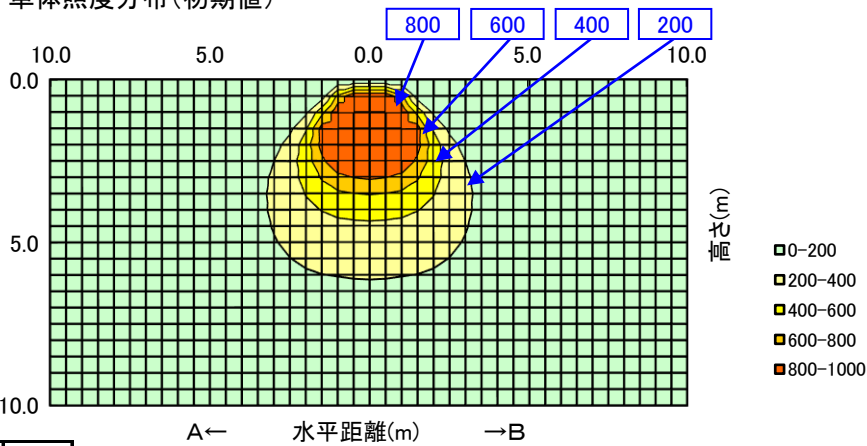
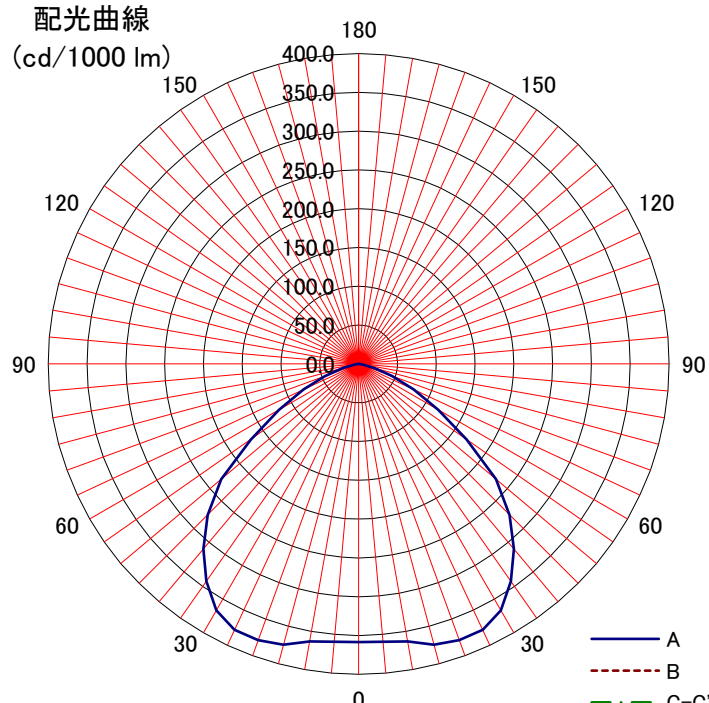


日立照明器具 照明特性																	
名称: 高天井用LEDランプ (アームタイプ)	反 射 率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%													0%	
形式: RCBME21AMNC1	室指数	固有照明率 S/H=1.0															
<備考>	0.6	0.62	0.50	0.43	0.60	0.50	0.43	0.38	0.49	0.43	0.38	0.48	0.42	0.38	0.36		
	0.8	0.72	0.62	0.55	0.71	0.61	0.54	0.49	0.60	0.54	0.49	0.59	0.53	0.49	0.47		
姿図 	1	0.78	0.69	0.62	0.77	0.68	0.62	0.57	0.67	0.61	0.57	0.66	0.61	0.57	0.55		
	1.25	0.84	0.76	0.70	0.83	0.75	0.69	0.65	0.73	0.68	0.64	0.72	0.67	0.64	0.62		
	1.5	0.88	0.81	0.75	0.87	0.80	0.75	0.71	0.78	0.74	0.70	0.77	0.73	0.69	0.67		
	2	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.81	0.78	0.83	0.80	0.77	0.75		
	2.5	0.96	0.91	0.87	0.95	0.90	0.86	0.83	0.88	0.85	0.82	0.87	0.84	0.81	0.79		
	3	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.82		
光源形式	4	1.01	0.97	0.94	0.99	0.96	0.93	0.91	0.94	0.92	0.90	0.92	0.90	0.88	0.86		
-	5	1.02	1.00	0.97	1.01	0.99	0.96	0.94	0.96	0.94	0.93	0.94	0.93	0.91	0.89		
器具光束	7	1.05	1.03	1.01	1.03	1.02	1.00	0.98	0.99	0.98	0.97	0.97	0.96	0.95	0.92		
21,000 lm	10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.98	0.95		
器具効率 Ft= 100%		単体照度分布(初期値) 															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔		配光曲線 (cd/1000 lm) 															
A-A 1.46 H																	
B-B H																	
保守率	良																0.81
	中																0.79
	否	0.75															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	358																
10	363																
20	379																
30	367																
40	311																
50	231																
60	118																
70	46																
80	6																
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	