



日立照明器具 照明特性

形式： SHM52321V-PK14 ハイスリムe5 〈初期照度補正機能付〉	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
		室指数	照明率 S/H=1.0													
	0.6	0.56	0.45	0.37	0.55	0.44	0.37	0.32	0.43	0.37	0.32	0.42	0.36	0.32	0.30	
	0.8	0.66	0.55	0.48	0.64	0.54	0.47	0.42	0.53	0.47	0.42	0.52	0.46	0.42	0.40	
	1	0.72	0.62	0.55	0.71	0.61	0.55	0.49	0.60	0.54	0.49	0.58	0.53	0.49	0.47	
	1.25	0.78	0.69	0.62	0.77	0.68	0.62	0.57	0.66	0.61	0.56	0.65	0.60	0.56	0.54	
	1.5	0.82	0.74	0.68	0.81	0.73	0.68	0.63	0.72	0.66	0.62	0.70	0.65	0.62	0.59	
	2	0.88	0.81	0.76	0.86	0.80	0.75	0.71	0.78	0.74	0.70	0.77	0.73	0.69	0.67	
	2.5	0.91	0.85	0.81	0.90	0.84	0.80	0.76	0.82	0.78	0.75	0.80	0.77	0.74	0.72	
	3	0.93	0.88	0.84	0.92	0.87	0.83	0.80	0.85	0.82	0.79	0.83	0.80	0.78	0.75	
光 源		4	0.96	0.92	0.89	0.95	0.91	0.88	0.85	0.89	0.86	0.84	0.87	0.84	0.82	0.80
品名	ハイスリムUV	5	0.98	0.95	0.92	0.96	0.93	0.91	0.88	0.91	0.89	0.87	0.89	0.87	0.86	0.83
形式	FHF45S・EN-V	7	1.00	0.98	0.96	0.99	0.97	0.95	0.93	0.95	0.93	0.91	0.92	0.91	0.90	0.87
光束	9,900 lm	10	1.02	1.00	0.99	1.00	0.99	0.98	0.97	0.97	0.96	0.95	0.95	0.94	0.93	0.90

器具効率 Ft= 96.4%			
上方光束 Fu= 0.0%			
下方光束 Fd= 96.4%			
配光分類			
BZ-			
最大取付間隔			
A-A		1.38	H
B-B		1.26	H
保守率	良	0.73	
	中	0.69	
	否	0.61	
光 度 (cd/1000 lm)			
	A-0	B-B	C-0
0	324	324	324
10	327	315	324
20	321	299	315
30	302	273	291
40	271	240	261
50	224	196	223
60	160	149	166
70	49	99	89
80	12	39	14
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

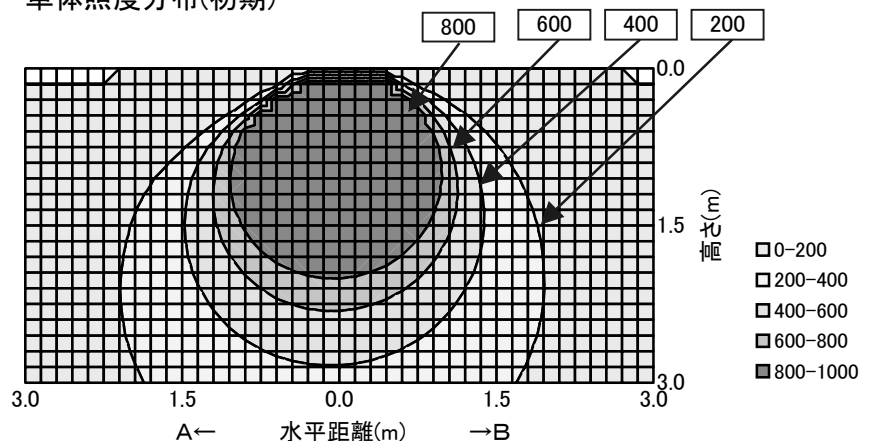

配光曲線

