


# 日立照明器具 照明特性

|                                                                                                 |  |          |             |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|-------------------------------------------------------------------------------------------------|--|----------|-------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 形式: TE32401L-JZU14A                                                                             |  | 天井       | 80%         |      |      | 70%  |      |      |      | 50%  |      |      | 30%  |      |      | 0%   |      |
| <高出力タイプ>                                                                                        |  | 壁        | 70%         | 50%  | 30%  | 70%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0%   |      |
| <電球色相当>                                                                                         |  | 床        | 10%         |      |      |      |      |      |      |      |      |      |      |      |      | 0%   |      |
| <初期照度補正、連続調光共用形>                                                                                |  | 室指数      | 照明率 S/H=1.0 |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| <div>姿図</div>  |  | 0.6      | 0.60        | 0.48 | 0.41 | 0.58 | 0.48 | 0.40 | 0.35 | 0.46 | 0.40 | 0.35 | 0.45 | 0.39 | 0.35 | 0.33 |      |
|                                                                                                 |  | 0.8      | 0.69        | 0.59 | 0.51 | 0.68 | 0.58 | 0.51 | 0.45 | 0.56 | 0.50 | 0.45 | 0.55 | 0.49 | 0.45 | 0.43 |      |
|                                                                                                 |  | 1        | 0.76        | 0.66 | 0.58 | 0.74 | 0.65 | 0.58 | 0.53 | 0.63 | 0.57 | 0.52 | 0.62 | 0.56 | 0.52 | 0.50 |      |
|                                                                                                 |  | 1.25     | 0.82        | 0.73 | 0.66 | 0.80 | 0.72 | 0.65 | 0.60 | 0.70 | 0.64 | 0.60 | 0.68 | 0.63 | 0.59 | 0.57 |      |
|                                                                                                 |  | 1.5      | 0.86        | 0.78 | 0.72 | 0.84 | 0.77 | 0.71 | 0.66 | 0.75 | 0.70 | 0.66 | 0.73 | 0.69 | 0.65 | 0.63 |      |
|                                                                                                 |  | 2        | 0.92        | 0.85 | 0.79 | 0.90 | 0.84 | 0.79 | 0.74 | 0.82 | 0.77 | 0.74 | 0.80 | 0.76 | 0.73 | 0.70 |      |
|                                                                                                 |  | 2.5      | 0.95        | 0.89 | 0.84 | 0.93 | 0.88 | 0.83 | 0.79 | 0.86 | 0.82 | 0.79 | 0.84 | 0.81 | 0.78 | 0.75 |      |
|                                                                                                 |  | 3        | 0.97        | 0.92 | 0.87 | 0.95 | 0.91 | 0.87 | 0.83 | 0.89 | 0.85 | 0.82 | 0.87 | 0.84 | 0.81 | 0.78 |      |
|                                                                                                 |  | 4        | 1.00        | 0.96 | 0.92 | 0.98 | 0.95 | 0.91 | 0.88 | 0.92 | 0.90 | 0.87 | 0.90 | 0.88 | 0.86 | 0.83 |      |
| 光源                                                                                              |  | 5        | 1.02        | 0.98 | 0.95 | 1.00 | 0.97 | 0.94 | 0.92 | 0.95 | 0.93 | 0.90 | 0.93 | 0.91 | 0.89 | 0.86 |      |
| 品名                                                                                              |  | LED      | 7           | 1.04 | 1.02 | 0.99 | 1.02 | 1.00 | 0.98 | 0.96 | 0.98 | 0.96 | 0.95 | 0.96 | 0.95 | 0.93 | 0.91 |
| 形式                                                                                              |  |          | 10          | 1.06 | 1.04 | 1.03 | 1.04 | 1.03 | 1.02 | 1.00 | 1.01 | 1.00 | 0.98 | 0.99 | 0.98 | 0.97 | 0.94 |
| 光束                                                                                              |  | 7,140 lm |             |      |      |      |      |      |      |      |      |      |      |      |      |      |      |

器具効率 Ft= 100.0%

上方光束 Fu= 0.0%

下方光束 Fd= 100.0%

配光分類

BZ-

最大取付間隔

A-A 1.30 H

B-B 1.20 H

保守率

良 0.86


中 0.81

否 0.72

光度 (cd/1000 lm)

|     |     |     |     |      |      |
|-----|-----|-----|-----|------|------|
|     | A-0 | B-B | C-0 | A'-0 | C'-0 |
| 0   | 375 | 375 | 375 |      |      |
| 10  | 368 | 366 | 368 |      |      |
| 20  | 355 | 342 | 349 |      |      |
| 30  | 329 | 302 | 318 |      |      |
| 40  | 277 | 248 | 271 |      |      |
| 50  | 224 | 191 | 217 |      |      |
| 60  | 163 | 142 | 145 |      |      |
| 70  | 85  | 71  | 84  |      |      |
| 80  | 31  | 22  | 25  |      |      |
| 90  |     |     |     |      |      |
| 100 |     |     |     |      |      |
| 110 |     |     |     |      |      |
| 120 |     |     |     |      |      |
| 130 |     |     |     |      |      |
| 140 |     |     |     |      |      |
| 150 |     |     |     |      |      |
| 160 |     |     |     |      |      |
| 170 |     |     |     |      |      |
| 180 |     |     |     |      |      |

単体照度分布(初期)

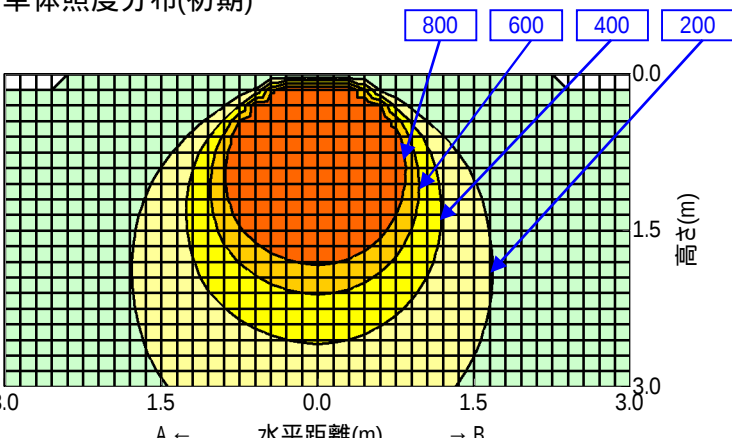

配光曲線

