



日立照明器具 照明特性

形式: TE32401L-JZU14 <高出力タイプ> <電球色相当> <照度補正、連続調光共用形>		天井	80%			70%				50%			30%			0%			
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
				床	10%														0%
					室指数	照明率 S/H=1.0													
		0.6	0.60	0.48	0.41	0.58	0.48	0.40	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33			
		0.8	0.69	0.59	0.51	0.68	0.58	0.51	0.45	0.56	0.50	0.45	0.55	0.49	0.45	0.43			
		1	0.76	0.66	0.58	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.62	0.56	0.52	0.50			
		1.25	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.70	0.64	0.60	0.68	0.63	0.59	0.57			
		1.5	0.86	0.78	0.72	0.84	0.77	0.71	0.66	0.75	0.70	0.66	0.73	0.69	0.65	0.63			
		2	0.92	0.85	0.79	0.90	0.84	0.79	0.74	0.82	0.77	0.74	0.80	0.76	0.73	0.70			
		2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.79	0.84	0.81	0.78	0.75			
		3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78			
光源		4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83			
品名	LED	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86			
形式		7	1.04	1.02	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91			
光束	7,140 lm	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.94			


器具効率 Ft= 100.0%					
上方光束 Fu= 0.0%					
下方光束 Fd= 100.0%					
配光分類					
BZ-					
最大取付間隔					
A-A		1.30	H		
B-B		1.20	H		
保守率	良	0.81			
	中	0.77			
	否	0.68			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	375	375	375		
10	368	366	368		
20	355	342	349		
30	329	302	318		
40	277	248	271		
50	224	191	217		
60	163	142	145		
70	85	71	84		
80	31	22	25		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

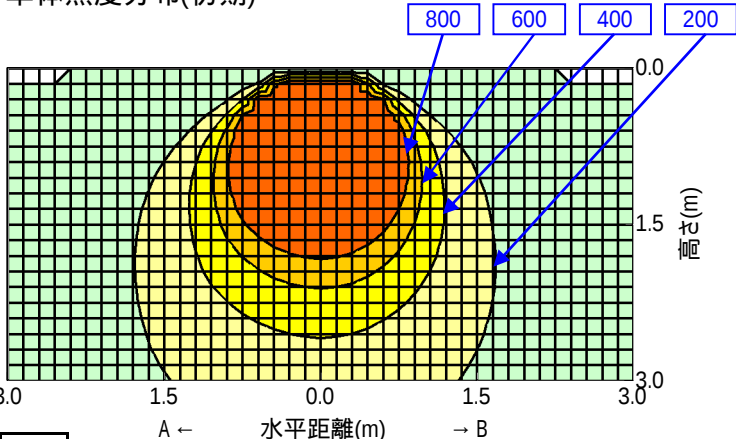


0-200
200-400
400-600
600-800
800-1000

配光曲線

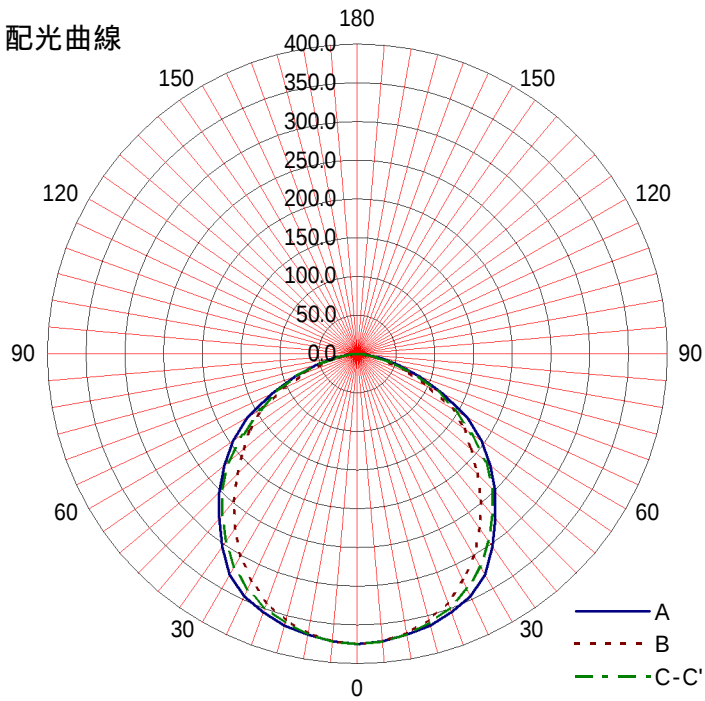

A
B
C-C'

単体照度分布(初期)

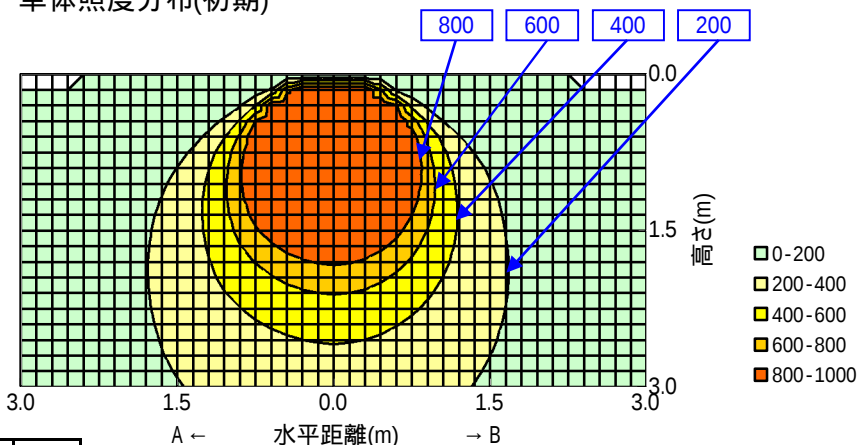

配光曲線

