
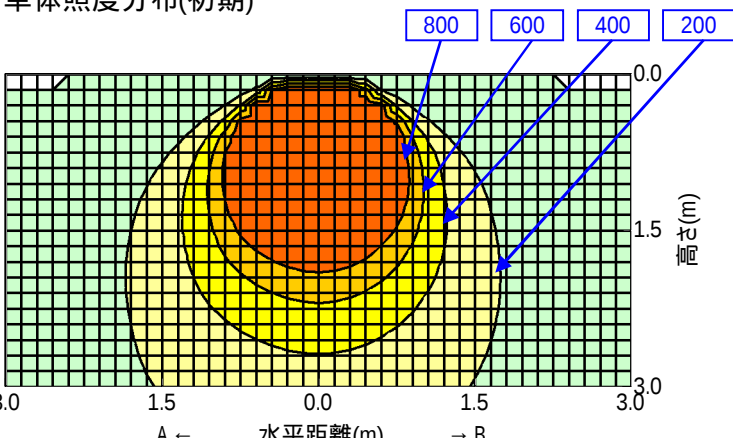
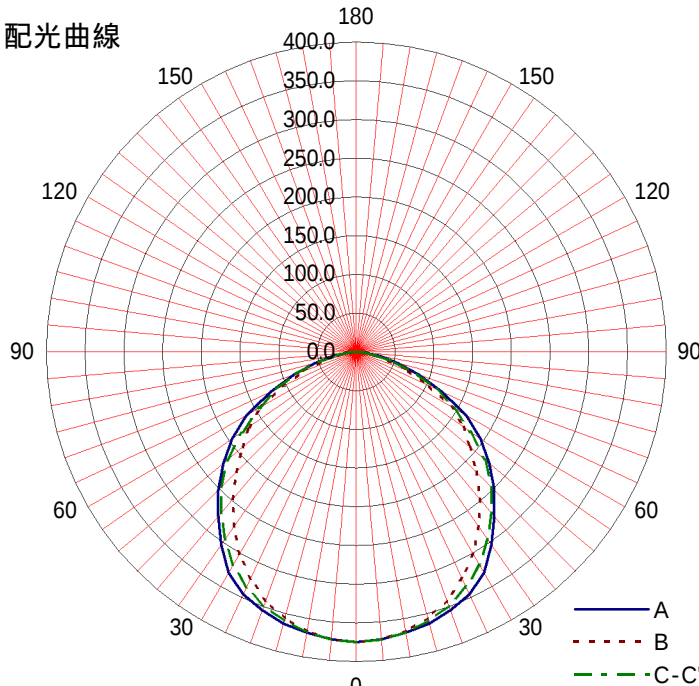


日立照明器具 照明特性

形式: TE32401W-JZU14A		反 射 率	天井	80%			70%				50%			30%			0%		
<高出力タイプ>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
<白色相当>			床	10%															0%
<初期照度補正、連続調光共用形>			室指数	照明率 S/H=1.0															
姿図 		0.6	0.60	0.48	0.41	0.58	0.48	0.40	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33			
		0.8	0.69	0.59	0.51	0.68	0.58	0.51	0.45	0.56	0.50	0.45	0.55	0.49	0.45	0.43			
		1	0.76	0.66	0.58	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.62	0.56	0.52	0.50			
		1.25	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.70	0.64	0.60	0.68	0.63	0.59	0.57			
		1.5	0.86	0.78	0.72	0.84	0.77	0.71	0.66	0.75	0.70	0.66	0.73	0.69	0.65	0.63			
		2	0.92	0.85	0.79	0.90	0.84	0.79	0.74	0.82	0.77	0.74	0.80	0.76	0.73	0.70			
		2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.79	0.84	0.81	0.78	0.75			
		3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78			
光源		4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83			
品名	LED	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86			
形式		7	1.04	1.02	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91			
光束	7,690 lm	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.94			

器具効率 Ft= 100.0%			単体照度分布(初期) 																
上方光束 Fu= 0.0%																			
下方光束 Fd= 100.0%																			
配光分類																			
BZ-																			
最大取付間隔																			
A-A 1.30 H																			
B-B 1.20 H																			
保守率	良	0.86																	
	中	0.81																	
	否	0.72																	
光度 (cd/1000 lm)			配光曲線 																
	A-0	B-B																	C-0
0	375	375																	375
10	368	366																	368
20	355	342																	349
30	329	302																	318
40	277	248																	271
50	224	191																	217
60	163	142																	145
70	85	71																	84
80	31	22																	25
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			