
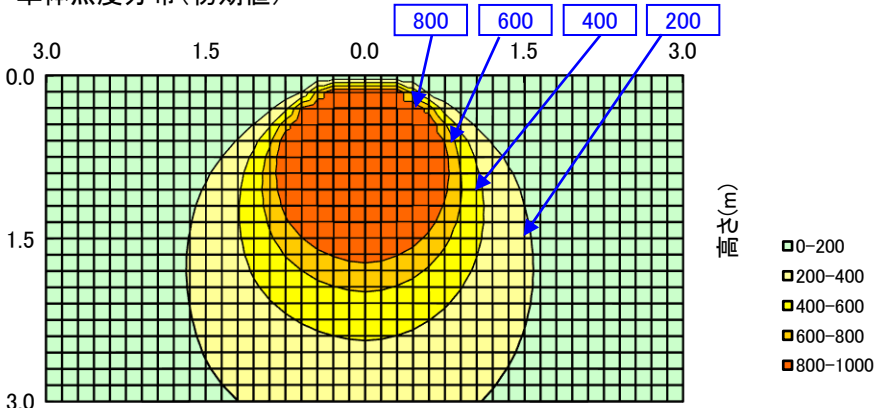
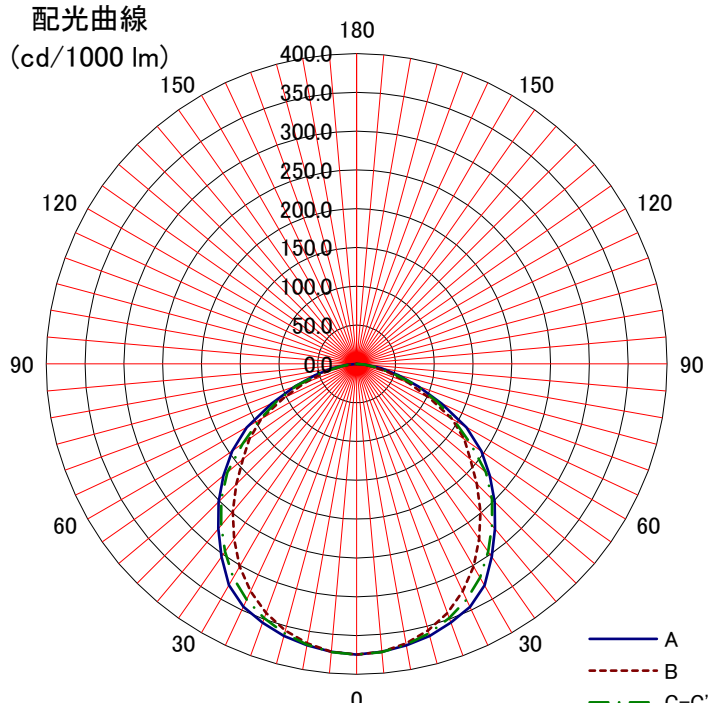


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%																																																																																																																							
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																							
		床	10%													0%																																																																																																																							
形式: TE324AD-JZ14A	室指数	固有照明率 S/H=1.0																																																																																																																																					
〈備考〉	0.6	0.60	0.48	0.41	0.58	0.48	0.40	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33																																																																																																																								
	0.8	0.69	0.59	0.51	0.68	0.58	0.51	0.45	0.56	0.50	0.45	0.55	0.49	0.45	0.43																																																																																																																								
姿図 	1	0.76	0.66	0.58	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.62	0.56	0.52	0.50																																																																																																																								
	1.25	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.70	0.64	0.60	0.68	0.63	0.59	0.57																																																																																																																								
	1.5	0.86	0.78	0.72	0.84	0.77	0.71	0.66	0.75	0.70	0.66	0.73	0.69	0.65	0.63																																																																																																																								
	2	0.92	0.85	0.79	0.90	0.84	0.79	0.74	0.82	0.77	0.74	0.80	0.76	0.73	0.70																																																																																																																								
	2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.79	0.84	0.81	0.78	0.75																																																																																																																								
	3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78																																																																																																																								
	4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83																																																																																																																								
光源形式	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86																																																																																																																								
器具光束 6,360 lm	7	1.04	1.02	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91																																																																																																																								
	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.94																																																																																																																								
器具効率 Ft= 100%		単体照度分布(初期値)  3.0 1.5 0.0 1.5 3.0 0.0 1.5 3.0 水平距離(m) 単位: m 0-200 200-400 400-600 600-800 800-1000																																																																																																																																					
上方光束 Fu= 0%																																																																																																																																							
下方光束 Fd= 100%																																																																																																																																							
最大取付間隔		配光曲線 (cd/1000 lm)  180 150 120 90 60 30 0 400.0 350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0 A B C-C'																																																																																																																																					
A-A 1.30 H																																																																																																																																							
B-B 1.20 H																																																																																																																																							
保守率																																																																																																																																							
良	0.86																																																																																																																																						
中	0.81																																																																																																																																						
否	0.72																																																																																																																																						
光度 (cd/1000 lm)		<table><tr><td></td><td>A-0</td><td>B-B</td><td>C-0</td><td>A'-0</td><td>C'-0</td></tr><tr><td>0</td><td>375</td><td>375</td><td>375</td><td></td><td></td></tr><tr><td>10</td><td>368</td><td>366</td><td>368</td><td></td><td></td></tr><tr><td>20</td><td>355</td><td>342</td><td>349</td><td></td><td></td></tr><tr><td>30</td><td>329</td><td>302</td><td>318</td><td></td><td></td></tr><tr><td>40</td><td>277</td><td>248</td><td>271</td><td></td><td></td></tr><tr><td>50</td><td>224</td><td>191</td><td>217</td><td></td><td></td></tr><tr><td>60</td><td>163</td><td>142</td><td>145</td><td></td><td></td></tr><tr><td>70</td><td>85</td><td>71</td><td>84</td><td></td><td></td></tr><tr><td>80</td><td>31</td><td>22</td><td>25</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>															A-0	B-B	C-0	A'-0	C'-0	0	375	375	375			10	368	366	368			20	355	342	349			30	329	302	318			40	277	248	271			50	224	191	217			60	163	142	145			70	85	71	84			80	31	22	25			90						100						110						120						130						140						150						160						170						180					
	A-0															B-B	C-0	A'-0	C'-0																																																																																																																				
0	375															375	375																																																																																																																						
10	368															366	368																																																																																																																						
20	355															342	349																																																																																																																						
30	329															302	318																																																																																																																						
40	277															248	271																																																																																																																						
50	224															191	217																																																																																																																						
60	163															142	145																																																																																																																						
70	85															71	84																																																																																																																						
80	31															22	25																																																																																																																						
90																																																																																																																																							
100																																																																																																																																							
110																																																																																																																																							
120																																																																																																																																							
130																																																																																																																																							
140																																																																																																																																							
150																																																																																																																																							
160																																																																																																																																							
170																																																																																																																																							
180																																																																																																																																							