
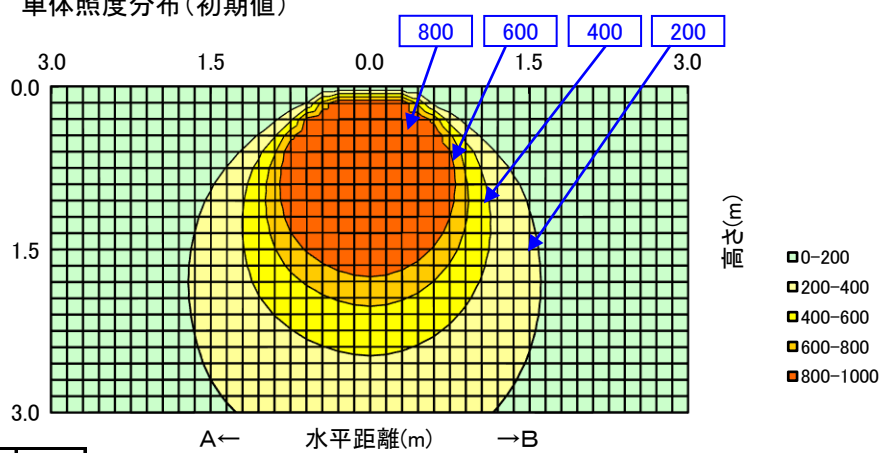
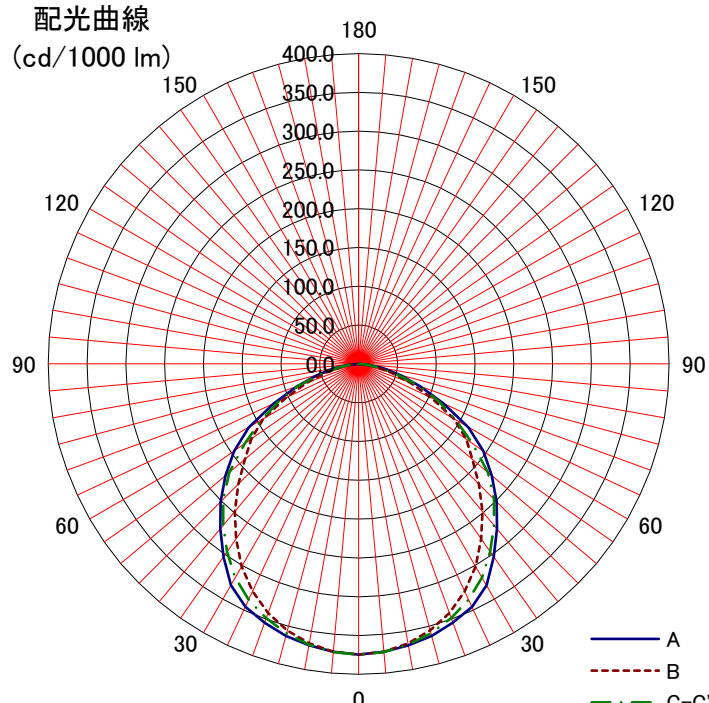


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%																																																																																																																								
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
		床	10%													0%																																																																																																																								
形式: TE324AN-JZ14A	室指数	固有照明率 S/H=1.0																																																																																																																																						
〈備考〉	0.6	0.60	0.48	0.41	0.58	0.48	0.40	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33																																																																																																																									
	0.8	0.69	0.59	0.51	0.68	0.58	0.51	0.45	0.56	0.50	0.45	0.55	0.49	0.45	0.43																																																																																																																									
姿図 	1	0.76	0.66	0.58	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.62	0.56	0.52	0.50																																																																																																																									
	1.25	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.70	0.64	0.60	0.68	0.63	0.59	0.57																																																																																																																									
	1.5	0.86	0.78	0.72	0.84	0.77	0.71	0.66	0.75	0.70	0.66	0.73	0.69	0.65	0.63																																																																																																																									
	2	0.92	0.85	0.79	0.90	0.84	0.79	0.74	0.82	0.77	0.74	0.80	0.76	0.73	0.70																																																																																																																									
	2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.79	0.84	0.81	0.78	0.75																																																																																																																									
	3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78																																																																																																																									
	4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83																																																																																																																									
光源形式	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86																																																																																																																									
器具光束 6,560 lm	7	1.04	1.02	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91																																																																																																																									
	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.94																																																																																																																									
器具効率 Ft= 100%		単体照度分布(初期値) 																																																																																																																																						
上方光束 Fu= 0%																																																																																																																																								
下方光束 Fd= 100%																																																																																																																																								
最大取付間隔		光度 (cd/1000 lm) <table><tr><td></td><td>A-0</td><td>B-B</td><td>C-0</td><td>A'-0</td><td>C'-0</td></tr><tr><td>0</td><td>375</td><td>375</td><td>375</td><td></td><td></td></tr><tr><td>10</td><td>368</td><td>366</td><td>368</td><td></td><td></td></tr><tr><td>20</td><td>355</td><td>342</td><td>349</td><td></td><td></td></tr><tr><td>30</td><td>329</td><td>302</td><td>318</td><td></td><td></td></tr><tr><td>40</td><td>277</td><td>248</td><td>271</td><td></td><td></td></tr><tr><td>50</td><td>224</td><td>191</td><td>217</td><td></td><td></td></tr><tr><td>60</td><td>163</td><td>142</td><td>145</td><td></td><td></td></tr><tr><td>70</td><td>85</td><td>71</td><td>84</td><td></td><td></td></tr><tr><td>80</td><td>31</td><td>22</td><td>25</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>																A-0	B-B	C-0	A'-0	C'-0	0	375	375	375			10	368	366	368			20	355	342	349			30	329	302	318			40	277	248	271			50	224	191	217			60	163	142	145			70	85	71	84			80	31	22	25			90						100						110						120						130						140						150						160						170						180					
	A-0																B-B	C-0	A'-0	C'-0																																																																																																																				
0	375																375	375																																																																																																																						
10	368																366	368																																																																																																																						
20	355	342	349																																																																																																																																					
30	329	302	318																																																																																																																																					
40	277	248	271																																																																																																																																					
50	224	191	217																																																																																																																																					
60	163	142	145																																																																																																																																					
70	85	71	84																																																																																																																																					
80	31	22	25																																																																																																																																					
90																																																																																																																																								
100																																																																																																																																								
110																																																																																																																																								
120																																																																																																																																								
130																																																																																																																																								
140																																																																																																																																								
150																																																																																																																																								
160																																																																																																																																								
170																																																																																																																																								
180																																																																																																																																								
保守率		配光曲線 (cd/1000 lm) 																																																																																																																																						
良																																																																																																																																								
中																																																																																																																																								
否																																																																																																																																								