
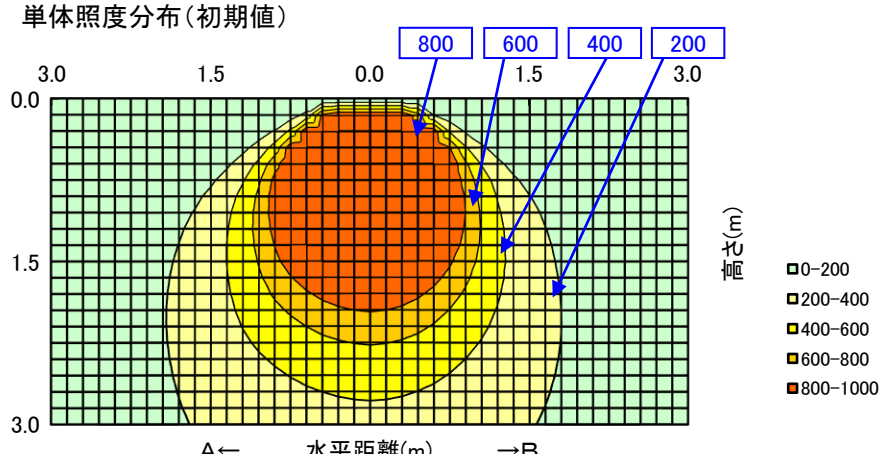


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: TE324AN-JZU14A	室指数	固有照明率 S/H=1.0														
〈備考〉	0.6	0.60	0.48	0.41	0.58	0.48	0.40	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33	
	0.8	0.69	0.59	0.51	0.68	0.58	0.51	0.45	0.56	0.50	0.45	0.55	0.49	0.45	0.43	
姿図 	1	0.76	0.66	0.58	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.62	0.56	0.52	0.50	
	1.25	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.70	0.64	0.60	0.68	0.63	0.59	0.57	
	1.5	0.86	0.78	0.72	0.84	0.77	0.71	0.66	0.75	0.70	0.66	0.73	0.69	0.65	0.63	
	2	0.92	0.85	0.79	0.90	0.84	0.79	0.74	0.82	0.77	0.74	0.80	0.76	0.73	0.70	
	2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.79	0.84	0.81	0.78	0.75	
	3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78	
	4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83	
光源形式 -	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86	
器具光束 8,260 lm	7	1.04	1.02	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91	
	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.94	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.30 H																
B-B 1.20 H																
保守率	良	0.86														
	中	0.81														
	否	0.76														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	375	375	375													
10	368	366	368													
20	355	342	349													
30	329	302	318													
40	277	248	271													
50	224	191	217													
60	163	142	145													
70	85	71	84													
80	31	22	25													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																
		配光曲線 (cd/1000 lm) 